

# Application Assessment Panel Minutes

**Tuesday 9 December 2008**

## TABLE OF CONTENTS

D1	Confirmation of Minutes of meeting held on 2 December 2008.....	4
D2	DA108/2008 – 28 Duxford Street, Paddington – Alterations & additions to terrace – 4/3/2008 .....	4
D3	DA461/2008 – 149 Queen Street, Woollahra – Section 82A Review of Refusal – 9/10/2008 .....	46
D4	DA490/2008 – 115 Queen Street, Woollahra – Substantial alterations & additions to existing dwelling-house – 5/8/2008.....	60

# Application Assessment Panel Minutes

**Minutes of the Meeting held on  
Tuesday 9 December 2008 at 3.00pm**

Present: Application Assessment Panel:

A Coker (Director – Planning & Development) (Chair)  
C Bluett (Manager – Strategic Planning)  
C Jenner (Acting Manager - Compliance)

Staff: A Gilderdale (Assessment Officer)  
M Kelly (Secretary – Administration)  
S Taylor (Senior Assessment Officer)  
D Waghorn (Senior Assessment Officer)

Apologies: Apologies were received and accepted from  
T Tuxford (Manager – Compliance)

---

## **Late Correspondence**

Late correspondence was submitted to the Panel in relation to Items: Nil

---

## **Declarations of Interest**

Nil

---

---

**Items Decided by the Panel using its delegated authority (Items D1 to D5)**

---

**Item No:** D1 Delegated to the Panel  
**Subject:** **Confirmation of Minutes of meeting held on 2 December 2008**  
**Author:** Marie Kelly, Secretary – Administration  
**File No:** See Application Assessment Panel Minutes  
**Reason for Report:** The Minutes of the Meeting of Tuesday 2 December 2008 were previously circulated. In accordance with the guidelines for Committees' operations it is now necessary that those Minutes be formally taken as read and confirmed.

**(Bluett/Jenner)**

**Resolved:**

That the Minutes of the Application Assessment Panel Meeting of 2 December 2008 be taken as read and confirmed.

---

**D2 DA108/2008 – 28 Duxford Street, Paddington – Alterations & additions to terrace – 4/3/2008**

**Note:** Mr P Graus, architect for the applicant, addressed the Panel.

**Note:** The Panel amended the preamble and part a. of Condition C.1 (Modification of details of the development (s80A(1)(g) of the Act)).

**(Jenner/Bluett)**

**Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979**

THAT the Council, as the consent authority, is of the opinion that the objection under *State Environmental Planning Policy No. 1 – Development Standards* to the Height (9.5m) development standard under the Woollahra Local Environment Plan 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the development will be consistent with the adjoining residential neighbourhood, will not have unreasonable adverse amenity impacts on adjoining properties and will achieve the objectives of the height standard.

**AND**

THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to DA 108/2008/1 is consistent with the aims of the Policy, grant development consent to Development Application No. 108/2008/1 for alterations and additions to terrace on land at 28 Duxford Street Paddington, subject to the relevant standard conditions and the following special conditions:

## A. General Conditions

### A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the *Act*.

Standard Condition: A1

### A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act* 1987 as in force at the date of consent.

*Applicant* means the applicant for this Consent.

*Approved Plans* mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

*AS* or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

*BCA* means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

*Council* means Woollahra Municipal Council

*Court* means the Land and Environment Court

*Local native plants* means species of native plant endemic to Sydney’s eastern suburbs (see the brochure titled “Local Native Plants for Sydney’s Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

*Stormwater Drainage System* means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

*Owner* means the owner of the *site* and successors in title to the *site*.

*Owner Builder* has the same meaning as in the *Home Building Act* 1989.

*PCA* means the *Principal Certifying Authority* under the *Act*.

*Principal Contractor* has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

*Professional Engineer* has the same meaning as in the *BCA*.

*Public Place* has the same meaning as in the *Local Government Act 1993*.

*Road* has the same mean as in the *Roads Act 1993*.

*SEE* means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

*Site* means the land being developed subject to this consent.

*WLEP 1995* means *Woollahra Local Environmental Plan 1995*

*Work* for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piering, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

**Note: Interpretation of Conditions** - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.

Standard Condition: A2

### A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp "Approved DA Plans" **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
A-DA-2001C	Floor Plan – Lower Ground Floor Level	COX	29.08.08
A-DA-2002C	Floor Plan – Upper Ground Level	COX	29.08.08
A-DA-2003C	Floor Plan – First Level	COX	29.08.08
A-DA-2004C	Floor Plan – Attic Level	COX	29.08.08
A-DA-2005C	Floor Level – Roof Level	COX	29.08.08
A-DA-3001C	Section A	COX	29.08.08
A-DA-3002C	Section B	COX	29.08.08
A-DA-3003C	Cross Sections C & D	COX	29.08.08
A-DA-4001C	Elevation Southwest	COX	29.08.08
A-DA-4002C	Front & Rear Elevations	COX	29.08.08
L_4001F	Landscape Plan	Context	10.10.08
L_4002D	Landscape Sections & Typical Details	Context	10.10.08
L_4001B	Trees to be Removed	Ciontext	10.10.08

Arborcraft	Arborist Report	Bruce Macleod	13.10.08
GBGA0824-01A	Ground Penetrating Radar Report & Tree Root Map	GBG Australia	16.09.08
SK100P1	Driveway Plan and Details	Partridge Partners	18.11.08
SK100P1	Driveway Details	Partridge Partners	18.11.08
J2007-0127.002-emg	Suggested Temporary Shoring of Excavation for New Garage at 28 Duxford Street, Paddington (Letter)	Partridge Partners	28.08.08
VS 25037	Geotechnical Report	Jack Hodgson Consultancy Pty Ltd	20.12.07
A36853	BASIX Certificate	NSW Government Department of Planning	12.06.08

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

#### **A.4 Ancillary Aspect of the Development (s80A(2) of the Act)**

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

**Note:** This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.  
Standard Condition: A8

#### **A.5 Development Consent is not granted in relation to these matters**

This approval does not give consent to air conditioning. A separate Development Consent or Complying Development Certificate and Part 4A Certificates, as appropriate, will need to be obtained prior to the such development work commencing.

Standard Condition: A9

#### **A.6 Prescribed Conditions**

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

**Note:** It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at [www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)

Standard Condition: A30

## B. Conditions which must be satisfied prior to the demolition of any building or construction

### B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

**Note:** See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.  
Standard Condition: B1

### B.2 Establishment of Tree Protection Zones

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

a) Tree Protection Zone areas

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
9	<i>Camellia sasanqua</i> Camellia	Rear yard of 30 Duxford Street Paddington, north eastern side	1.5
10	<i>Magnolia x soulangeana</i> Saucer Magnolia	Rear yard of 30 Duxford Street Paddington, north eastern side	1.5
11	<i>Flindersia australis</i> Crow's Ash	Front of property	1.5

**\*NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- c) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- d) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- e) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- f) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

## **C. Conditions which must be satisfied prior to the issue of any construction certificate**

### **C.1 Modification of details of the development (s80A(1)(g) of the Act)**

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. Except as may be required for maintenance purposes the proposed roof garden over the garage shall be non trafficable. A timber or metal balustrade shall be erected across the full width of the site to a height of 1.0m above the finished floor level of the courtyard [RL 44.065]. The balustrade shall be setback a minimum of 5.75m from the rear boundary of the site and located on the courtyard side of the non trafficable roof garden. This condition has been imposed in order to ensure that the area above the garage is non trafficable and to prevent direct overlooking of adjoining properties.
- b. In accordance with guideline and control G8 of Part 5.2.1 of the PDCP 1999, the dormer window cheeks shall be clad in timber weatherboards. The proposed dormer window shall incorporate either a double hung window or pivoting casement window.
- c. In accordance with guideline and control G1 of Part 5.2.9 of the PDCP 1999, the external colour scheme shall respond appropriately to the historic context of the terrace, the group and amenity of the Paddington Heritage Conservation Area.
- d. The proposed pipe running on Council's footpath is to be removed.
- e. The stormwater discharge pipe from the rear of the property is to discharge directly to the K&G at the rear of the site.
- f. The final K&G and road pavement adjustment and alignment are to comply with Council's site engineer instructions.

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

### **C.2 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)**

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> Use Calculator: <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation or use their online calculator	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit -</b> Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$14,000	No	T115
<b>Tree Damage Security Deposit –</b> Making good any damage caused to any public tree as a consequence of the doing of anything to which the consent relates.	\$150	No	T114
<b>Infrastructure Works Bond -</b> Completing any public work (such as road work, kerbing and guttering, footway construction, stormwater drainage and environmental controls) required in connection with the consent.	\$12,000	No	T112
<b>DEVELOPMENT LEVY</b> under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy (S94A)	\$6000 + Index Amount	Yes, quarterly	T96
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Public Tree Management Inspection Fee	\$160	No	T95
Public Road and Footpath Infrastructure Inspection Fee	\$375	No	T45
Security Administration Fee	\$175	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>	\$32,860 Plus any relevant indexed amounts and long service levy		

### Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

**Note:** The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

**How must the payments be made?**

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

**How will the section 94A levy be indexed?**

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

**Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

**Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

### C.3 BASIX commitments

The *applicant* must submit to the *Certifying Authority BASIX Certificate* No. A36853 with any application for a *Construction Certificate*.

**Note:** Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

**Note:** Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"

Standard Condition: C7

#### **Road and Public Domain Works – Council approval required**

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to Council's Development Engineer and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*. To accommodate this requirement, the following infrastructure works must be carried out on Council property at the Applicants expense:

#### Road & Footpath

- Full width vehicular crossings having a width of 3.7m including new layback and gutter in accordance with Council's standard drawing RF2 (the gutter is to match existing widths approximately 300mm).
- Reinstatement of footpath, kerb and gutter to match existing.
- Re-grade the road pavement and K&G in accordance with plans by Partridge Partners, dated 18/11/2008, Dwgs No. SK100 and SK 101 issue P1

**Note:** The final K&G and road pavement adjustment and alignment are to comply with Council's site engineer instructions

#### Bond

- A bond of \$ 12,000 will be used as security to ensure the satisfactory completion of the infrastructure works. The security or bank guarantee must be the original and not have an expiry date.

- Council may use all or part of the Infrastructure Bond as well as the Property Damage Security Deposit to meet the cost of removing or completing the works if they do not meet Council's requirements.
- The Deposit/Bond will not be released until Council has inspected the site and is satisfied that the Works have been completed in accordance with Council approved drawings and to Council requirements

An "Application to carry out works in a Public Road" form (available from Councils web-site <http://www.woollahra.nsw.gov.au>) must be completed and lodged, with the Application fee, at Councils Customer Services counter. Detailed engineering plans and specifications of the works required by this Condition must accompany the Application form. The plans must clearly show the following:

- Engineering drawings (plan, sections and elevation views) and specifications of the footpath, driveways, kerb & gutter, new gully pit showing clearly the connection point of site outlet pipe(s). Note, the connection drainage lines must be as direct as possible and generally run perpendicular to the kerb alignment.
- Engineering drawings of the new drainage line to be constructed joining the new and existing drainage pits including services.

The design of the works must be in accordance with Council's Draft Stormwater Drainage Management DCP (Draft Version 1, Public Exhibition Copy dated 23/08/2004) available from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au). Four weeks should be allowed for assessment.

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act* 1993.

All public domain design and construction works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

**Note:** Four (4) weeks is to be allowed for the *Roads Act* assessment

**Note:** *Road* has the same meaning as in the *Roads Act* 1993.

**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act* 1993 approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

#### C.4 Utility Services Generally

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

**Note:** Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

**Note:** The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.

**Note:** This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest.  
Standard Condition: C20

## C.5 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

**Note:** This condition has been imposed to eliminate potential water pollution and dust nuisance.

**Note:** The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

**Note:** The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/> .

**Note:** Pursuant to clause 161(1)(a)(5) of the *Regulation an Accredited Certifier* may satisfied as to this matter.  
Standard Condition: C25

## C.6 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

**Note:** This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.  
Standard Condition: C35

## C.7 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

## C.8 Tree Management Details

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation must, show the following information;

- a. trees to be numbered in accordance with these conditions,
- b. shaded green where required to be protected and retained,
- c. shaded yellow where required to be transplanted,
- d. shaded blue where required to be pruned,
- e. shaded red where authorised to be removed and,
- f. references to applicable tree management plan, arborists report, transplant method statement or bush regeneration management plan.

Standard Condition: C30

## C.9 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:
  - i. Will detect any settlement associated with temporary and permanent works and structures;
  - ii. Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
  - iii. Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);
  - iv. Will detect groundwater changes calibrated against natural groundwater variations;details:
  - the location and type of monitoring systems to be utilised;
  - the preset acceptable limits for peak particle velocity and ground water fluctuations;
  - recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
  - a contingency plan.

Standard Condition: C40

### **C.10 Bicycle, Car and Commercial Parking Details**

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.

Standard Condition: C45

**C.11 Stormwater management plan (Clause 25(2) WLEP 1995)**

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include a *Stormwater Management Plan* for the site.

The *Stormwater Management Plan* must detail:

- a) general design in accordance with Stormwater disposal concept plan prepared by Jack Hodgson Consultants P/L, dated 26/02/2008, Dwg No. 25037-H1 other than amended by this and other conditions;
- b) the discharge of stormwater, by direct connection, to K&G;
- c) compliance the objectives and performance requirements of the BCA;
- d) any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- e) general compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1.1 public exhibition copy dated 14/12/2006)

The *Stormwater Management Plan* must include the following specific requirements:

**Layout plan**

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off*, 1987 edition or most current version thereof.

It must include:

- All pipe layouts, dimensions, grades, lengths and material specification,
- All invert levels reduced to Australian Height Datum (AHD),
- Location and dimensions of all drainage pits,
- Point and method of connection to Councils drainage infrastructure.

Subsoil Drainage - Subsoil drainage details, clean out points, discharge point.

**Note:** This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

**D. Conditions which must be satisfied prior to the commencement of any development work****D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),  
or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

## **D.2 Dilapidation Reports for existing buildings**

Dilapidation surveys must be conducted and dilapidation reports prepared by a *professional engineer* (structural) of all buildings on land whose title boundary abuts the site and of such further buildings located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration.

These properties must include (but is not be limited to):

- a. 26 Duxford Street, Paddington
- b. 30 Duxford Street, Paddington

The dilapidation reports must be completed and submitted to *Council* with the *Notice of Commencement* prior to the commencement of any *development work*.

Where excavation of the site will extend below the level of any immediately adjoining building the *principal contractor* or *owner builder* must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the *notice of commencement* required by s81A(2) of the *Act* not less than two (2) days prior to the commencement of any work.

*Note: The reasons for this condition are:*

- *To provide a record of the condition of buildings prior to the development being carried out*
- *To encourage developers and its contractors to use construction techniques that will minimise the risk of damage to buildings on neighbouring land*

*Also refer to the Dilapidation Report Advising for more information regarding this condition*  
Standard Condition: D4

### D.3 Adjoining buildings founded on loose foundation materials

The *principal contractor* must ensure that a *professional engineer* determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The *professional engineer* (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the *principal contractor* must comply with any reasonable direction of the *professional engineer*.

**Note:** A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.

Standard Condition: D6

### D.4 Establishment of Tree Protection Zones

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

a) Tree Protection Zone areas

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
9	<i>Camellia sasanqua</i> Camellia	Rear yard of 30 Duxford Street Paddington, north eastern side	1.5
10	<i>Magnolia x soulangeana</i> Saucer Magnolia	Rear yard of 30 Duxford Street Paddington, north eastern side	1.5
11	<i>Flindersia australis</i> Crow's Ash	Front of property	1.5

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- c) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- d) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- e) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- f) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

**Note:** Water Restrictions take precedence over this condition. Having regard to water restrictions manual hosing may be necessary.  
Standard Condition: D8

## D.5 Construction Management Plan

As a result of the site constraints, limited space and access a Construction Management Plan is to be submitted to Council. Due to the lack of on-street parking availability a Work Zone may be required from Council during construction.

A construction management plan must be submitted and approved by Council's Development Engineer. The plan must:-

- a. describe the anticipated impact of the construction works on:**
  - local traffic routes
  - pedestrian circulation adjacent to the building site
  - and on-street parking in the local area, and;
- b. describe the means proposed to:**
  - manage construction works to minimise such impacts,
  - provide for the standing of vehicles during construction,
  - provide for the movement of trucks to and from the site, and deliveries to the site, and;
- c. show the location of:**
  - any site sheds and any anticipated use of cranes and concrete pumps,
  - any areas of Council property on which it is proposed to install a Works Zone (Construction Zone),
  - structures to be erected such as hoardings, scaffolding or shoring,
  - any excavation.
- d. describe the excavation impact on the area including**
  - Number and types of trucks to be used
  - Time frame
  - Streets to be used
  - Routes to be taken
  - Directions of travel
  - Truck storage areas
  - It is recommended that vehicle routes be shared
  - Excavation is to only be carried out outside peak and school hours between 9.30am to 2.30pm week days
  - The CMP is to include both demolition and excavation works.
- e. show the location** of all Tree Protection (Exclusion) Zones as required within the conditions of this development consent.

The Plan must make provision for all materials, plant, etc. to be stored within the development site at all times during construction. Structures or works on Council property such as hoardings, scaffolding, shoring or excavation need separate approval from Council. Standing of cranes and concrete pumps on Council property will need approval on each occasion.

**Note:** A minimum of eight weeks will be required for assessment. Work must not commence until the Construction Management Plan is approved. Failure to comply with this condition may result in fines and proceedings to stop work.  
Standard Condition: D9

**D.6 Work (Construction) Zone – Approval & Implementation**

A work zone is required for this development. The *principal contractor* or *owner* must apply for, obtained approval for, pay all fees for and implemented the required work zone before commencement of any work.


The *principal contractor* must pay all fees associated with the application and occupation and use of the road as a work zone. All Work Zone signs must have been erected by Council to permit enforcement of the work zone by Rangers and Police before commencement of any work. Signs are not erected until full payment of work zone fees.

**Note:** The *principal contractor* or *owner* must allow not less than four weeks (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under the Clause 22 of the *Transport Administration (General) Regulation 2000* to exercise those functions delegated by the Roads and Traffic Authority under Section 50 of the *Transport Administration Act 1988*.


**Note:** The enforcement of the work zone is at the discretion of Council’s Rangers and the NSW Police Service. The principal contractor must report any breach of the work zone to either Council or the NSW Police Service.  
Standard Condition: D10

**D.7 Security Fencing, Hoarding and Overhead Protection**

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

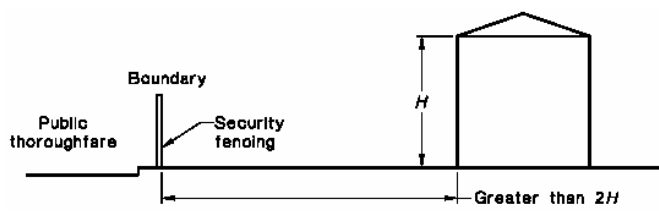

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

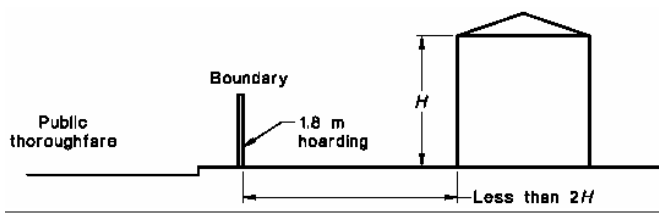


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- a. the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- b. the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- a. extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- b. have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- c. together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

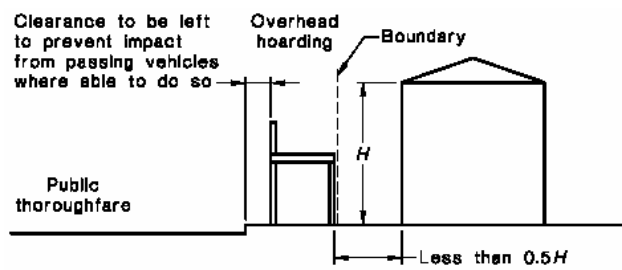

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/ohheadprotstructs.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

**Note:** The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.  
Standard Condition: D11

## D.8 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State’s building laws.”

**Note:** *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

## D.9 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

***accredited sewage management facility*** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

***approved by the council*** means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

***public sewer*** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

***sewage management facility*** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**Note:** This condition does not set aside the requirement to comply with Workcover NSW requirements.  
Standard Condition: D13

#### **D.10 Erosion and Sediment Controls – Installation**

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (‘The Blue Book’).

Where there is any conflict The Blue Book takes precedence.

**Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

**Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

**Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”  
**Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

Standard Condition: D14

#### **D.11 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and

- ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
- i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
- i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) .

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.  
Standard Condition: D15

## **D.12 Notification of Home Building Act 1989 requirements**

- a. For the purposes of section 80A (11) of the *Act*, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:

- i. in the case of work for which a *principal contractor* is required to be appointed:
  - the name and licence number of the principal contractor, and
  - the name of the insurer by which the work is insured under Part 6 of that Act,
- ii. in the case of work to be done by an owner-builder:
  - the name of the owner-builder, and
  - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.  
Standard Condition: D17

### **D.13 Establishment of boundary location, building location and datum**

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;
- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

**Note:** Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

**Note:** On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.  
Standard Condition: D18

## **E. Conditions which must be satisfied during any development work**

### **E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

## **E.2 Compliance with Australian Standard for Demolition**

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

## **E.3 Compliance with Construction Management Plan**

All development activities and traffic movements must be carried out in accordance with the approved construction management plan.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

**Note:** Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.

Standard Condition: E3

## **E.4 Requirement to notify about new evidence**

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

## **E.5 Critical Stage Inspections**

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*.

*critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

**Note:** The *PCA* may require inspections beyond mandatory critical stage inspections in order that the *PCA* be satisfied that work is proceeding in accordance with this consent.

**Note:** The *PCA* may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the *BCA* in relation to any matter relevant to the development.

Standard Condition: E5

## **E.6 Hours of Work –Amenity of the neighbourhood**

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

## **E.7 Maintenance of Vehicular and Pedestrian Safety and Access**

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.

- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## **E.8 Tree Preservation & Approved Landscaping Works**

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a) The following trees must be retained:

**Trees on Private Land**

Council Reference No:	Species	Location	Dimension (Metres)
9	<i>Camellia sasanqua</i> Camellia	Rear yard of 30 Duxford Street Paddington, north eastern side	6 x 5
10	<i>Magnolia x soulangeana</i> Saucer Magnolia	Rear yard of 30 Duxford Street Paddington, north eastern side	6 x 4

**Trees on Council Land**

Council Reference No:	Species	Location	Dimension (Metres)	Tree Value
11	<i>Flindersia australis</i> Crow's Ash	Front of property	2 x 0.5	\$150.00

**Note:** The tree trees required to be retained should appear coloured green on the construction certificate plans.

b) The following trees may be removed:

Council Reference No:	Species	Location	Dimension (Metres)
1, 2, 3, 4	<i>Chrysalidocarpus lutescens</i> Golden Cane Palm	Rear yard adjacent rear boundary and north eastern boundary	5 x 3 each
5	<i>Archontophoenix cunninghamiana</i> Bangalow Palm	Rear yard adjacent rear boundary	10 x 4
6	<i>Trachycarpus fortunei</i> Chinese Windmill Palm	Rear yard adjacent rear boundary	6 x 3
7	<i>Archontophoenix cunninghamiana</i> Bangalow Palm	Rear yard adjacent rear boundary	10 x 4
8	<i>Camellia sasanqua</i> Camellia	Rear yard south western side	5 x 4

**Note:** The tree trees that may be removed should appear coloured red on the construction certificate plans.

**1. Replacement trees which must be planted**

The following compensatory replacement plantings must be planted to ensure the preservation of the landscape character of the area. Areas for future planting must be plotted on the submitted landscape or architectural plans and be protected from damage, especially soil compaction and contamination from construction activity by erecting a barrier or implementing ground protection. Where ground protection during construction activity is not implemented, remediation measures prior to planting such as soil ripping or subsoil aeration must be employed.

Any replacement plant is to be maintained in a healthy and vigorous condition until it attains a height of 5 metres or a spread of 3 metres, whereby it will be protected by Council's Tree Preservation Order. If the replacement plant is found to be faulty, damaged, dying or dead before it attains a size whereby it is protected by Council's Tree Preservation Order, it must be replaced with another of the same species which complies with the criteria outlined below.

Species/Type	Planting Location	Container Size or Size of Tree (@ time of planting)	Minimum Dimensions at Maturity
1 x <i>Lagerstroemia indica</i> Crepe Myrtle	Rear yard north eastern side as per the submitted Context landscape plan dated 10/10/08	75 litre	8 metres high
All replacement trees are to be NATSPEC grown.			

## 2. Level changes in the vicinity of trees

No level changes are to occur within the specified radius from the trunks of the following trees to allow for the preservation of their root zones.

Council Reference No:	Species	Location	Radius from Trunk (metres)
9	<i>Camellia sasanqua</i> Camellia	Rear yard of 30 Duxford Street Paddington, north eastern side	1.5

## 3. Hand excavation within tree root zones

To prevent damage to roots and compaction within the root zone, excavation undertaken within the specified radius from the trunks of the following trees must be hand dug. Small hand tools only are to be utilised, mattocks and similar digging tools are not to be used within these areas. No root with a diameter equal to or in excess of 50mm is to be cut unless approved, in writing, by a qualified Arborist (minimum qualification of Australian Qualification Framework Level 4 or recognised equivalent).

All root pruning must be undertaken in accordance with the *Australian Standard 4373 "Pruning of Amenity Trees"* and carried out by a qualified Arborist (minimum qualification of *Australian Qualification Framework Level 4* or recognised equivalent).

Any exposed surface roots must be covered to prevent drying out and watered. Materials used to minimise surface roots drying out include leaf litter mulch or a geotextile fabric.

Beyond this radius, mechanical excavation is permitted, when root pruning by hand along the perimeter line of such works is completed.

Council Reference No:	Species	Location	Radius from Trunk (metres)
9	<i>Camellia sasanqua</i> Camellia	Rear yard of 30 Duxford Street Paddington, north eastern side	2.5*

\* All excavation to be in accordance with the submitted Partridge Partners engineering details and correspondence dated 28/08/08 and the submitted Arborcraft Tree report dated 13/10/08.

## E.9 Tree Preservation

All persons must comply with Council's *Tree Preservation Order* ("the TPO"), other than where varied by this consent. The order applies to any tree, with a height greater than 5 metres or a diameter spread of branches greater than 3 metres, is subject to Council's Tree Preservation Order unless, exempted by specific provisions. Works to be carried out within a 5 metre radius of any tree, subject to the Tree Preservation Order, require the prior written consent of Council.

### General Protection Requirements:

- a) There must be no excavation or *work* within the required Tree Protection Zone(s). The Tree Protection Zone(s) must be maintained during all *development work*.
- b) Where excavation encounters tree roots with a diameter exceeding 50mm excavation must cease. The *principal contractor* must procure an inspection of the tree roots exposed by a qualified arborist. Excavation must only recommence with the implementation of the recommendations of the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.
- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.

**Note:** Trees must be pruned in accordance with Australian Standard AS 4373 – 2007 "Pruning of Amenity Trees" and Workcover NSW Code of Practice Amenity Tree Industry 1998.  
Standard Condition: E8

## E.10 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls;
- b) Dust controls;
- c) Dewatering discharges;
- d) Noise controls;
- e) Vibration monitoring and controls; and
- f) Ablutions.

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## E.11 Compliance with Geotechnical/Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

**Note:** The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.

Standard Condition: E12

## E.12 Support of adjoining land and buildings

A person must not do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

**Note:** This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

**Note:** Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

**Note:** The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council's care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

Standard Condition: E13

## E.13 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

#### **E.14 Disposal of site water during construction**

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act 1993*;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act 1997*, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

**Note:** This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.  
Standard Condition: E17

#### **E.15 Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum**

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA's* satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.
- g) Flood protection measures are in place confirming location, height and capacity.

**Note:** This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.  
Standard Condition: E20

### **E.16 Placement and use of Skip Bins**

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

### **E.17 Prohibition of burning**

There must be no burning of any waste or other materials. The burning of CCA (copper chrome arsenate) or PCP (pentachlorophenol) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.

**Note:** Pursuant to the *Protection of the Environment Operations (Control of Burning) Regulation 2000* all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning.  
Standard Condition: E22

### **E.18 Dust Mitigation**

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.

- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

### **E.19 Compliance with Council’s Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway**

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

**Note:** A copy of Council’s “*Specification for Roadworks, Drainage and Miscellaneous Works*” can be down loaded free of charge from Council’s website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)  
Standard Condition: E24

### **E.20 Replacement of Sandstone Kerb or Gutter**

Where existing sandstone kerb or gutter is to be replaced in concrete, the sandstone remains the property of Council. The stones are to be removed and handled in such a manner so as not to cause any damage to the sandstone.

The stones must be delivered on pallets between 7am to 4pm Monday to Friday by the *Principal Contractor or Owner* to:

Woollahra Council’s Works Depot  
52-54 O’Dea Avenue  
Waterloo

Prior to delivery contact the Purchasing Officer, Mr Joe Cavagnino, on 9391 7973.  
Standard Condition: E25

## **F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

### **F.1 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building.  
Standard Condition: F1

### **F.2 Amenity Landscaping**

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site.

**Note:** This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.  
Standard Condition: F6

### **F.3 Commissioning and Certification of Systems and Works**

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, Development Standards, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

### **G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

No relevant conditions.

### **H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

#### **H.1 Fulfillment of BASIX commitments – Clause 154B of the Regulation**

All BASIX commitments must be effected in accordance with the BASIX Certificate No. A36853.

**Note:** Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled." Standard Condition: H7

#### **H.2 Landscaping**

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan, arborist report, transplant method statement and tree management plan. The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

**Note:** This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H9

#### **H.3 Removal of Ancillary Works and Structures**

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H12

#### **H.4 Road Works (including footpaths)**

The following works must be completed to the satisfaction of Council, in compliance with Council’s “Specification for Roadworks, Drainage and Miscellaneous Works” dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor’s* or *owner’s* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. relocation of existing power/light pole
- f. relocation/provision of street signs
- g. new or replacement street trees;
- h. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- i. new or reinstated kerb and guttering within the *road*; and
- j. new or reinstated road surface pavement within the *road*.

**Note:** Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council's customer service centre.  
Standard Condition: H13

## **I. Conditions which must be satisfied during the ongoing use of the development**

### **I.1 Maintenance of BASIX commitments**

All BASIX commitments must be maintained in accordance with the BASIX Certificate No. A36853.

**Note:** This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.  
Standard Condition: I7

### **I.2 Maintenance of Landscaping**

All landscaping must be maintained in general accordance with this consent.

This condition does not prohibit the planting of additional trees or shrubs subject that they are native species endemic to the immediate locality.

**Reason:** This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

**Note:** This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled "Local Native Plants for Sydney's Eastern Suburbs" published by Woollahra, Waverley, Randwick and Botany Bay Councils.  
Standard Condition: I8

### **I.3 Clothes drying**

No clothes, linen or the like must be hung from any balcony, terrace or veranda such that they are visible from any public place.

**Reason:** This condition has been imposed to ensure that the visual amenity of the neighbourhood is not detrimentally affected by a proliferation of such practices.  
Standard Condition: I9

#### I.4 Removal of Graffiti

All graffiti must be removed or obliterated from buildings and fences within 72 hours.

**Reason:** This condition has been imposed to ensure the quality of our urban environment is not degraded by the accumulations of graffiti.

**Note:** Procedures for working with graffiti are contained in a special training program available from the Master Painters Australia NSW Association Inc. See: <http://www.masterpainters.com.au/>  
Standard Condition: I26

#### I.5 Outdoor lighting – Residential

Outdoor lighting must comply with AS 4282-1997: Control of the obtrusive effects of outdoor lighting. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.

**Reason:** This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.

**Note:** This condition has been imposed to control the obtrusive effects of outdoor lighting.  
Standard Condition: I42

#### I.6 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

**Reason:** This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nlg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

**Useful links:**

**Community Justice Centres**—free mediation service provided by the NSW Government ([www.cjc.nsw.gov.au](http://www.cjc.nsw.gov.au)).

**Department of Environment and Conservation NSW**, Noise Policy Section web page ([www.environment.nsw.gov.au/noise](http://www.environment.nsw.gov.au/noise)).

**New South Wales Government Legislation** home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* ([www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)).

**Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au/index.php](http://www.acoustics.asn.au/index.php)).

**Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).

Department of Gaming and Racing - ([www.dgr.nsw.gov.au](http://www.dgr.nsw.gov.au)).

Standard Condition: I50

## J. Miscellaneous Conditions

No relevant conditions.

## K. Advisings

### K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

#### Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

#### Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of the *Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

### K.2 Dial before you dig



The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

### **K.3 Builders Licences and Owner Builders Permits**

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

### **K.4 Building Standards - Guide to Standards and Tolerances**

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

### **K.5 Workcover requirements**

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW's website:  
<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:  
Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW,  
Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.  
Standard Condition: K7

## **K.6 Asbestos Removal, Repair or Disturbance**

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

**Note:** The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) or one of Workcover NSW's offices for further advice.  
Standard Advising: K8

## **K.7 Lead Paint**

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1-1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2-1998, Guide to Lead Paint Management—Residential and Commercial Buildings.

Industrial paints may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.

Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

Standard Advising: K9

## K.8 Dividing Fences

The erection of dividing fences under this consent does not affect the provisions of the *Dividing Fences Act 1991*. Council does not adjudicate civil disputes relating to the provision of, or payment for, the erection of dividing fences.

**Note:** Further information can be obtained from the NSW Department of Lands - <http://www.lands.nsw.gov.au/LandManagement/Dividing+Fences.htm>. Community Justice Centres provide a free mediation service to the community to help people resolve a wide range of disputes, including dividing fences matters. Their service is free, confidential, voluntary, timely and easy to use. Mediation sessions are conducted by two impartial, trained mediators who help people work together to reach an agreement. Over 85% of mediations result in an agreement being reached. Mediation sessions can be arranged at convenient times during the day, evening or weekends. Contact the Community Justice Centre either by phone on 1800 671 964 or at <http://www.cjc.nsw.gov.au/>.  
Standard Advising: K10

## K.9 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

**Mr. A Gilderdale, Assessment Officer** on (02) 9391 7063.

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

## K.10 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>  
Standard Condition: K15

### **K.11 Recycling of Demolition and Building Material**

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

### **K.12 Owner Builders**

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See [www.fairtrading.nsw.gov.au](http://www.fairtrading.nsw.gov.au).

Standard Condition: K18

### **K.13 Pruning or Removing a Tree Growing on Private Property**

Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

### **K.14 Compliance with the Building Code of Australia**

Preliminary assessment of the development application drawings indicates that the proposal may not comply with the following sections/parts of the *Building Code of Australia*:

Part 3.3.4 - Weatherproofing of masonry

Part 3.4.1 - Sub floor ventilation

Part 3.7 - Fire safety

Part 3.7.1 Fire separation

Part 3.7.2 Smoke alarms

Part 3.7.3 Heating appliances

Part 3.8 - Health and amenity

Part 3.8.1 Wet areas

Part 3.8.3 Facilities

Part 3.8.4 Light  
Part 3.8.5 Ventilation  
Part 3.8.6 Sound insulation

Part 3.9 - Safe movement and access  
Part 3.9.1 Stair construction  
Part 3.9.2 Balustrades

**Note:** There must be no removal of heritage building fabric unless expressly authorised under this consent where compliance with the BCA cannot be achieved without work not authorised under this consent application to amend this consent is required.  
Standard Condition: K20 (Autotext KK20)

---

### **D3 DA461/2008 – 149 Queen Street, Woollahra – Section 82A Review of Refusal – 9/10/2008**

**Note:** Mr A Simpson the applicant, addressed the Panel.

**Note:** The Panel amended Part C and amended part a. of Condition C.1. (Modification of details of the development (s80A(1)(g) of the Act)).

**(Jenner/Bluett)**

#### **Resolved: Pursuant to Section 82A of the Environmental Planning and Assessment Act, 1979**

- A. THAT Council, as the consent authority, refuse that part of Review of Development Application No. 461/2008 for minor alterations and additions already carried out. These comprise of; removal of an internal wall between the kitchen and living area, removal of a fireplace to the living room, removal of a bathroom window and bricking up of opening, and renovation of kitchen and bathroom. Consent is refused for the following reason:
1. Council has no power under the Environmental Planning and Assessment Act 1979 to grant retrospective consent to a development application in respect of works undertaken without development consent.
- B. THAT, as the unauthorised works are considered to be satisfactory with regard to the relevant objectives and controls of Woollahra Local Environmental Plan 1995 and Woollahra Conservation Area Development Control Plan 2003, Council take no action to require these works to be removed subject to the owners making an application for, and Council issuing, a building certificate under Section 149A-149G of Environmental Planning and Assessment Act 1979 for the works. The required building certificate application is to be submitted within ninety (90) days of this determination.
- C. That the matter of unauthorised works be referred to the Compliance Manager to take appropriate action under Part 6 of the Environmental Planning and Assessment Act 1979 in accordance with Council's Enforcement Policy for failure to obtain Council's consent prior to carrying out the unauthorised works.
- D. THAT the Council, as the consent authority, grant development consent to Development Application No. 461/2008 for minor alterations and additions including two skylights and the removal of an internal wall on land at 149 Queen Street Woollahra, subject to the following conditions:

## A. General Conditions

### A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the *Act*.

Standard Condition: A1

### A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act* 1987 as in force at the date of consent.

*Applicant* means the applicant for this Consent.

*Approved Plans* mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

*AS* or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

*BCA* means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

*Council* means Woollahra Municipal Council

*Court* means the Land and Environment Court

*Local native plants* means species of native plant endemic to Sydney’s eastern suburbs (see the brochure titled “Local Native Plants for Sydney’s Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

*Stormwater Drainage System* means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

*Owner* means the owner of the *site* and successors in title to the *site*.

*Owner Builder* has the same meaning as in the *Home Building Act* 1989.

*PCA* means the *Principal Certifying Authority* under the *Act*.

*Principal Contractor* has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

*Professional Engineer* has the same meaning as in the *BCA*.

*Public Place* has the same meaning as in the *Local Government Act 1993*.

*Road* has the same mean as in the *Roads Act 1993*.

*SEE* means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

*Site* means the land being developed subject to this consent.

*WLEP 1995* means *Woollahra Local Environmental Plan 1995*

*Work* for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

**Note: Interpretation of Conditions** - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.  
Standard Condition: A2

### A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
DA-01 & DA-02	Architectural Plans	Excell Design Consultants	20/10/2008

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

#### A.4 Development Consent is not granted in relation to these matters

This approval does not give consent for any unauthorised works which have already carried out. These comprise of; removal of an internal wall between the kitchen and living area, removal of a fireplace to the living room, removal of a bathroom window and bricking up of opening, and renovation of kitchen and bathroom.

Standard Condition: A9

#### A.5 Prescribed Conditions

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

**Note:** It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at

[www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)

Standard Condition: A30

### B. Conditions which must be satisfied prior to the demolition of any building or construction

#### B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

**Note:** See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Standard Condition: B1

### C. Conditions which must be satisfied prior to the issue of any construction certificate

#### C.1 Modification of details of the development (s80A(1)(g) of the Act)

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. The skylights must have a low profile and must not exceed 150mm above the level of the existing roofing material
- b. The exclusion of the elements of the development application which are not granted development consent, as outlined in **Condition A4**.

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

## C.2 Payment of Security and Fees

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> Use Calculator: <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation or use their online calculator	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit -</b> Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$2,000	No	T115
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Security Administration Fee	\$175	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>	<b>\$2,175</b> <b>Plus any relevant indexed amounts and long service levy</b>		

### Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act*, 1986, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

**Note:** The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

#### How must the payments be made?

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

**Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

### **C.3 Structural Adequacy of Existing Supporting Structures**

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

**Note:** This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.  
Standard Condition: C35

### **C.4 Professional Engineering Details**

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

## **D. Conditions which must be satisfied prior to the commencement of any development work**

### **D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,

- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),  
or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

## D.2 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State’s building laws.”

**Note:** *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

**D.3 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.  
Standard Condition: D15

**D.4 Notification of Home Building Act 1989 requirements**

- a. For the purposes of section 80A (11) of the Act, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
  - i. in the case of work for which a *principal contractor* is required to be appointed:
    - the name and licence number of the principal contractor, and
    - the name of the insurer by which the work is insured under Part 6 of that Act,
  - ii. in the case of work to be done by an owner-builder:
    - the name of the owner-builder, and
    - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.

Standard Condition: D17

**E. Conditions which must be satisfied during any development work****E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or

- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

## E.2 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

## E.3 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)

Standard Condition: E6

## E.4 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,

- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## E.5 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- c) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

## E.6 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

**F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)****F.1 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building.  
Standard Condition: F1

**G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

No relevant conditions

**H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))****H.1 Removal of Ancillary Works and Structures**

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H12

**I. Conditions which must be satisfied during the ongoing use of the development**

No relevant conditions

**J. Miscellaneous Conditions**

No relevant conditions

**K. Advisings****K.1 Criminal Offences – Breach of Development Consent & Environmental laws**

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;

- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

### **Warnings as to potential maximum penalties**

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

### **Warning as to enforcement and legal costs**

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

## **K.2 Builders Licences and Owner Builders Permits**

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appointed a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

## **K.3 Building Standards - Guide to Standards and Tolerances**

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

#### **K.4 Workcover requirements**

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW’s website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

#### **K.5 Appeal**

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

**Sarah Court, Assessment Officer** on (02) 9391 7067

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

**D4 DA490/2008 – 115 Queen Street, Woollahra – Substantial alterations & additions to existing dwelling-house – 5/8/2008**

**Note:** Mr G Karavanas Consultant Planner and Mr S Dunkley the applicant, addressed the Panel.

**(Bluett/Jenner)**

**Resolved:**

THAT Development Application No. 490/2008 for substantial alterations and additions to existing dwelling-house on land at No.115 Queen Street, Woollahra, be referred to a future meeting of the Application Assessment Panel to allow for a detailed heritage assessment of the current proposal including:

1. The consideration of the statement of heritage impact, as required by Clause 26 (3) of the Woollahra LEP 1995
2. The appropriateness of the proposed loft over the rear lane garage in the context of Clause 13.3.4.9 of the Woollahra Heritage Conservation Area DCP
3. A detailed assessment of the proposal against Clause 32 of the Woollahra LEP 1995 including whether or not the Council can be satisfied that the conservation of the heritage item will be achieved by the Council granting the floor space exclusion.

---

There being no further business the meeting concluded at 4.10pm.

*We certify that the pages numbered 1 to 60 inclusive are the Minutes of the Application Assessment Panel Meeting held on 9 December 2008 and confirmed by the Application Assessment Panel on 16 December 2008 as correct.*

---

**Chairperson**

---

**Secretary**