

# Development Control Committee Minutes

Monday 4 August 2008

## TABLE OF CONTENTS

D1	Confirmation of Minutes of Meeting held on 21 July 2008 .....	2395
D2	DA179/2008 – 1 Arthur Street, Bellevue Hill – Substantial alterations & additions to existing dwelling – 7/4/2008.....	2395
D3	DA546/2007 Part 2 – 42 Cambridge Street, Paddington - Section 96 Application – Proposed modification to extend deck, relocate upper floor windows, alter bathroom layouts. New folding sliding window to ground floor, new carspace, addition of laundry below deck, addition of Juliet balcony – 24/4/2008 .....	2396
D4	DA546/2007 Part 2 – 42 Cambridge Street, Paddington - Section 96 Application – Proposed modification to extend deck, relocate upper floor windows, alter bathroom layouts. New folding sliding window to ground floor, new carspace, addition of laundry below deck, addition of Juliet balcony – 24/4/2008 .....	2397
D5	DA822/2007 – 42-44 Queen Street, Woollahra – Demolition of rear of existing building & erection of substantial mixed use addition with parking facilities & elevated terrace – 7/12/2007 .....	2406
D6	DA103/2008 – 6 Buckhurst Avenue, Point Piper – Substantial alterations & additions to existing residential flat building including demolition works, new basement level with swimming pool, infilling part of the void between existing residential flat building & car park, new boat store, new balconies, internal reconfigurations & landscape works – 3/3/2008 .....	2441
D7	DA932/1999 Part 3 – 144 Victoria Road, Bellevue Hill – Section 96 Application Proposed modification Condition No. 10 to allow increase in the height of landscaping on rear boundary – 13/07/2007.....	2485
D8	DA688/2007 – 7-21 Saber Street, Woollahra – Demolition of existing building & erection of new community facility building, three storeys in height with basement parking – 24/10/2007 .....	2486
D9	DA253/2008 – 33 Coolong Road, Vaucluse – Proposed new skid & landing – 6/5/2008 (See Item R2) .....	2530
D10	DA239/2008 - 44 Dover Road, Rose Bay – Alterations & additions – 29/4/2008.....	2530
D11	Register of Current Land and Environment Court Appeals for Development Applications .....	2557
R1	DA628/2007 – 7-9 Conway Avenue, Rose Bay – Demolition of two existing dwelling-houses & ancillary structures, consolidation of the (2) allotments & construction of new residential flat building containing (6) units incorporating a roof terrace & basement level parking for (15) vehicles, new swimming pool, landscaping & siteworks – 27/9/2007 .....	2558
R2	DA253/2008 – 33 Coolong Road, Vaucluse – Proposed new skid & landing – 6/5/2008...	2559

# Development Control Committee Minutes

**Minutes of the Meeting held on  
Monday 4 August 2008 at 6.00pm**

Present: His Worship The Mayor, Councillor Geoff Rundle, ex-officio (Items D1 to D6)  
Councillors Keri Huxley (Chair)  
Christopher Dawson  
Tanya Excell  
Wilhelmina Gardner  
Julian Martin (Items D1 to D10)  
David Shoebridge

Staff: Patrick Robinson (Manager – Development Control)  
George Fotis (Team Leader)  
David Waghorn (Acting Team Leader)  
Simon Taylor (Senior Assessment Officer)  
Helen Tola (Team Leader – Governance)

Session One: 6.06pm to 7.46pm  
Session Two: 8.06pm to 9.46pm

Also in Attendance: Councillor John Comino (Item D6)

---

## Leave of Absence

Leave of Absence previously granted by Council: Councillor Isabelle Shapiro

Apologies: Nil

---

## Late Correspondence

Late correspondence was submitted to the committee in relation to Items: D6, D9, D10 & R1

---

## Declarations of Interest

Nil.

---

**Note:** Item D3 (42 Cambridge Street, Paddington) and D4 (42 Cambridge Street, Paddington) were dealt with concurrently.

Item R1 (7-9 Conway Avenue, Rose Bay) was dealt with prior to Item D11 (Register of Current Land and Environment Court Appeals for Development Applications).

---

**Items Decided by this Committee using its Delegated Authority (Items D1 to D11)**

---

**Item No:** D1 Delegated to Committee  
**Subject:** **Confirmation of Minutes of Meeting held on 21 July 2008**  
**Author:** Les Windle, Manager - Governance  
**File No:** See Council Minutes  
**Reason for Report:** The Minutes of the Meeting of Monday 21 July 2008 were previously circulated. In accordance with the guidelines for Committees' operations it is now necessary that those Minutes be formally taken as read and confirmed.

(Shoebridge/Excell)

**Resolved:**

That the Minutes of the Development Control Committee Meeting of 21 July 2008 be taken as read and confirmed.

---

**D2 DA179/2008 – 1 Arthur Street, Bellevue Hill – Substantial alterations & additions to existing dwelling – 7/4/2008**

**Note:** The Committee amended dot point 1 of the Site Report Recommendation.

**Motion moved by Councillor Rundle  
Seconded by Councillor Martin**

THAT the recommendation from the site inspection to defer consideration of the application be adopted subject to dot point 1 being amended to read as follows:

To reduce the overall height of the rear portion of the development, at the eave height, by 1 metre to minimise impacts on adjoining properties including No. 3 Arthur Street, No. 104 and 106 Bellevue Road, Bellevue Hill.

**Amendment moved by Councillor Gardner**

THAT the motion moved by Councillor Rundle and Councillor Martin be adopted subject to the rear balcony of Master Bedroom 1 being deleted.

**The Amendment lapsed for want of a seconder.  
The Motion was put and carried.**

**(Rundle/Martin)****Resolved:**

THAT consideration of Development Application No. 179/2008 for substantial alterations and additions to existing dwelling on land at No. 1 Arthur Street, Bellevue Hill, be deferred for the applicant to confer with Council staff in relation to providing amended plans with regard to the following:

- To reduce the overall height of the rear portion of the development, at the eave height, by 1 metre to minimise impacts on adjoining properties including No. 3 Arthur Street, No. 104 and 106 Bellevue Road, Bellevue Hill.
- To reduce the size of the rear balcony of Master Bedroom 1 to a depth of 1m to allow only opening of doors.
- Deletion of the drying area on the first floor and that the area be non-trafficable and the acoustic issues be assessed.
- The east-facing windows of the formal dining/living areas on the ground floor are to be opaque and non-opening to protect the privacy of neighbouring properties.
- The eastern wall of the formal dining/living areas on the ground floor is set back 1.5m from the boundary.
- To reconsider the central courtyard with regard to the privacy impacts.
- To include a condition to provide dilapidation reports, if requested by neighbouring properties.
- Window to Bedroom 2 on the first floor (as referred to as the “Child Room” during site inspection) is to be specially treated in a way that protects the privacy of the neighbours on Bellevue Road.

---

**D3 DA546/2007 Part 2 – 42 Cambridge Street, Paddington - Section 96 Application – Proposed modification to extend deck, relocate upper floor windows, alter bathroom layouts. New folding sliding window to ground floor, new carspace, addition of laundry below deck, addition of Juliet balcony – 24/4/2008**

**Note:** Item D3 (42 Cambridge Street, Paddington) and D4 (42 Cambridge Street, Paddington) were dealt with concurrently.

**Note:** Following the site inspection meeting on the 21 July 2008, amended plans were submitted by the applicant. The amended plans have been assessed by Council staff in Item D4 of the agenda.

---

**D4 DA546/2007 Part 2 – 42 Cambridge Street, Paddington - Section 96 Application – Proposed modification to extend deck, relocate upper floor windows, alter bathroom layouts. New folding sliding window to ground floor, new carspace, addition of laundry below deck, addition of Juliet balcony – 24/4/2008**

**Note:** Item D3 (42 Cambridge Street, Paddington) and D4 (42 Cambridge Street, Paddington) were dealt with concurrently.

**Note:** The Committee amended part a of Condition C1 (Modification of details of the development (s80A91)(g) of the Act)).

**(Martin/Rundle)**

**Resolved: Pursuant to Section 96 of the Environmental Planning and Assessment Act, 1979**

THAT Council, as the consent authority, modify development consent to Development Application No. 546/2007 part 2 for Section 96 Modification on land at 42 Cambridge Street Paddington, in the following manner:

**Condition No. C.1 is amended as follows:**

The revised plans do not identify the material of the wall and therefore **Condition C.1** also specifies that the wall along the north elevation of the rear deck is masonry.

**C.1 Modification of details of the development (s80A(1)(g) of the Act)**

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. The 1.8m high screen wall along the northern boundary is to be constructed in accordance with the drawing dated August 2008 (louvered timber screen).
- b. The existing rear chimney to the rear wing shall be retained.
- c. The bi-fold doors off the kitchen and double swing doors off the dinging room both onto the ground floor deck on the southern side elevation must be timber framed, clear glazed doors.
- d. The enlarged first floor bathroom window on the southern side elevation must be fixed translucent glazed in order to protect the privacy of the adjoining residents at No. 40 Cambridge Street.
- e. The bi-fold timber garage door must open inwards and must not encroach on the public footpath.

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.  
Standard Condition: C4

**Condition B.2 is amended to read:**

**B.2 Establishment of Tree Protection Zones**

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

- a) Tree Protection Zone areas

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
2	<i>Eriobotrya japonica</i> Loquat tree	Rear yard southern side	3
3	<i>Melia azedarach</i> White Cedar	Rear yard north western corner	3

**\*NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- c) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- d) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- e) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- f) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

**Condition No. D.2 is amended to read:****D.2 Establishment of Tree Protection Zones**

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

- a) Tree Protection Zone areas

<b>Council Reference No:</b>	<b>Species</b>	<b>Location</b>	<b>Radius from Trunk (Metres)*</b>
2	<i>Eriobotrya japonica</i> Loquat tree	Rear yard southern side	3
3	<i>Melia azedarach</i> White Cedar	Rear yard north western corner	3

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- c) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- d) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- e) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- f) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

**Note:** Water Restrictions take precedence over this condition. Having regard to water restrictions manual hosing may be necessary.  
Standard Condition: D8

**Condition No. E.3 is amended to read:****E.3 Tree Preservation & Approved Landscaping Works**

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a) The following trees must be retained:



### Trees on Private Land

Council Reference No:	Species	Location	Dimension (Metres)
2	<i>Eriobotrya japonica</i> Loquat tree	Rear yard southern side	8 x 4
3	<i>Melia azedarach</i> White Cedar	Rear yard north western corner	5 x 4

b) The following trees may be removed:

Council Reference No:	Species	Location	Dimension (Metres)
1	<i>Castanospermum australe</i> Black Bean	Rear yard southern side	9 x 5

**Note:** The tree trees that may be removed should appear coloured red on the construction certificate plans.

### Replacement trees which must be planted

The following compensatory replacement plantings must be planted to ensure the preservation of the landscape character of the area. Areas for future planting must be plotted on the submitted landscape or architectural plans and be protected from damage, especially soil compaction and contamination from construction activity by erecting a barrier or implementing ground protection. Where ground protection during construction activity is not implemented, remediation measures prior to planting such as soil ripping or subsoil aeration must be employed.

Any replacement plant is to be maintained in a healthy and vigorous condition until it attains a height of 5 metres or a spread of 3 metres, whereby it will be protected by Council's Tree Preservation Order. If the replacement plant is found to be faulty, damaged, dying or dead before it attains a size whereby it is protected by Council's Tree Preservation Order, it must be replaced with another of the same species which complies with the criteria outlined below.

Species/Type	Planting Location	Container Size or Size of Tree (@ time of planting)	Minimum Dimensions at Maturity
1 x <i>Lagerstroemia indica</i> Crepe Myrtle	Rear yard	100 litre	Natural
All replacement trees are to be NATSPEC grown.			

### Permissible work within Tree Protection Zones

The most reliable way to ensure successful tree retention is to prohibit any construction, excavation and soil level changes within a trees calculated Tree Protection Zone. However, to allow for reasonable development, it may be necessary to undertake demolition operations and/or incorporate hard surfaces and other construction within a Tree Protection Zone. Upon completion of approved works within the Tree Protection Zone, the specified Tree Protection Zone outlined in B1/D1 is to be re-established around the tree where work has been allowed. The tree protection fencing must end at either side of the incursion. The table below provides a radius distance from the centre of the trunk of existing trees on site whereby the following incursions are permissible:

a) Permissible Work within Tree Protection Zones

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
2	<i>Eriobotrya japonica</i> Loquat tree	Rear yard southern side	3
3	<i>Melia azedarach</i> White Cedar	Rear yard north western corner	3

- b) Where excavation is undertaken within a specified Tree Protection Zone, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- c) To prevent damage to roots and compaction within the Tree Protection Zone of specified trees, excavation must be hand dug. Small hand tools only are to be utilised, mattocks and similar digging tools are not be used within these areas. No root with a diameter equal to or in excess of 50mm is to be cut unless approved, in writing, by a qualified Arborist (minimum qualification of Australian Qualification Framework Level 4 or recognised equivalent).

All root pruning must be undertaken in accordance with the Australian Standard 4373 Pruning of amenity trees and carried out by a qualified Arborist (minimum qualification of Australian Qualification Framework Level 4 or recognised equivalent).

Beyond this radius, mechanical excavation is permitted, when root pruning by hand along the perimeter line of such works is completed.

**Paving in the vicinity of trees**

Paving works within the specified radius from the trunks of the following trees must be constructed in such a way as to ensure that the existing moisture infiltration and gaseous exchange to the tree root system are maintained. When preparing an area for paving within the specified radius the soil surface should not be skimmed. A new surface must be established above the former ground level that does not inhibit gaseous exchange, such as granular fill not exceeding 100mm in depth or a load suspension layer.

Council Reference No:	Species	Location	Radius from centre of trunk (Metres)
2	<i>Eriobotrya japonica</i> Loquat tree	Rear yard southern side	3
3	<i>Melia azedarach</i> White Cedar	Rear yard north western corner	3

Paving works are to be designed in consultation with a qualified Arborist (minimum qualification of Australian Qualification Framework Level 4 or recognised equivalent) and are to utilise such measures as semiporous material.

## New Conditions

### A.4 Approved Amended (s96) Plans and supporting documents

Those acting upon or under this amended consent must carry out all work and maintain the use and works in accordance with the approved plans and supporting documents listed in the original consent, as amended by the amended approved plans and supporting documents as submitted by the Applicant and to which is affixed a Council stamp "Approved Plans" listed below otherwise than modified by further condition(s). Where the plans relate to amendments, alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
A01 Issue C	Architectural Plans	Michael Hesse and Associates Pty Ltd	June 2007
A4-01	Architectural Plans , Juliet Balcony Details	Michael Hesse and Associates Pty Ltd	July 2008

**Note:** These plans and supporting documentation may be subject to conditions modifying the development imposed under section 80A(1)(g) of the *Act* (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)

Standard Condition: A6

### C.8 Road and Public Domain Works – Council approval required

This development consent does **NOT** give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to and approved by *Council* under the *Roads Act* 1993, before the issue of any *Construction Certificate*.

Specific works include:

- A vehicular crossings to be constructed having a minimum width of 3.6 m in accordance with Council's standard drawing RF2.
- Adjustments to the vehicular access of No 40 Cambridge Street as required ensuring continued access in accordance with Council's standard drawing RF2.
- Removing or relocating existing No Parking Sign in James Lane. The sign is subject to the approval of Woollahra Traffic Committee. The applicant shall liaise with Councils Traffic Engineer regarding removal / installation and position of the new sign which will be at the full cost to the applicant
- Relocation of existing Energy Aust Pole - The proposed driveway crossing and vehicular access will require the relocation of an existing street light/power pole.

The applicant is to make written application to Council for relocation of the street light/power pole. Subject to agreement to the relocation, Council will then forward a request to Energy Australia for the relocation.

Energy Australia has requirements concerning access to services that it provides. The requirements of Energy Australia must be obtained and submitted to the Accredited Certifier.

All costs associated with the relocation of the street light must be borne by the applicant.

Contact for Council:

Mr Jake Matuzic

Ph: 9391 7134

Fax: 9391 7044

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

Four weeks should be allowed for assessment

**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition may impose one or more Infrastructure Works Bonds.

**Note:** *Road* has the same meaning as in the *Roads Act 1993*.

**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

## C.9 Bicycle, Car and Commercial Parking Details

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Specific Works include:

- Widening the Garage door width to a minimum of 3.6m
- Adjustments to the vehicular access of No 40 Cambridge Street to ensure continued access to the property.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*. The existing footpath crossing grades and footpath levels at the road boundary must be maintained unless varied by an approval under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.

Standard Condition: C45 (Autotext CC45)

### C.10 Water Conservation

In accordance with Part 5.1.11 of the Paddington DCP, the *Construction Certificate* plans and specification, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail:

- a) Low-flow water regulators must be fitted to all new kitchen and bathroom taps
- b) Dual flush toilets must be installed within the development to reduce water consumption.
- c) Water saving showerheads must be fitted to all showers within the development to reduce water consumption and promote energy efficiency.

### E.16 Compliance with Council's Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

**Note:** A copy of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" can be downloaded free of charge from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)  
Standard Condition: E24

### E.17 Replacement of Sandstone Kerb or Gutter

Where existing sandstone kerb or gutter is to be replaced in concrete, the sandstone remains the property of Council. The stones are to be removed and handled in such a manner so as not to cause any damage to the sandstone.

The stones must be delivered on pallets between 7am to 4pm Monday to Friday by the *Principal Contractor* or *Owner* to:

Woollahra Council's Works Depot  
52-54 O'Dea Avenue  
Waterloo

Prior to delivery contact the Purchasing Officer, Mr Joe Cavagnino, on 9391 7973.  
Standard Condition: E25

### F.2 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed ("WAE") plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the BCA must include but not limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All stormwater drainage systems.
- d. Driveway, carparking and access in accordance with AS2890.1
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the BCA, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, Development Standards, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

### F.3 Commissioning and Certification of Public Infrastructure Works

The *principal contractor* or *owner builder* must submit, to the satisfaction of Woollahra Municipal Council, certification from a *professional engineer* that all public infrastructure works have been executed in compliance with this consent and with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The certification must be support by closed circuit television / video inspection provided on DVD of all stormwater drainage together with works as executed engineering plans and a survey report detailing all finished reduced levels.

Standard Condition: F9

### H.2 Road Works (including footpaths)

The following works must be completed to the satisfaction of Council, in compliance with Council’s “Specification for Roadworks, Drainage and Miscellaneous Works” dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor’s* or *owner’s* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. relocation of existing power/light pole

- f. relocation of street sign
- g. new or replacement street trees;
- h. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- i. new or reinstated kerb and guttering within the *road*; and
- j. new or reinstated road surface pavement within the *road*.

**Note:** Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council's customer service centre.

---

**D5 DA822/2007 – 42-44 Queen Street, Woollahra – Demolition of rear of existing building & erection of substantial mixed use addition with parking facilities & elevated terrace – 7/12/2007**

(Huxley/Martin)

**Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979**

THAT the Council, as the consent authority, grant development consent to Development Application No. 822/2007 for the demolition of the rear of the existing building and erection of a substantial mixed-use addition with parking facilities and elevated terrace on land at 42-44 Queen Street Woollahra, subject to the following conditions: -

**A. General Conditions**

**A.1 Approved Plans and supporting documents**

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp "Approved DA Plans" **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
2DA01 & 2DA02	Architectural Plans	Dods and Zuccon Architects	5 Mar 2008
173314M	BASIX Certificate	Department of Planning	5 Dec 2007
21246Z	Geotechnical Report	Jeffery And Katauskas P/L	22 Jun 2007
LP01-2907	Landscape Plan	William Dangar	Jan 2008
07393	Stormwater Management Plan	Robert Bird Group	29/11/2007
073370101 V.2	Traffic Report	Masson, Wilson and Twiney	20/11/2007

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

**A.2 Ancillary Aspect of the Development (s80A(2) of the Act)**

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

**Note:** This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.  
Standard Condition: A8

**B. Conditions which must be satisfied prior to the demolition of any building or construction**

**B.1 Establishment of Tree Protection Zones**

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

- a) Tree Protection Zone areas

Council Ref No	Species	Location	Radius from Trunk (metres)*
8	<i>Liquidamber styraciflua</i> Liquidambar	Council street tree	2.0m
9			

Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions.
- c) Trunk protection, to a maximum height permitted by the first branches, is to be installed around the trunks of the trees listed in the table below: -

Council Ref No	Species	Location
8	<i>Liquidamber styraciflua</i> Liquidambar	Council street tree
9		

A padding material eg. Hessian or thick carpet underlay, is to be wrapt around the trunk first. Harwood planks, 50x100mm and to the maximum possible length, are to be placed over the padding and around the trunk of the tree at 150mm centres. These planks are to be secured in place by 8 gauge wire at 300mm spacing.



- d) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- e) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- f) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- g) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

## **C. Conditions which must be satisfied prior to the issue of any construction certificate**

### **C.1 Modification of details of the development (s80A(1)(g) of the Act)**

The approved plans and Construction Certificate plans and specification, required to be submitted to the Certifying Authority pursuant to Clause 139 of the Regulation, must detail:

- a) The provision of a privacy screen, as depicted on the floor plan and with a minimum height of 1.7m, on the Eastern Elevation and Section B-B (Plan No. 2DA02 Issue B).
- b) A 0.3m increase in the depth (measured north-south) of the planter box along the rear (northern) edge of the terrace on Level 3.
- c) The establishment of a retractable clothes line within the rear terrace of Level 2.

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

### **C.2 Tree Management Details**

*The Construction Certificate plans and specifications required by clause 139 of the Regulation must, show the following information: -*

- a. trees to be numbered in accordance with these conditions,
- b. shaded green where required to be protected and retained,
- c. shaded yellow where required to be transplanted,
- d. shaded blue where required to be pruned,
- e. shaded red where authorised to be removed and,

- f. references to applicable tree management plan, Arborist's report, transplant method statement or bush regeneration management plan.

Standard Condition: C30

### C.3 Payment of Long Service Levy, Security, Development Levy and Fees

The certifying authority must not issue any Part 4A Certificate until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees prior to the issue of a construction certificate.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit</b> - making good damage caused to any property of the Council as a consequence of the doing of anything to which the consent relates	\$53,000	No	T600
<b>DEVELOPMENT LEVY</b> under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy	\$25,350 + Index Amount	Yes, quarterly	T94
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Public Road and Footpath Infrastructure Inspection Fee	\$363.25	No	T99
Security Administration Fee	\$168	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>	\$78881.25 plus any relevant indexed amounts and long service levy		

#### How must the payments be made?

Payments must be made by:

1. Cash deposit with Council,
2. Credit card payment with Council, or
3. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

**How will the section 94A levy be indexed?**

To ensure that the value of the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

**Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

**Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a) the reasons given;
- b) whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c) whether any prejudice will be caused to the efficacy and operation of this plan; and
- d) whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

**C.4 Road and Public Domain Works – Council approval required**

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*. Specific works include:

- full width vehicular crossings having a width of 9m in accordance with Council's standard drawing RF2
- the remainder of the width of the site is to be standard Kerb and Gutter with concrete path behind in accordance with Council's standard drawing RF3

- road pavement reconstruction for the full width of the property for a width of 1.8m in accordance with Council's standard drawing RF3

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

**Note:** *Road* has the same meaning as in the *Roads Act 1993*.

**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

## C.5 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with: -

- a. "*Do it Right On Site, Soil and Water Management for the Construction Industry*" published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. "*Managing Urban Stormwater - Soils and Construction*" published by the NSW Department of Housing 4th Edition" (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

**Note:** This condition has been imposed to eliminate potential water pollution and dust nuisance.

**Note:** The International Erosion Control Association – Australasia [http://www.austieca.com.au/](http://www.austieca.com.au) lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

**Note:** The "*Do it Right On Site, Soil and Water Management for the Construction Industry*" publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/>.

**Note:** Pursuant to clause 161(1)(a)(5) of the *Regulation an Accredited Certifier* may satisfied as to this matt  
Standard Condition: C25

## C.6 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation. Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

## C.7 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:
  - (i) will detect any settlement associated with temporary and permanent works and structures
  - (ii) will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like)
  - (iii) will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity)
  - (iv) will detect groundwater changes calibrated against natural groundwater variations
  - (v) details: -
    - the location and type of monitoring systems to be utilised;
    - the preset acceptable limits for peak particle velocity and ground water fluctuations;

- recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
- a contingency plan.  
Standard Condition: C40

### **C.8 Bicycle, Car and Commercial Parking Details**

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

A splay in the eastern corner is to be provided and is to comply with section C 5.4.8 of the Woollahra RDCP 2003.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.  
Standard Condition: C45

### **C.9 Stormwater management plan (Clause 25(2) WLEP 1995)**

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include a *Stormwater Management Plan* for the site. The *Stormwater Management Plan* must detail:

- a. General design in accordance with Stormwater disposal concept plan prepared by Robert Bird Group Engineers Dwg no. 07393 Rev 4 dated 29.11.2007 other than amended by this and other conditions;
- b. The discharge of stormwater, by direct connection, to Smith Street;
- c. Compliance the objectives and performance requirements of the BCA;
- d. Any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- e. General compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004)

The *Stormwater Management Plan* must include the following specific requirements:

#### **Layout plan**

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off*, 1987 edition or most current version thereof. It must include:

- all pipe layouts, dimensions, grades, lengths and material specification,
- all invert levels reduced to Australian Height Datum (AHD),
- location and dimensions of all drainage pits,
- point and method of connection to Councils drainage infrastructure.

**Subsoil Drainage - Subsoil drainage details, clean out points, discharge point.**

**Note:** This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

**C.10 BASIX commitments**

The *applicant* must submit to the *Certifying Authority* *BASIX Certificate* No. 173314M with any application for a *Construction Certificate*.

**Note:** Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

**Note:** Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"  
Standard Condition: C7

**C.11 Utility Services Generally**

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

**Note:** Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

**Note:** The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.

**Note:** This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest.  
Standard Condition: C20

## C.12 Acoustic Certification of Plant Room

The *Construction Certificate* plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must be accompanied by a certificate from a *professional engineer* (acoustic engineer) certifying that noise from the operation of the plant room will not exceed the background noise level when measured at any boundary of the site. Where sound attenuation is required this must be detailed.

**Note:** Further information including lists of Acoustic Engineers can be obtained from:

1. **Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au /index.php](http://www.acoustics.asn.au/index.php)).
2. **Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).  
Standard Condition: C62

## D. Conditions which must be satisfied prior to the commencement of any development work

### D.1 Dilapidation Reports for existing buildings

Dilapidation surveys must be conducted and dilapidation reports prepared by a professional engineer (structural) of all buildings on land whose title boundary abuts the site and of such further buildings located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration.

These properties must include (but is not limited to) 36-40 Queen Street and 46 Queen Street.

The dilapidation reports must be completed and submitted to Council with the Notice of Commencement prior to the commencement of any development work.

Where excavation of the site will extend below the level of any immediately adjoining building the principal contractor or owner builder must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the notice of commencement required by s81A(2) of the Act not less than two (2) days prior to the commencement of any work.

Standard Condition: D4



## D.2 Work (Construction) Zone – Approval and Implementation

A work zone is required for this development. The *principal contractor* or *owner* must apply for, obtained approval for, pay all fees for and implemented the required work zone before commencement of any work.

The *principal contractor* must pay all fees associated with the application and occupation and use of the road as a work zone. All Work Zone signs must have been erected by Council to permit enforcement of the work zone by Rangers and Police before commencement of any work. Signs are not erected until full payment of work zone fees.

**Note:** The *principal contractor* or *owner* must allow not less than four weeks (for routine applications) from the date of making an application to the Traffic Committee (Woollahra Local Traffic Committee) constituted under the Clause 22 of the *Transport Administration (General) Regulation 2000* to exercise those functions delegated by the Roads and Traffic Authority under Section 50 of the *Transport Administration Act 1988*.

**Note:** The enforcement of the work zone is at the discretion of Council's Rangers and the NSW Police Service. The principal contractor must report any breach of the work zone to either Council or the NSW Police Service.  
Standard Condition: D10

## D.3 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (“The Blue Book”).

Where there is any conflict The Blue Book takes precedence.

**Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

**Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

**Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”  
**Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.  
Standard Condition: D14

**D.4 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:


- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4), or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.


**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

**D.5 Security Fencing, Hoarding and Overhead Protection**

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

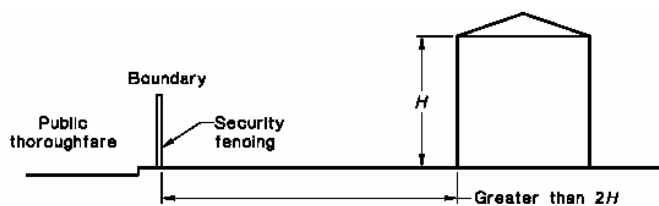

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

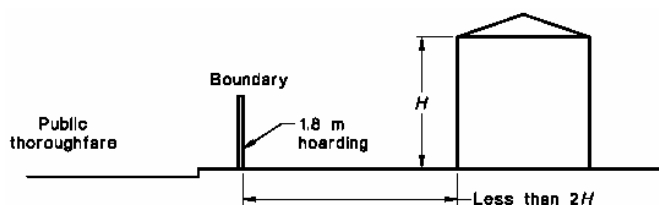


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- a. the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- b. the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- a. extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- b. have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- c. together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

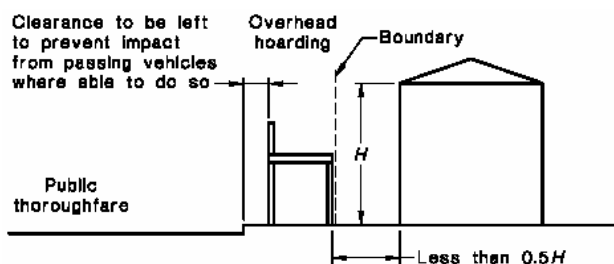

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstruucts.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

**Note:** The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.  
Standard Condition: D11

## D.6 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State’s building laws.”

**Note:** *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

## D.7 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

***accredited sewage management facility*** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

***approved by the council*** means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

***public sewer*** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

***sewage management facility*** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**Note:** This condition does not set aside the requirement to comply with Workcover NSW requirements.  
Standard Condition: D13

#### **D.8 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.  
Standard Condition: D15

#### **D.9 Notification of Home Building Act 1989 requirements**

- a. For the purposes of section 80A (11) of the *Act*, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
  - i. in the case of work for which a *principal contractor* is required to be appointed:
    - the name and licence number of the principal contractor, and
    - the name of the insurer by which the work is insured under Part 6 of that *Act*,
  - ii. in the case of work to be done by an owner-builder:
    - the name of the owner-builder, and
    - if the owner-builder is required to hold an owner-builder permit under that *Act*, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State's building laws.  
Standard Condition: D17

#### **D.10 Establishment of boundary location, building location and datum**

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;

- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

**Note:** Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

**Note:** On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.  
Standard Condition: D18

## **E. Conditions which must be satisfied during any development work**

### **E.1 Tree Preservation**

All persons must comply with Council's *Tree Preservation Order* ("the TPO"), other than where varied by this consent. The order applies to any tree, with a height greater than 5 metres or a diameter spread of branches greater than 3 metres, is subject to Council's Tree Preservation Order unless, exempted by specific provisions. Works to be carried out within a 5 metre radius of any tree, subject to the Tree Preservation Order, require the prior written consent of Council.

#### *General Protection Requirements:*

- a) There must be no excavation or *work* within the required Tree Protection Zone(s). The Tree Protection Zone(s) must be maintained during all *development work*.
- b) Where excavation encounters tree roots with a diameter exceeding 40mm excavation must cease. The *principal contractor* must procure an inspection of the tree roots exposed by a qualified arborist. Excavation must only recommence with the implementation of the recommendations of the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.
- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.

**Note:** Trees must be pruned in accordance with Australian Standard AS 4373 – 2007 "Pruning of Amenity Trees" and Workcover NSW Code of Practice Amenity Tree Industry 1998.  
Standard Condition: E8

### **E.2 Tree Preservation & Approved Landscaping Works**

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- The following trees must be retained

Council Ref No	Species	Location	Dimension (metres)	Tree Value
8	<i>Liquidamber styraciflua</i>	Council street tree	9 x 7	
9	Liquidambar			

**Note:** The tree trees required to be retained should appear coloured green on the construction certificate plans.

- The following trees may be removed

Council Ref No	Species	Location	Dimension (Metres)
1	<i>Archontophoenix cunninghamiana</i>	Rear yard of property	7 x 4m
2	Bangalow Palm		8 x 4m
3	<i>Celtis australis</i> Hackberry		10 x 4m
5	<i>Livistonia chinensis</i> Chinese Fan Palm		7 x 5m

**Note:** The tree trees that may be removed should appear coloured red on the construction certificate plans.

### E.3 Replacement trees which must be planted

The following compensatory replacement plantings must be planted to ensure the preservation of the landscape character of the area.

Species/Type	Planting Location	Container Size or Size of Tree (at time of planting)	Min Dimensions at Maturity
4 x <i>Howea forsteriana</i> Kentia Palms	In accordance with the submitted William Dangar landscape plan dated January 2008	1000 Litre	Natural height

### E.4 Compliance with Construction Management Plan

All development activities and traffic movements must be carried out in accordance with the approved construction management plan.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

**Note:** Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.  
Standard Condition: E3

### E.5 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- Not use the road or footway for the storage of any article, material, matter, waste or thing.



- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## E.6 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) erosion and sediment controls
- b) dust controls
- c) dewatering discharges
- d) noise controls
- e) vibration monitoring and controls
- f) ablutions

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## **E.7 Compliance with Geotechnical/Hydrogeological Monitoring Program**

Excavation must be undertaken in accordance with the recommendations of the Geotechnical /Hydrogeological Monitoring Program and any oral or written direction of the supervising professional engineer.

The principal contractor and any sub-contractor must strictly follow the Geotechnical / Hydrogeological Monitoring Program for the development including, but not limited to: -

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

**Note:** The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.

Standard Condition: E12

## **E.8 Vibration Monitoring**

Vibration monitoring equipment must be installed and maintained, under the supervision of a *professional engineer* with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the *professional engineer* as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity an audible alarm must activate such that the *principal contractor* and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately. Prior to the vibration monitoring equipment being reset by the *professional engineer* and any further work recommencing the event must be recorded and the cause of the event identified and documented by the *professional engineer*.

Where the event requires, in the opinion of the *professional engineer*, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the *professional engineer* to the *principal contractor* and any sub-contractor clearly setting out required work practice.

The *principal contractor* and any sub-contractor must comply with all work directions, verbal or written, given by the *professional engineer*.

A copy of any written direction required by this condition must be provided to the *Principal Certifying Authority* within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the *professional engineer, principal contractor* and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the *professional engineer* to prevent any further damage and restore support to the *supported land*.

**Note:** *Professional engineer* has the same mean as in Clause A1.1 of the BCA.

**Note:** *Building* has the same meaning as in section 4 of the Act i.e. “**building** includes part of a building and any structure or part of a structure”.

**Note:** *Supported land* has the same meaning as in section 88K of the Conveyancing Act 1919.  
Standard Condition: E14

## E.9 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

## E.10 Disposal of site water during construction

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system, that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act* 1993;

- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act 1997*, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

**Note:** This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.

Standard Condition: E17

### **E.11 Compliance with Council's Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway**

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

**Note:** A copy of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" can be downloaded free of charge from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)

Standard Condition: E24

### **E.12 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

### E.13 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

### E.14 Requirement to notify about new evidence

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

### E.15 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any PCA Service Agreement.

**Note:** The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

**Note:** The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

### E.16 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piling, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

- Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.
- Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.
- Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.
- Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.
- Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.
- Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

### E.17 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

### E.18 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions;

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

### E.19 Support of adjoining land and buildings

A person must not to do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

**Note:** This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

**Note:** Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the *Roads Act 1993* for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

**Note:** The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council’s care control or management, or any community or operational land as defined by the *Local Government Act 1993*.  
Standard Condition: E13

## E.20 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

## E.21 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23



## **F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

### **F.1 Amenity Landscaping**

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site.

**Note:** This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.  
Standard Condition: F6

### **F.2 Commissioning and Certification of Systems and Works**

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work
- b. all flood protection measures
- c. all garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. all stormwater drainage systems
- e. all mechanical ventilation systems
- f. all hydraulic systems
- g. all structural work
- h. all acoustic attenuation work
- i. all waterproofing
- j. such further matters as the *Principal Certifying Authority* may require

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, *Development Standards*, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

### **F.3 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building.  
Standard Condition: F1

### **F.4 Letter Box(es)**

All letter boxes must be constructed and located in accordance with AS/NZS 4253:1994 Mailboxes and to Australia Post's satisfaction.

**Note:** This condition has been imposed to ensure that mail can be delivered to occupiers of the site.  
Standard Condition: F12

### **G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

Nil.

### **H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

#### **H.1 Landscaping**

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan, arborist report, transplant method statement and tree management plan. The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

**Note:** This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H9

#### **H.2 Road Works (including footpaths)**

The following works must be completed to the satisfaction of Council, in compliance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor's* or *owner's* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. new or replacement street trees;
- f. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.

- g. new or reinstated kerb and guttering within the *road*; and
- h. new or reinstated road surface pavement within the *road*.

**Note:** Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council’s website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s customer service centre.  
Standard Condition: H13

**H.3 Fulfillment of BASIX commitments – Clause 154B of the Regulation**

All BASIX commitments must be effected in accordance with the BASIX Certificate No. 173314M.

**Note:** Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled."  
Standard Condition: H7

**I. Conditions which must be satisfied during the ongoing use of the development**

**I.1 Maintenance of Landscaping**

All landscaping must be maintained in general accordance with this consent.

This condition does not prohibit the planting of additional trees or shrubs subject that they are native species endemic to the immediate locality.

**Reason:** This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

**Note:** This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled “Local Native Plants for Sydney’s Eastern Suburbs” published by Woollahra, Waverley, Randwick and Botany Bay Councils.  
Standard Condition: I8

**I.2 Provision of off-street Public**

The owner and occupier, in compliance with AS/NZS 2890.1:2004: Parking facilities - Off-street car parking, must maintain unimpeded access to off-street parking as follows:

Use	Number of required public spaces
Retail/commercial staff parking	2 spaces within car stacker
Residential	2 spaces within car stacker
Retail customer	Accessible space

This condition has been imposed to ensure adequate on site parking is maintained.  
Standard Condition: I4

### I.3 Maintenance of BASIX commitments

All BASIX commitments must be maintained in accordance with the BASIX Certificate No. 173314M

**Note:** This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.  
Standard Condition: 17

### I.4 Outdoor lighting – Roof Terraces

Outdoor lighting must comply with AS 4282-1997: *Control of the obtrusive effects of outdoor lighting*. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.

All lighting to be installed on the roof terrace will be recessed lights or will be surface wall/balustrade mounted lights at a maximum height of 600 mm above the finished floor level of the roof terrace.

This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting.

**Note:** Council may consider, subject to an appropriate section 96 application relaxation of this condition where it can be demonstrated, by expert report, that the level of lighting in the existing area already exceeds the above criteria, where physical shielding is present or physical shielding is reasonably possible.  
Standard Condition: 144

### I.5 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

**Useful links:**

**Community Justice Centres**—free mediation service provided by the NSW Government ([www.cjc.nsw.gov.au](http://www.cjc.nsw.gov.au)).

**Department of Environment and Conservation NSW**, Noise Policy Section web page ([www.environment.nsw.gov.au/noise](http://www.environment.nsw.gov.au/noise)).

**New South Wales Government Legislation** home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* ([www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)).

**Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au/index.php](http://www.acoustics.asn.au/index.php)).

**Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).

**Department of Gaming and Racing** - ([www.dgr.nsw.gov.au](http://www.dgr.nsw.gov.au)).

Standard Condition: 150

## I.6 Noise from plant room

Noise from the operation of plant room must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Words in this condition have the same meaning as in the:  
*NSW Industrial Noise Policy* ([http://www.environment.nsw.gov.au/resources/ind\\_noise.pdf](http://www.environment.nsw.gov.au/resources/ind_noise.pdf))  
ISBN 0 7313 2715 2, dated January 2000, and  
*Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>)  
ISBN 1741370671, dated December 2004.  
Standard Condition: I53

## J. Miscellaneous Conditions

Nil.

## K. Advisings

### K.1 Pruning or Removing a Tree Growing on Private Property

Woollahra Municipal Council's *Tree Preservation Order* 2006 (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

### K.2 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

#### Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

### Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order. This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).  
Standard Advising: K1

### K.3 Dial before you dig



The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

### K.4 NSW Police Service and Road Closures

The Rose Bay Local Area Command closely aligns with the boundaries of the Woollahra local government area.

Council and Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Traffic Sergeant, Paddington Police Station, 16 Jersey Road, Paddington. Phone No. 02 8356 8299 or Fax No. 0283568211.

**Warning:** If you partially or fully close a road without compliance with Council and Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution.

Standard Advising: K4

### K.5 Commonwealth Disability Discrimination Act 1992 (“DDA”)

The Disability Discrimination Act 1992 (DDA) makes it against the law for public places to be inaccessible to people with a disability. Compliance with this development consent, Council's Access DCP and the BCA does not necessarily satisfy compliance with the DDA.

The DDA applies to existing places as well as places under construction. Existing places must be modified and be accessible (except where this would involve "unjustifiable hardship").

Further detailed advice can be obtained from the Human Rights and Equal Opportunity Commission ("HEROC"):

- <http://www.hreoc.gov.au/index.html>
- [http://www.hreoc.gov.au/disability\\_rights/dda\\_guide/ins/ins.html](http://www.hreoc.gov.au/disability_rights/dda_guide/ins/ins.html)

If you have any further questions relating to the application of the DDA you can send an email to HEROC at [disabdis@humanrights.gov.au](mailto:disabdis@humanrights.gov.au).

Standard Advising: K3

## K.6 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

## K.7 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124. The Guide can be downloaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

## K.8 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW's website: <http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office: Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145. Standard Condition: K7

## K.9 Asbestos Removal, Repair or Disturbance

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

**Note:** The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) or one of Workcover NSW's offices for further advice. Standard Advising: K8

## K.10 Lead Paint

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1-1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2-1998, Guide to Lead Paint Management—Residential and Commercial Buildings.

Industrial paints may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.



Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

Standard Advising: K9

### **K.11 Appeal**

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact Simon Taylor, Senior Assessment Officer on (02) 9391 7162. However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

### **K.12 Release of Security**

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*. The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be. Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>

Standard Condition: K15

### **K.13 Recycling of Demolition and Building Material**

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

**K.14 Model**

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

Standard Condition: K21 (Autotext KK21)

---

**D6 DA103/2008 – 6 Buckhurst Avenue, Point Piper – Substantial alterations & additions to existing residential flat building including demolition works, new basement level with swimming pool, infilling part of the void between existing residential flat building & car park, new boat store, new balconies, internal reconfigurations & landscape works – 3/3/2008**

**Note:** Late correspondence was tabled by Elk Developments P/L, Lewis Adey , Lexia Wilson, Bron McKillop, Tony Moody and Anthony Betros.

**Note:** Bron McKillop of Point Piper, Tony Moody on behalf of Deborah Hazan of Point Piper, Anthony Betros ABC Planning on behalf of the owners of Strata Plan 18128, David Roseman of Point Piper, objectors and George Karavanas GSA Planning and Peter El Khouri the applicant addressed the Committee.

**Note:** The Committee amended Condition C.1 (Modification of details of the development (s80A(1)(g) of the Act), added Condition C.19 (Acoustic treatment to roof terraces) amended Condition E.4 (Compliance with Construction Management Plan) and amended Condition I.3 (Maintenance of Landscaping).

**Motion moved by Councillor Martin  
Seconded by Councillor Huxley**

THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 103/2008 is consistent with the aims of the Policy, grant development consent to DA No. 103/2008 for substantial alterations and additions to the existing residential flat building including demolition works, a new basement level with swimming pool, infilling part of the void between the existing residential flat building and car park, a new boat store, new balconies, internal reconfigurations and landscape works on land at 6 Buckhurst Avenue Point Piper, subject to the conditions in the report with the following amendments:

- Amend Condition C.1 (j) by deleting the words “2.0m” and replacing with “1.0m” and delete the words “6 Buckhurst Avenue” and replace with the words “7 Buckhurst Avenue”.
- Amend Condition C.1 (j) by adding a third sentence as follows:  
“The required single hardstand car space shall not be covered by a roof, walls, garage or any other structure and shall remain open at all times”.
- Amend Condition I.3 by deletion of those parts of the condition following the first paragraph.
- Deletion of Condition C.1 (f).
- No part of the proposed cladding on the eastern wall of bedroom 4 to unit 7 shall extend beyond the northern face of bedroom 4.
- Acoustic material to be used to studio balconies on the north-eastern aspect
- Deliveries be limited to 7am to 3pm (during the school term) and 8am to 12noon on Saturdays.
- Ensure a traffic controller is managing traffic in Buckhurst Avenue at all times.

**Amendment moved by Councillor Shoebridge  
Seconded by Councillor Gardner**

That the following additional amendments be included as part of the recommendation moved by Councillor Martin and seconded by Councillor Huxley:

1. That the double garage at the rear of the property be deleted.
2. That no part of the north-western aspect is to exceed the current built form so as to negative any views.

**The parts of the Amendment were put separately.**

**Part 1 of the Amendment was carried and became part of the motion.**

**Part 2 of the Amendment was lost.**

**Further Amendment moved by Councillor Gardner**

That the following additional amendments be included as part of the recommendation:

1. That Condition E.2 shall be amended by deletion of the reference to “Celtis. Sp. Hackberry (council reference 6, 7, 8) with the objective of requiring the removal of said Hackberry trees as a condition of consent to be incorporated in the construction certificate plans.
2. The imposition of a new condition C.1 (1) as follows:  
“the removal of the cypress hedge on the northern boundary of 6 Buckhurst Avenue and its replacement with a new hedge of non-invasive bamboo (Bambusia Tertilis Gravilis)”

**The parts of the Amendment were put separately.**

**Part 1 of the Amendment was lost.**

**Part 2 of the Amendment was carried and became part of the motion.**

**The Motion before the Committee now stands at:**

THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 103/2008 is consistent with the aims of the Policy, grant development consent to DA No. 103/2008 for substantial alterations and additions to the existing residential flat building including demolition works, a new basement level with swimming pool, infilling part of the void between the existing residential flat building and car park, a new boat store, new balconies, internal reconfigurations and landscape works on land at 6 Buckhurst Avenue Point Piper, subject to the conditions in the report with the following amendments:

- Amend Condition C.1 (j) by deleting the words “2.0m” and replacing with “1.0m” and delete the words “6 Buckhurst Avenue” and replace with the words “7 Buckhurst Avenue”.
- Amend Condition C.1 (j) by adding a third sentence as follows:  
“The required single hardstand car space shall not be covered by a roof, walls, garage or any other structure and shall remain open at all times”.
- Amend Condition I.3 by deletion of those parts of the condition following the first paragraph.
- Deletion of Condition C.1 (f).
- No part of the proposed cladding on the eastern wall of bedroom 4 to unit 7 shall extend beyond the northern face of bedroom 4.
- Acoustic material to be used to studio balconies on the north-eastern aspect

- Deliveries be limited to 7am to 3pm (during the school term) and 8am to 12noon on Saturdays.
- Ensure a traffic controller is managing traffic in Buckhurst Avenue at all times.
- That the double garage at the rear of the property be deleted.
- The imposition of a new condition C.1 (1) as follows:  
“the removal of the cypress hedge on the northern boundary of 6 Buckhurst Avenue and its replacement with a new hedge of non-invasive bamboo (Bambusia Tertilis Gravalis)”
- All other trees on the site are to be retained.

**The Motion was put and carried.**

**(Martin/Huxley)**

**Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979**

THAT the Council, as the consent authority, is of the opinion that the objection under State Environmental Planning Policy No. 1 – Development Standards to the 30.0m foreshore building line development standard under Clause 22 of Woollahra LEP 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the kayak store is located underground and does not pose any amenity impacts to adjoining properties, any impression of scale as viewed from Sydney Harbour or impact upon the natural foreshore and ecology of the Harbour.

**AND**

THAT the Council, as the consent authority, is of the opinion that the objection under State Environmental Planning Policy No. 1 – Development Standards to the maximum building height development standard under Clause 12 of Woollahra LEP 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the appearance of the building as viewed from Sydney Harbour remains appropriate and there are no unreasonable impacts upon the amenity of adjoining properties.

**AND**

THAT the Council, as the consent authority, is of the opinion that the objection under State Environmental Planning Policy No. 1 – Development Standards to the maximum floor space ratio development standard under Clause 11 of Woollahra LEP 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the scale of the building as viewed from Sydney Harbour remains appropriate and there are no unreasonable impacts upon the amenity of adjoining properties.

**AND**

THAT the Council, as the consent authority, is of the opinion that the objection under State Environmental Planning Policy No. 1 – Development Standards to the minimum site frontage development standard under Clause 10(2) of Woollahra LEP 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the proposed alterations and additions are minor relative to the scale of the building and the density of the subject site remains appropriate.

**AND**

THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 103/2008 is consistent with the aims of the Policy, grant development consent to DA No. 103/2008 for substantial alterations and additions to the existing residential flat building including demolition works, a new basement level with swimming pool, infilling part of the void between the existing residential flat building and car park, a new boat store, new balconies, internal reconfigurations and landscape works on land at 6 Buckhurst Avenue Point Piper, subject to the following conditions:

## A. General Conditions

### A.1 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp "Approved DA Plans" unless modified by any following condition. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
2006594.4/1501A/R1/GW	Acoustic Report	Acoustic Logic Consultancy	23 Jan 2008
0315-DA.101, 0315-DA.201, 0315-DA.202, 0315-DA.202, 0315-DA.203, 0315-DA.204, 0315-DA.205, 0315-DA.206, 0315-DA.207, 0315-DA.208, 0315-DA.301,	Architectural Plans	Alex Poppv and Associates Pty Ltd	8 July 2008
0315-DA.302, 0315-DA.304, 0315-DA.310, 0315-DA.311,			27 Feb 2008
0315-DA.303,			26 Feb 2008
A28212S, A28197, A28198, A28211, A28196, A28212, A28195, A28213, A28194, A28278, A28193, A28214, A28192			BASIX Certificates
071621	Construction Management Plan	George El Khouri Architects	16 Jan 2008
08002	Flooding Study	AKY Civil Engineering	Feb 2008
S07130-A	Geotechnical Report	Brink and Associates	30 Nov 2007
S07130-A	Hydrogeological Report	Brink and Associates	30 Nov 2007
L-01	Landscape Plan	Anton James Design	25 Feb 2008
	Arboricultural Assessment Report	Urban Tree Management	11 Jan 2008
0315	Sample Boards	Alex Poppv and Associates PL	Undated
07162	Statement of Heritage Impact	GSA Planning	Feb 2008
H-DA-01, H-DA-02	Stormwater Management Plan	ITM Design	26 Feb 2008
07162	Traffic Report	GSA Planning	Feb 2008
071882	Waste Management Plan	George El Khouri Architects	16 Jan 2008

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

## A.2 Ancillary Aspect of the Development (s80A(2) of the Act)

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

**Note:** This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.  
Standard Condition: A8

## A.3 General Terms of Approval – Water Management Act 2000 (Department of Water and Energy)

The following general terms of approval have been imposed by the Department of Water and Energy:

- a) These General Terms of Approval (GTA) only apply to the controlled activities described in the plans and associated documentation relating to DA103/2008/1 and provided by Council. Any amendments or modifications to the proposed controlled activities may render these GTA invalid. If the proposed controlled activities are amended or modified the Department of Water & Energy must be notified to determine if any variations to these GTA will be required.
- b) Prior to the commencement of any controlled activity (works) on waterfront land, the consent holder must obtain a Controlled Activity Approval (CAA) under the Water Management Act from the Department of Water & Energy. Waterfront land for the purposes of this DA is land and material in or within 40 metres of the top of the bank or shore of the estuary identified.
- c) The consent holder must (i) carry out any controlled activity in accordance with approved plans and (ii) construct and/or implement any controlled activity by or under the direct supervision of a suitably qualified professional and (iii) when required, provide a certificate of completion to the Department of Water & Energy.
- d) The consent holder must ensure that no materials or cleared vegetation that may obstruct flow, wash into the water body or cause damage to river banks are left on waterfront land other than in accordance with a plan approved by the Department of Water & Energy.
- e) The consent holder must establish all erosion and sediment control works and water diversion structures in accordance with a plan approved by the Department of Water & Energy. These works and structures must be inspected and maintained throughout the working period and must not be removed until the site has been fully stabilised.
- f) The consent holder must ensure that no excavation is undertaken on waterfront land other than in accordance with a plan approved by the Department of Water & Energy.

- g) The consent holder must ensure that any excavation does not result in (i) diversion of any estuary (ii) bed or bank instability or (iii) damage to native vegetation within the area where a controlled activity has been authorised, other than in accordance with a plan approved by the Department of Water & Energy.

**Note:** These conditions have not been imposed by Council but are required to be incorporate as conditions of development consent. Where there is any inconsistency between these general terms of approval and other conditions of this consent the more onerous requirement prevails.

Standard Condition: A17

**B. Conditions which must be satisfied prior to the demolition of any building or construction**

**B.1 Construction Certificate required prior to any demolition**

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

**Note:** See Over our Dead Body Society Inc v Byron Bay Community Association Inc [2001] NSWLEC 125.  
Standard Condition: B1

**B.2 Establishment of Tree Protection Zones**

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

- (a) Tree Protection Zone areas

Council Ref No	Species	Location	Radius from Trunk (metres)*
1	<i>Erythrina sykesii</i> Coral Tree	South Western Boundary	4.0m
2			
3	<i>Jacaranda mimosifolia</i> Jacaranda	Northern Boundary	5.0m
4	<i>Lophostemon confertus</i> Brushbox		4.0m
5	<i>Brachychiton acerifolius</i> Illawara Flame Tree		3.0m

**\*NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- (b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- (c) Trunk protection, to a maximum height permitted by the first branches, is to be installed around the trunks of the trees listed in the table below

Council Ref No	Species	Location
1	<i>Erythrina sykesii</i> Coral Tree	South Western Boundary
2		
3	<i>Jacaranda mimosifolia</i> Jacaranda	Northern Boundary
4	<i>Lophostemon confertus</i> Brushbox	
5	<i>Brachychiton acerifolius</i> Illawara Flame Tree	

A padding material e.g. Hessian or thick carpet underlay is to be wrapped around the trunk first. Harwood planks, 50x100mm and to the maximum possible length, are to be placed over the padding and around the trunk of the tree at 150mm centres. These planks are to be secured in place by 8 gauge wire at 300mm spacing.

- (d) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- (e) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (e.g. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- (f) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- (g) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

## C. Conditions which must be satisfied prior to the issue of any construction certificate

### C.1 Modification of details of the development (s80A(1)(g) of the Act)

The *approved plans* and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to Clause 139 of the *Regulation*, must detail:

The *approved plans* and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to Clause 139 of the *Regulation*, must detail:

- a) provision for a minimum of 8m<sup>3</sup> of separate and secure storage space for each unit
- b) the height of the main or upper vehicular entrance gate as limited to a maximum height of 2.1m
- c) the continuation of the raised planter bed/retaining wall in front of the basement level to the northern boundary
- d) the establishment of the main unit on the ground floor as 'fully accessible' and the provision of one disabled space within the ground level of the car park in accordance with the Woollahra Access DCP
- e) the provision of one car wash bay within the car park which is graded to an internal drainage point and connected to a Sydney Water Corporation sewer



- f) no other structures on the roof such as antennas, exhaust, aerials or any other structure other than those structures indicated on the approved plans
- g) the colours and materials of the roof being of a dull, non-reflective nature
- h) a 375mm reduction in the lift overrun
- i) the deletion of the garage for Unit 7 on the fifth level and its replacement with two hardstand car spaces, not closer than 3.0m from the eastern boundary and with a 1.2m high masonry wall along the eastern edge to reduce headlight glare. The required setback shall be landscaped and such landscaping shall have a maximum height, at maturity, of 1.0m in order to preserve the views of 7 Buckhurst Avenue. The required hardstand car spaces shall not be covered by a roof, walls, garage or any other structure and shall remain open at all times.
- j) the removal of *Celtis.sp* (Hackberry) trees in the north eastern corner of the property and which are under a height of 10.0m
- k) the removal of the cypress hedge on the northern boundary of 6 Buckhurst Avenue and its replacement with a new hedge of non-invasive bamboo (*Bambusia Tevtilis Gravilis*)
- l) no part of the proposed cladding on the eastern wall of bedroom 4 to unit 7 on the fifth level extending beyond the northern face of bedroom 4

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

## C.2 Payment of Long Service Levy, Security, Development Levy and Fees

The certifying authority must not issue any Part 4A Certificate until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees prior to the issue of a construction certificate.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b>			
under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> <a href="http://www.lspc.nsw.gov.au/levy_information/?levyi_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levyi_information/levy_calculator.stm</a>	Contact LSL Corporation	No	
<b>SECURITY</b>			
under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit</b> - making good damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates	\$233,900	No	T600
<b>DEVELOPMENT LEVY</b>			
under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy	\$115,954 + Index Amount	Yes, quarterly	T94

<b>INSPECTION FEES</b>			
under section 608 of the Local Government Act 1993			
Security Administration Fee	\$168	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$350,022 plus any relevant indexed amounts and long service levy		

**How must the payments be made?**

Payments must be made by:

1. Cash deposit with Council,
2. Credit card payment with Council, or
3. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

**How will the section 94A levy be indexed?**

To ensure that the value of the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

**Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

**Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a) the reasons given;
- b) whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c) whether any prejudice will be caused to the efficacy and operation of this plan; and
- d) whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;

- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

### C.3 BASIX commitments

The *applicant* must submit the following *Certifying Authority BASIX Certificates* with any application for a *Construction Certificate*; -

- Certificate No. A28212S for the swimming pool within the front yard
- Certificate No. A28197 for Unit 1 on the ground floor level
- Certificate No. A28198 for Unit 2 on the ground floor level
- Certificate No. A28211 for Unit 3 on the first floor level
- Certificate No. A28196 for Unit 4 on the first floor level
- Certificate No. A28212 for Unit 5 on the second floor level
- Certificate No. A28195 for Unit 6 on the second floor level
- Certificate No. A28213 for Unit 7 on the third floor level
- Certificate No. A28194 for Unit 8 on the third floor level
- Certificate No. A28278 for Unit 9 on the fourth floor level
- Certificate No. A28193 for Unit 10 on the fourth floor level
- Certificate No. A28214 for Unit 11 on the fifth floor level
- Certificate No. A28192 for Unit 12 on the fifth floor level

**Note:** Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

**Note:** Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"  
Standard Condition: C7

### C.4 State Environmental Planning Policy 65 – Design Verification Statement

Pursuant to clause 143A of the *Regulation* a *Certifying Authority* must not issue a *Construction Certificate* for residential flat development unless the *certifying authority* has received a *design verification statement* from a *qualified designer*, being a statement in which the *qualified designer* verifies that the plans and specifications achieve or improve the design quality of the development for which development consent was granted, having regard to the design quality principles set out in Part 2 of *State Environmental Planning Policy No 65— Design Quality of Residential Flat Development*.

**Note:** Although a certifying authority may pursuant to clause 161(2) of the Regulation be satisfied to any matter that relates to the external finish of a building the specific provisions of clause 143A of the Regulation overrides the Certifying Authority's powers under clause 161(2). No certifying authority can set aside this requirement.

**Note:** **Qualified designer** means a person **registered** as an **architect** in accordance with the Architects Act 2003. There are several methods of verifying the status of an individual or corporation or firm offering architectural services.  
ask the individual for their four digit NSW Architects Registration Number,  
ask a corporation or firm for the name and registration number of their "nominated architect",  
check to see whether an individual is listed on the NSW Register of Architects or the corporation or firm is listed on the List of architect corporations and firms on the Board's website  
[www.architects.nsw.gov.au](http://www.architects.nsw.gov.au), contact the Architects Board's staff to check the status of an individual or corporation or firm.  
Standard Condition: C11

### C.5 Waste Storage

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications must make provision for:

- a. the storage of waste and recycling bins behind the building line or within non-habitable areas of the building as close as possible to the service road collection point,
- b. a path for wheeling bins between the waste and recycling storage area and the collection point free of steps and kerbs and having a maximum grade of 1:8.

Standard Condition: C17

### C.6 Utility Services Generally

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

**Note:** Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

**Note:** The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.

**Note:** This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest.  
Standard Condition: C20

### C.7 Soil and Water Management Plan – Submission & Approval

The *principal contractor or owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

**Note:** This condition has been imposed to eliminate potential water pollution and dust nuisance.

**Note:** The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

**Note:** The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/> .

**Note:** Pursuant to clause 161(1)(a)(5) of the *Regulation* an *Accredited Certifier* may satisfied as to this ma  
Standard Condition: C25

### C.8 Tree Management Details

The *Construction Certificate* plans and specifications required by Clause 139 of the *Regulation* must, show the following information: -

- a. trees to be numbered in accordance with these conditions,
- b. shaded green where required to be protected and retained,
- c. shaded yellow where required to be transplanted,
- d. shaded blue where required to be pruned,
- e. shaded red where authorised to be removed and,
- f. references to applicable tree management plan, arborists report, transplant method statement or bush regeneration management plan.

Standard Condition: C30

### C.9 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

**Note:** This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.  
Standard Condition: C35

### C.10 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

### C.11 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:

- i. Will detect any settlement associated with temporary and permanent works and structures;
- ii. Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
- iii. Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);
- iv. Will detect groundwater changes calibrated against natural groundwater variations
- v. details:
  - the location and type of monitoring systems to be utilised;
  - the preset acceptable limits for peak particle velocity and ground water fluctuations;
  - recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
  - a contingency plan.

Standard Condition: C40

### **C.12 Bicycle, Car and Commercial Parking Details**

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively. Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.

Standard Condition: C45

### **C.13 Stormwater Discharge to Harbour (Clause 25(2) WLEP 1995)**

The developer must obtain written approval from the NSW Maritime Authority to discharge stormwater from the subject property directly into Sydney Harbour.

Standard Condition: C50

### **C.14 Stormwater management plan Clause 25(2) WLEP 1995)**

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include a *Stormwater Management Plan* for the site.

The *Stormwater Management Plan* must detail:

- a. general design in accordance with drawing No H-DA-01, 02, Revision C, dated 26 February 2008 and drawn by ITM Design Pty Ltd other than amended by this and other conditions
- b. the discharge of stormwater, by direct connection, to Sydney Harbour
- c. compliance the objectives and performance requirements of the BCA
- d. any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*

- e. general compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004)

The *Stormwater Management Plan* must include the following specific requirements:

Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off*, 1987 edition or most current version thereof.

It must include:

- all pipe layouts, dimensions, grades, lengths and material specification
- location of On-Site Detention
- all invert levels reduced to Australian Height Datum (AHD)
- location and dimensions of all drainage pits
- point and method of connection to Councils drainage infrastructure
- overland flow paths over impervious areas

Copies of certificates of title, showing the creation of private easements to drain water by gravity, if required

Subsoil Drainage - Subsoil drainage details, clean out points, discharge point

**Note:** This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

Standard Condition: C51

## C.15 Flood protection

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include a Flood Risk Management Plan on the basis of a 1:100 year flood established in the: -

- Flood Study by AKY Civil Engineering, dated February 2008 (Job No 08002)
- flood protection works on the various levels, as identified in Paragraphs 9.1, 9.2 and 9.3 of the above report

Note:

- a. Habitable floor levels not less than 300mm above the flood level.
- b. Non-habitable floor levels not less than 150mm above flood level.
- c. Driveway crest not less than 150mm above flood level before descending into the site (as applicable) and associated training walls to prevent entry of water.

**Note:** The revised driveway profile, gradients and transitions must be in accordance with Australian Standard 2890.1 – 2004, Part 1 (Off-street car parking). The driveway profile submitted to Council must contain all relevant details: reduced levels, proposed grades and distances. Council will not allow alteration to existing reduced levels within the road or any other public place to achieve flood protection.

Standard Condition: C54



### C.16 Swimming and Spa Pools – Child Resistant Barriers

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation* must demonstrate compliance (by showing the proposed location of all child-resistant barriers and the resuscitation sign) with the provisions of the *Swimming Pools Act 1992*.

**Note:** A statement to the effect that isolation swimming pool fencing complying with AS1926 will be installed does not satisfy this condition. The location of the required barriers and the sign must be detailed upon the *Construction Certificate* plans.  
Standard Condition: C55

### C.17 Sound Attenuation of the Plant Room and Passenger Lift

The *Construction Certificate* plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must detail the sound attenuation works required to the plant room and passenger lift to ensure that noise from these components of the development do not to exceed the background noise level when measured at any boundary of the site.

**Note:** Further information including lists of Acoustic Engineers can be obtained from:

1. **Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au /index.php](http://www.acoustics.asn.au/index.php)).
2. **Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).  
Standard Condition: C61

### C.18 Acoustic Certification of Swimming Pool Plant and Equipment

The *Construction Certificate* plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must be accompanied by a certificate from a *professional engineer* (acoustic engineer) certifying that noise from the operation of mechanical plant and equipment will not exceed the background noise level when measured at any boundary of the site.

Where sound attenuation is required this must be detailed.

**Note:** Further information including lists of Acoustic Engineers can be obtained from:

1. **Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au /index.php](http://www.acoustics.asn.au/index.php)).
2. **Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).  
Standard Condition: C62

### C.19 Acoustic treatment to roof terraces

The open roof terraces on the south western side of the site shall be acoustically treated with a sound absorbent material to the walls and ceilings at all levels. The use must not result in transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*. Details of this acoustic treatment are to be submitted to Council or the PCA for approval prior to issue of a Construction Certificate. Sound attenuation must be maintained in accordance with this condition.

This condition has been imposed to protect the amenity of the neighbourhood.

**D. Conditions which must be satisfied prior to the commencement of any development work**

**D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4), or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

**D.2 Dilapidation Reports for existing buildings**

Dilapidation surveys must be conducted and dilapidation reports prepared by a *professional engineer* (structural) of all buildings on land whose title boundary abuts the site and of such further buildings located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration.

These properties must include (but is not be limited to):

- a. 4-5 Buckhurst Avenue
- b. 7 Buckhurst Avenue
- c. 10 Wolseley Road

The dilapidation reports must be completed and submitted to *Council* with the *Notice of Commencement* prior to the commencement of any *development work*.

Where excavation of the site will extend below the level of any immediately adjoining building the *principal contractor* or *owner builder* must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the *notice of commencement* required by s81A(2) of the *Act* not less than two (2) days prior to the commencement of any work.

Standard Condition: D4

### D.3 Adjoining buildings founded on loose foundation materials


The *principal contractor* must ensure that a *professional engineer* determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The *professional engineer* (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the *principal contractor* must comply with any reasonable direction of the *professional engineer*.

**Note:** A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.


Standard Condition: D6

### D.4 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

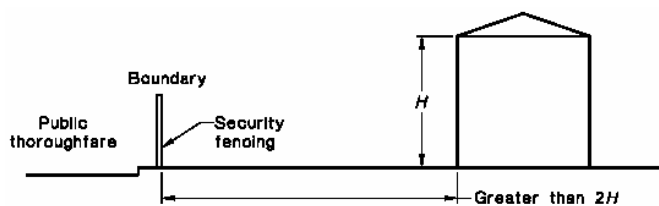

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

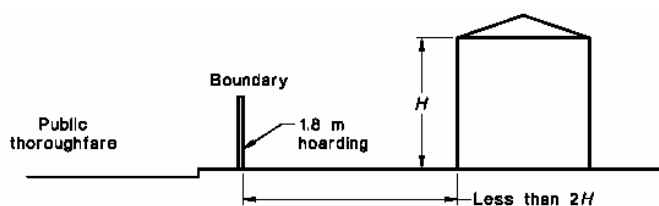


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- a. the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- b. the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- a. extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- b. have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- c. together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

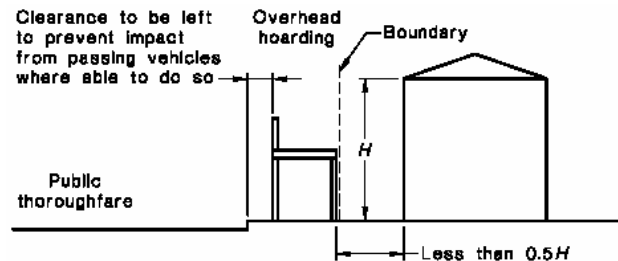

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/ohheadprotstructs.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

**Note:** The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.  
Standard Condition: D11

## D.5 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (“The Blue Book”).

Where there is any conflict The Blue Book takes precedence.

- Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.
- Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).
- Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.
- Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution” **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.  
Standard Condition: D14

#### **D.6 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4), or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

- Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

#### **D.7 Site Signs**

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.

2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws."

**Note:** *PCA and principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

## D.8 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

***accredited sewage management facility*** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

***approved by the council*** means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

***public sewer*** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

*sewage management facility* has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**Note:** This condition does not set aside the requirement to comply with Workcover NSW requirements.  
Standard Condition: D13

#### **D.9 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate Application, PCA Service Agreement and Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the Act.

Standard Condition: D15

#### **D.10 Notification of Home Building Act 1989 requirements**

- a. For the purposes of section 80A (11) of the Act, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
  - i. in the case of work for which a *principal contractor* is required to be appointed:
    - the name and licence number of the principal contractor, and
    - the name of the insurer by which the work is insured under Part 6 of that Act,
  - ii. in the case of work to be done by an owner-builder:
    - the name of the owner-builder, and
    - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.

Standard Condition: D17

#### **E. Conditions which must be satisfied during any development work**

##### **E.1 Tree Preservation**

All persons must comply with Council's *Tree Preservation Order* ("the TPO"), other than where varied by this consent. The order applies to any tree, with a height greater than 5 metres or a diameter spread of branches greater than 3 metres, is subject to Council's Tree Preservation Order unless, exempted by specific provisions. Works to be carried out within a 5 metre radius of any tree, subject to the Tree Preservation Order, require the prior written consent of Council.

##### General Protection Requirements

- a) There must be no excavation or *work* within the required Tree Protection Zone(s). The Tree Protection Zone(s) must be maintained during all *development work*.



- b) Where excavation encounters tree roots with a diameter exceeding 50mm excavation must cease. The *principal contractor* must procure an inspection of the tree roots exposed by a qualified arborist. Excavation must only recommence with the implementation of the recommendations of the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.
- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.

**Note:** Trees must be pruned in accordance with Australian Standard AS 4373 – 2007 “Pruning of Amenity Trees” and Workcover NSW Code of Practice Amenity Tree Industry 1998.  
Standard Condition: E8

## E.2 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

The following trees must be retained

Council Ref No	Species	Location	Dimension (metres)
1	<i>Erythrina sykesii</i> Coral Tree	South Western Boundary	10 x 14 m
2			9 x 9 m
3			12 x 10 m
4	<i>Jacaranda mimosifolia</i> Jacaranda	Northern Boundary	12 x 7 m
5	<i>Lophostemon confertus</i> Brushbox		11 x 4 m
	<i>Brachychiton acerifolius</i> Illawara Flame Tree		

The following trees must be removed

Council Ref No	Species	Location	Dimension (metres)
6,7,& 8	<i>Celtis.sp</i> Hackberry	North Eastern corner	8 x 5 m

**Note:** The trees that must be removed should appear coloured red on the construction certificate plans.

The following trees may be pruned in accordance with Australian Standard AS 4373 – 2007 “Pruning of Amenity Trees” and Workcover NSW Code of Practice Amenity Tree Industry, 1998 to the minimum extent necessary to provide clearance to the new development:

Council Ref No	Species	Location	Approved pruning specification (extent of pruning)
1	<i>Erythrina sykesii</i> Coral Tree	South Western Boundary	As per Section 5.14 of Arboricultural Assessment
2			

**Note:** The tree trees required to be pruned should appear coloured blue on the construction certificate plans.

**Note:** Water Restrictions take precedence over this condition.

**Note:** Having regard to water restrictions manual hosing may be necessary.  
Standard Condition: E9

### **E.3 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

### **E.4 Compliance with Construction Management Plan**

All development activities and traffic movements must be carried out in accordance with the approved construction management plan. In addition, deliveries to be limited to 7am to 3pm (during the school term) Monday to Friday. Further, a traffic controller is to be on site at all times and is to be used at the entrance to Buckhurst Avenue to ensure that the residents of Buckhurst Avenue have ingress and egress to their properties and that the residents ingress and egress takes priority over the truck access at all times.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

**Note:** Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.

Standard Condition: E3

### **E.5 Maintenance of Vehicular and Pedestrian Safety and Access**

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.

- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## E.6 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls
- b) Dust controls
- c) Dewatering discharges
- d) Noise controls
- e) Vibration monitoring and controls
- f) Ablutions

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## E.7 Compliance with Geotechnical/Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

**Note:** The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.

Standard Condition: E12

## E.8 Support of adjoining land and buildings

A person must not do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

**Note:** This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

**Note:** Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

**Note:** The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council's care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

Standard Condition: E13

## E.9 Vibration Monitoring

Vibration monitoring equipment must be installed and maintained, under the supervision of a *professional engineer* with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the *professional engineer* as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity an audible alarm must activate such that the *principal contractor* and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately. Prior to the vibration monitoring equipment being reset by the *professional engineer* and any further work recommencing the event must be recorded and the cause of the event identified and documented by the *professional engineer*.

Where the event requires, in the opinion of the *professional engineer*, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the *professional engineer* to the *principal contractor* and any sub-contractor clearly setting out required work practice.

The *principal contractor* and any sub-contractor must comply with all work directions, verbal or written, given by the *professional engineer*.

A copy of any written direction required by this condition must be provided to the *Principal Certifying Authority* within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the *professional engineer*, *principal contractor* and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the *professional engineer* to prevent any further damage and restore support to the *supported land*.

**Note:** *Professional engineer* has the same mean as in Clause A1.1 of the BCA.

**Note:** *Building* has the same meaning as in section 4 of the Act i.e. “*building* includes part of a building and any structure or part of a structure”.

**Note:** *Supported land* has the same meaning as in section 88K of the Conveyancing Act 1919.  
Standard Condition: E14

## E.10 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and

- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

### **E.11 Disposal of site water during construction**

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act 1993*;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act 1997*, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

**Note:** This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.  
Standard Condition: E17

### **E.12 Compliance with Council’s Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway**

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works. This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

**Note:** A copy of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" can be downloaded free of charge from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)  
Standard Condition: E24

### **E.13 Compliance with Australian Standard for Demolition**

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

### **E.14 Requirement to notify about new evidence**

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

### **E.15 Critical Stage Inspections**

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

**Note:** The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

**Note:** The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

### **E.16 Hours of Work –Amenity of the neighbourhood**

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. On private school days, no *deliveries* before 7am or after 3pm any weekday,
- d. No *work* must take place before 7am or after 1pm any Saturday, and
- e. On Saturdays no *deliveries* before 8am or after midday,
- f. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- g. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nlg.htm>.

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

### **E.17 Maintenance of Vehicular and Pedestrian Safety and Access**

The *principal contractor or owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:  
(a) erect a structure or carry out a work in, on or over a public road, or  
(b) dig up or disturb the surface of a public road, or



- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
- 2. Place waste in a public place
- 3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
- 2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council Approval* and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## E.18 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988* (Cth).

No illuminated sign(s) must be erected upon or displayed upon any site crane.

**Note:** Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

**Note:** Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.

Standard Condition: E19

## E.19 Check Surveys - boundary location, building location, building height, stormwater drainage system and flood protection measures relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of

the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA*'s satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.
- g) Flood protection measures are in place confirming location, height and capacity.

**Note:** This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.  
Standard Condition: E20

## **E.20 Placement and use of Skip Bins**

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

## **E.21 Dust Mitigation**

Dust mitigation must be implemented in accordance with "*Dust Control - Do it right on site*" published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.

- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au). Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

## **E.22 Swimming and Spa Pools – Temporary Child Resistant Barriers and other matters**

Temporary child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* where any swimming pool or spa pool as defined by the *Swimming Pools Act 1992* contains more than 300mm in depth of water at any time. Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* as soon as practical.

Backwash and any temporary dewatering from any swimming pool or spa pool as defined by the *Swimming Pools Act 1992* must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

**Note:** This condition does not prevent Council from issuing an order pursuant to section 23 of the *Swimming Pool Act 1992* or taking such further action as necessary for a breach of this condition or the *Swimming Pools Act 1992*.  
Standard Condition: E26

## **F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

### **F.1 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building.  
Standard Condition: F1

### **F.2 Fire Safety Certificates**

In the case of a *final occupation certificate* to authorise a person:

- a. to commence occupation or use of a *new building*, or
- b. to commence a change of building use for an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate has been issued for the building.

In the case of an *interim occupation certificate* to authorise a person:

- a. to commence occupation or use of a partially completed *new building*, or

- b. to commence a change of building use for part of an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate or an interim fire safety certificate has been issued for the relevant part of the building.

**Note:** This condition does not apply to a class 1a or class 10 building within the meaning of clause 167 of the Regulation.

**Note:** In this condition:

*interim fire safety certificate* has the same meaning as it has in Part 9 of the Regulation.

*final fire safety certificate* has the same meaning as it has in Part 9 of the Regulation.

*new building* has the same meaning as it has in section 109H of the Act.

Standard Condition: F4

### F.3 Street Numbering

The development must be provided with street and sole occupancy unit numbers determined by Council. This condition has been imposed to ensure that emergency services, utility services, and the general public are able to clearly and readily locate any property. Further, this condition has been imposed to protect the integrity of street numbering and land information.

**Note:** Applications for the allocation of street and sole occupancy unit numbers should be made together with any application for a strata certificate or Torrens or community title subdivision certificate. Council will determine at its discretion in accordance with its policy street numbers and street addresses that best suit the public interest.

Standard Condition: F11

### F.4 Letter Box(es)

All letter boxes must be constructed and located in accordance with AS/NZS 4253:1994 Mailboxes and to Australia Post's satisfaction.

**Note:** This condition has been imposed to ensure that mail can be delivered to occupiers of the site.

Standard Condition: F12

### F.5 Swimming and Spa Pools – Permanent Child Resistant Barriers and other matters

Prior to any occupation or use of the development and prior to filling any swimming pool as defined by the *Swimming Pool Act 1992*:

- a. Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992*.
- b. The *Principal Contractor* or *owner* must apply for and obtain a Compliance Certificate under section 24 of the *Swimming Pools Act 1992*.
- c. Public Pools must comply with the NSW Health Public Swimming Pool and Spa Pool Guidelines in force at that time and private pools are encouraged to comply with the same standards as applicable.
- d. Water recirculation and filtration systems must be installed in compliance with AS 1926.3-2003: *Swimming pool safety - Water recirculation and filtration systems*.

Backwash must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

- e. Water recirculation and filtration systems must be connected to the electricity supply by a timer that limits the systems operation such that it does not operate:
- (i) before 8 am or after 8 pm on any Sunday or public holiday, or
  - (ii) before 7 am or after 8 pm on any other day.

**Note:** The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from:  
<http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>  
Standard Condition: F13

## F.6 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, Development Standards, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

## **G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

### **G.1 Electricity Substations – Dedication as road and/or easements for access**

If an electricity substation, is required on the site the owner must dedicate to the appropriate energy authority (to its satisfaction), free of cost, an area of land adjoining the street alignment to enable an electricity substation to be established. The size and location of the electricity substation is to be in accordance with the requirements of the appropriate energy authority and Council. The opening of any access doors are not to intrude onto the public road (footway or road pavement).

Documentary evidence of compliance, including correspondence from the energy authority is to be provided to the *Principal Certifying Authority* prior to issue of the Construction Certificate detailing energy authority requirements. The Accredited Certifier must be satisfied that the requirements of energy authority have been met prior to issue of the Construction Certificate.

Where an electricity substation is provided on the site adjoining the road boundary, the area within which the electricity substation is located must be dedicated as public road. Where access is required across the site to access an electricity substation an easement for access across the site from the public place must be created upon the linen plans burdening the subject site and benefiting the Crown in right of New South Wales and any Statutory Corporation requiring access to the electricity substation.

Standard Condition: G4

## **H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

### **H.1 Fulfillment of BASIX commitments – Clause 154B of the Regulation**

All BASIX commitments must be effected in accordance with the following *BASIX Certificates*: -

- Certificate No. A28212S for the swimming pool within the front yard
- Certificate No. A28197 for Unit 1 on the ground floor level
- Certificate No. A28198 for Unit 2 on the ground floor level
- Certificate No. A28211 for Unit 3 on the first floor level
- Certificate No. A28196 for Unit 4 on the first floor level
- Certificate No. A28212 for Unit 5 on the second floor level
- Certificate No. A28195 for Unit 6 on the second floor level
- Certificate No. A28213 for Unit 7 on the third floor level
- Certificate No. A28194 for Unit 8 on the third floor level
- Certificate No. A28278 for Unit 9 on the fourth floor level
- Certificate No. A28193 for Unit 10 on the fourth floor level
- Certificate No. A28214 for Unit 11 on the fifth floor level
- Certificate No. A28192 for Unit 12 on the fifth floor level

**Note:** Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled."

Standard Condition: H7

## H.2 Removal of Ancillary Works and Structures

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H12

## I. Conditions which must be satisfied during the ongoing use of the development

### I.1 Maintenance of BASIX commitments

All BASIX commitments must be maintained in accordance with the following BASIX Certificates: -

- Certificate No. A28212S for the swimming pool within the front yard
- Certificate No. A28197 for Unit 1 on the ground floor level
- Certificate No. A28198 for Unit 2 on the ground floor level
- Certificate No. A28211 for Unit 3 on the first floor level
- Certificate No. A28196 for Unit 4 on the first floor level
- Certificate No. A28212 for Unit 5 on the second floor level
- Certificate No. A28195 for Unit 6 on the second floor level
- Certificate No. A28213 for Unit 7 on the third floor level
- Certificate No. A28194 for Unit 8 on the third floor level
- Certificate No. A28278 for Unit 9 on the fourth floor level
- Certificate No. A28193 for Unit 10 on the fourth floor level
- Certificate No. A28214 for Unit 11 on the fifth floor level
- Certificate No. A28192 for Unit 12 on the fifth floor level

**Note:** This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.  
Standard Condition: I7

### I.2 Clothes drying etcetera

No clothes, linen or the like must be hung from any balcony, terrace or veranda such that they are visible from any public place. This condition has been imposed to ensure that the visual amenity of the neighbourhood is not detrimentally affected by a proliferation of such practices.

Standard Condition: I9

### I.3 Maintenance of Landscaping

All landscaping must be maintained in general accordance with this consent.

**Reason:** This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

**Note:** This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled “Local Native Plants for Sydney’s Eastern Suburbs” published by Woollahra, Waverley, Randwick and Botany Bay Councils.  
Standard Condition: I8

#### **I.4 Swimming and Spa Pools – Maintenance**

Swimming and Spa Pools must be maintained:

- a. in compliance with the *Swimming Pools Act 1992* with regard to the provision of child-resistant barriers and resuscitation signs;
- b. in compliance with the NSW Health “Public Swimming Pool and Spa Pool Guidelines” in force at that time. Private pools are encouraged to comply with the same standards as applicable;
- c. in compliance with AS 1926.3-2003:Swimming pool safety - Water recirculation and filtration systems ;
- d. with backwash being discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996, and
- e. with a timer that limits the recirculation and filtration systems operation such that it does not emit noise that can be heard within a habitable room in any other residential premises (regardless of whether any door or window to that room is open):
  - before 8 am or after 8 pm on any Sunday or public holiday, or
  - before 7 am or after 8 pm on any other day.

**Note:** Child-resistant barriers, resuscitation signs, recirculation and filtration systems and controls systems require regular maintenance to ensure that life safety, health and amenity standards are maintained.

**Note:** The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from:  
<http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>  
Standard Condition: I13

#### **I.5 Annual Fire Safety Statements (Class 1b to 9c buildings inclusive)**

Each year, the owner of a building to which an *essential fire safety measure* is applicable must provide an *annual fire safety statement* to Council and the Commissioner of the NSW Fire Brigades. The *annual fire safety statement* must be prominently displayed in the building.

**Note:** *Essential fire safety measure* has the same meaning as in clause 165 of the *Regulation*. *Annual fire safety statement* has the same meaning as in clause 175 of the *Regulation*. Part 9 Division 5 of the *Regulation* applies in addition to this condition at the date of this consent. Visit Council’s web site for additional information in relation to fire safety [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).  
Standard Condition: I22

#### **I.6 Outdoor lighting – Residential**

Outdoor lighting must comply with AS 4282-1997: Control of the obtrusive effects of outdoor lighting. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.



**Reason:** This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.

**Note:** This condition has been imposed to control the obtrusive effects of outdoor lighting.  
Standard Condition: I42

## I.7 Commercial Waste Management

The owner and any occupier must comply with the approved *Waste Management Plan*. All waste must be presented for collection in a receptacle. Waste receptacles must be presented no earlier than close of business on day before collection and removed from collection point an hour after open of business on day of collection. Receptacles are not to be stored in any public place at anytime. Waste and recycling receptacles must be stored at all times within the boundaries of the site.

**Note:** No waste will be collected by Council that isn't presented properly. The waste must be presented with lid closed to reduce littering.  
Standard Condition: I46

## I.8 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

**Reason:** This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) publish by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

### Useful links:

**Community Justice Centres**—free mediation service provided by the NSW Government ([www.cjc.nsw.gov.au](http://www.cjc.nsw.gov.au)).

**Department of Environment and Conservation NSW**, Noise Policy Section web page ([www.environment.nsw.gov.au/noise](http://www.environment.nsw.gov.au/noise)).

**New South Wales Government Legislation** home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* ([www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)).

**Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au/index.php](http://www.acoustics.asn.au/index.php)).

**Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).

**Department of Gaming and Racing** - ([www.dgr.nsw.gov.au](http://www.dgr.nsw.gov.au)).

Standard Condition: I50

## I.9 Noise from mechanical plant and equipment

Noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

**Reason:** This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Words in this condition have the same meaning as in the:  
*NSW Industrial Noise Policy* ([http://www.environment.nsw.gov.au/resources/ind\\_noise.pdf](http://www.environment.nsw.gov.au/resources/ind_noise.pdf))  
ISBN 0 7313 2715 2, dated January 2000, and  
*Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>)  
ISBN 1741370671, dated December 2004.  
Standard Condition: I53

## **J. Miscellaneous Conditions**

Nil.

## **K. Advising**

### **K.1 Pruning or Removing a Tree Growing on Private Property**

Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

### **K.2 Criminal Offences – Breach of Development Consent & Environmental laws**

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

#### **Warnings as to potential maximum penalties**

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

#### **Warning as to enforcement and legal costs**

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain

further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's

[www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

### K.3 Dial before you dig



The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

### K.4 Commonwealth Disability Discrimination Act 1992 (“DDA”)

The Disability Discrimination Act 1992 (DDA) makes it against the law for public places to be inaccessible to people with a disability. Compliance with this development consent, Council's Access DCP and the BCA does not necessarily satisfy compliance with the DDA.

The DDA applies to existing places as well as places under construction. Existing places must be modified and be accessible (except where this would involve "unjustifiable hardship").

Further detailed advice can be obtained from the Human Rights and Equal Opportunity Commission (“HEROC”):

- <http://www.hreoc.gov.au/index.html>
- [http://www.hreoc.gov.au/disability\\_rights/dda\\_guide/ins/ins.html](http://www.hreoc.gov.au/disability_rights/dda_guide/ins/ins.html)

If you have any further questions relating to the application of the DDA you can send and email to HEROC at [disabdis@humanrights.gov.au](mailto:disabdis@humanrights.gov.au).

Standard Advising: K3

### K.5 NSW Police Service and Road Closures

The Rose Bay Local Area Command closely aligns with the boundaries of the Woollahra local government area.

Council and Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Traffic Sergeant, Paddington Police Station, 16 Jersey Road, Paddington. Phone No. 02 8356 8299 or Fax No. 0283568211.

**Warning:** If you partially or fully close a road without compliance with Council and Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution.

Standard Advising: K4

## K.6 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appointed a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):  
<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

## K.7 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

## K.8 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW's website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

### **K.9 Asbestos Removal, Repair or Disturbance**

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

**Note:** The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) or one of Workcover NSW's offices for further advice.  
Standard Advising: K8

### **K.10 Lead Paint**

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1–1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2–1998, Guide to Lead Paint Management—Residential and Commercial Buildings.

Industrial paints may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.

Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

Standard Advising: K9

### **K.11 Decommissioning of fire protection systems**

Decommissioning of any Halon extinguishers and fixed flooding systems must be carried out by a technician authorised under the *Ozone Protection Act 1989*.

Yellow portable fire extinguishers contain halon. From 31 December 1995, use or possession of these extinguishers without approval has been illegal.

Standard Advising: K12

## K.12 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>  
Standard Condition: K15

## K.13 Recycling of Demolition and Building Material

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

---

### **D7 DA932/1999 Part 3 – 144 Victoria Road, Bellevue Hill – Section 96 Application Proposed modification Condition No. 10 to allow increase in the height of landscaping on rear boundary – 13/07/2007.**

**Note:** Johanna Kulia of Bellevue Hill, Jan McCloskey of Bellevue Hill, objectors and Robert Fiani the owner and applicant addressed the Committee.

**Note:** The Committee amended Condition No.41.

**(Shoebridge/Gardner)**

**Resolved: Pursuant to Section 96 of the Environmental Planning and Assessment Act, 1979**

THAT Council, as the consent authority, modify development consent to Development Application No. 932/1999 part 3 for alterations and additions on land at 144 Victoria Road Bellevue Hill, in the following manner:

**The modification of Condition No. 10:**

10. All landscape works depicted on Landscape Plan No.LA01c dated 23.12.1999 drawn by D.M.Taylor is to be completed and maintained with the exception that the references to the height of planting along the rear boundary is to be maintained and trimmed to a maximum height of 4.5 metres is deleted.

**The addition of Condition No. 41:**

41. The planting along the rear boundary is to be maintained and trimmed to a maximum height of 6.5 metres.

---

**D8 DA688/2007 – 7-21 Saber Street, Woollahra – Demolition of existing building & erection of new community facility building, three storeys in height with basement parking – 24/10/2007**

**Note:** George Karavanas GSA Planning on behalf of the applicant, Joseph Riva representing the owner and Denis Revikitz the Architect addressed the Committee.

**(Dawson/Shoebridge)**

**Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979**

THAT Council, as the consent authority, is of the opinion that the objections under *State Environmental Planning Policy No. 1 – Development Standards* to Floor Space Ratio and Height under Woollahra Local Environmental Plan 1995 are well founded. The Council is also of the opinion that strict compliance with the development standards are unreasonable and unnecessary in the circumstances of this case as the development will still uphold the objectives underlying the development standards;

**AND**

THAT the Council, as the consent authority, being satisfied that the objections under SEPP No. 1 are well founded and also being of the opinion that the granting of consent to Development Application No. 688/2007/1 is consistent with the aims of the Policy, grant development consent to Development Application No. 688/2007/1 for demolition of the existing and erection of a new community facility building, three-storeys in height with basement parking on land at 7-21 Saber Street Woollahra, subject to the following conditions:

**A. General Conditions****A.1 Conditions**

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

## A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

*Applicant* means the applicant for this Consent.

*Approved Plans* mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

*AS* or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

*BCA* means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

*Council* means Woollahra Municipal Council

*Court* means the Land and Environment Court

*Food Business* means a business, enterprise or activity (other than primary food production) that involves:

- a. The handling of food intended for sale, or
- b. The sale of food.

*Local native plants* means species of native plant endemic to Sydney's eastern suburbs (see the brochure titled "Local Native Plants for Sydney's Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

*Stormwater Drainage System* means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

*Owner* means the owner of the *site* and successors in title to the *site*.

*Owner Builder* has the same meaning as in the *Home Building Act 1989*.

*PCA* means the *Principal Certifying Authority* under the *Act*.

*Principal Contractor* has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

*Professional Engineer* has the same meaning as in the *BCA*.

*Public Place* has the same meaning as in the *Local Government Act 1993*.



*Road* has the same mean as in the *Roads Act 1993*.

*SEE* means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

*Site* means the land being developed subject to this consent.

*WLEP 1995* means *Woollahra Local Environmental Plan 1995*

*Work* for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

**Note: Interpretation of Conditions** - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.  
Standard Condition: A2

### A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp "Approved DA Plans" **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
DA 101D, 202E, 203D, 204D, 210G, 220F and 221F; and, DA 200F, 201H and 211G	Architectural Plans	JPR Architects Pty Ltd	26.09.2007 30.04.2008
	Construction Management Plan	Buildline Constructions	11.11.2007
21531SYrpt	Geotechnical Investigation	Jeffery and Katauskas Pty Ltd	05.10.2007
SK01/2 and SK02/2	Landscape Plan	Umbaco Landscape Architects Pty Ltd	29.04.2008
	Tree Report	Treescan	May 2008
H - DA - 00B, 01B & 02B	Stormwater Drainage Plan	itm Design Pty Ltd	20.09.2007

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

#### **A.4 Ancillary Aspect of the Development (s80A(2) of the Act)**

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

**Note:** This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.  
Standard Condition: A8

#### **A.5 Prescribed Conditions**

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

**Note:** It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at [www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)  
Standard Condition: A30

### **B. Conditions which must be satisfied prior to the demolition of any building or construction**

#### **B.1 Construction Certificate required prior to any demolition**

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the *Act*. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the *Act*.

**Note:** See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.  
Standard Condition: B1

#### **B.2 Establishment of Tree Protection Zones**

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

(a) Tree Protection Zone areas

Council Ref. No.	Species	Location	Radius from Trunk (metres)*
1	<i>Citharexylum spinosum</i> Fiddlewood Tree	Council verge – Front north east	1m
2	<i>Ficus microcarpa</i> var. 'Hillii' Hills Weeping Fig	Council verge – Front centre	4m
3	<i>Lophostemon confertus</i> Brush Box	Council verge – Front west	1m

**\*NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- (b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- (c) Trunk protection, to a maximum height permitted by the first branches, is to be installed around the trunks of the trees listed in the table below;

Council Ref. No:	Species	Location
1	<i>Citharexylum spinosum</i> Fiddlewood Tree	Council verge – Front north east
2	<i>Ficus microcarpa</i> var. 'Hillii' Hills Weeping Fig	Council verge – Front centre
3	<i>Lophostemon confertus</i> Brush Box	Council verge – Front west

A padding material eg. Hessian or thick carpet underlay, is to be wrapt around the trunk first. Harwood planks, 50x100mm and to the maximum possible length, are to be placed over the padding and around the trunk of the tree at 150mm centres. These planks are to be secured in place by 8 gauge wire at 300mm spacing.

- (d) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- (e) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- (f) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- (g) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones. Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

**C. Conditions which must be satisfied prior to the issue of any construction certificate**

**C.1 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)**

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> Use Calculator: <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation or use their online calculator	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit -</b> Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$92,400.00	No	T115
<b>Tree Damage Security Deposit –</b> Making good any damage caused to any public tree as a consequence of the doing of anything to which the consent relates.	\$27,228.00	No	T114
<b>Infrastructure Works Bond –</b> Remedying any defects in any public work that arise within 6 months after the work is completed as a consequence of carrying out the development.	\$19,700.00	No	T113
<b>DEVELOPMENT LEVY</b> under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy (S94A)	\$45,200.00 + Index Amount	Yes, quarterly	T96
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Public Tree Management Inspection Fee	\$160.00	No	T95
Public Road and Footpath Infrastructure Inspection Fee (S138 Fee)	\$363.25	No	T45
Security Administration Fee	\$168.00	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>	\$185,219.25 <b>Plus any relevant indexed amounts and long service levy</b>		

## **Building & Construction Industry Long Service Payment**

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

**Note:** The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

### **How must the payments be made?**

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

### **How will the section 94A levy be indexed?**

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

### **Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

### **Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;

- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

## C.2 Road and Public Domain Works – Council approval required

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to ***Council's Development Engineer*** and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*. To accommodate this requirement, the following infrastructure works must be carried out on Council property at the Applicants expense:

### Road & Footpath

- Removal of all driveway crossings and kerb laybacks which will be no longer required.
- Reinstatement of footpath, kerb and gutter to match existing.

### Drainage

- Construction of a standard gully pit in the kerb fronting the subject site in accordance with Council's Standard "Grated Gully Pit with extended Kerb Inlet" drawing DR1.
- Construction of approximately 11m of 375mm RCP in-ground drainage line under the kerb and gutter at standard depth. The line must connect the new gully pit to the existing Council pit located downstream at the north eastern corner of Saber and Newland Street.
- The developer shall be responsible for carrying out any service investigations to allow a gravity connection.

### Bond

- A bond of \$ 19,700.00 will be used as security to ensure the satisfactory completion of the infrastructure works. The security or bank guarantee must not have an expiry date.
- Council may use all or part of the Infrastructure Bond as well as the Property Damage Security Deposit to meet the cost of removing or completing the works if they do not meet Council's requirements.
- The Deposit/Bond will not be released until Council has inspected the site and is satisfied that the Works have been completed in accordance with Council approved drawings and to Council requirements

An “Application to carry out works in a Public Road” form (available from Councils web-site <http://www.woollahra.nsw.gov.au>) must be completed and lodged, with the Application fee, at Councils Customer Services counter. Detailed engineering plans and specifications of the works required by this Condition must accompany the Application form. The plans must clearly show the following:

- Engineering drawings (plan, sections and elevation views) and specifications of the footpath, driveways, kerb & gutter, new gully pit showing clearly the connection point of site outlet pipe(s). Note, the connection drainage lines must be as direct as possible and generally run perpendicular to the kerb alignment.
- Engineering drawings of the new drainage line to be constructed joining the new and existing drainage pits including services.

The design of the works must be in accordance with Council’s Draft Stormwater Drainage Management DCP (Draft Version 1, Public Exhibition Copy dated 23/08/2004) available from Council’s website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au). Four weeks should be allowed for assessment.

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain design and construction works must comply with Council’s “*Specification for Roadworks, Drainage and Miscellaneous Works*” dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) .

**Note:** To ensure that this work is completed to Council’s satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

**Note:** *Road* has the same meaning as in the *Roads Act 1993*.

**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

### **C.3 Waste Storage – Mixed Developments (both commercial and residential)**

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications must make provision for:

- a. the storage of waste and recycling bins behind the building line or within non-habitable areas of the building,
- b. two separate centralised waste and recycling rooms or areas, one for commercial waste and one for residential waste. They must be self-contained and have separate keys and locking systems.
- c. the path for wheeling bins between the waste and recycling storage area and the collection point must be free of steps and kerbs and having a maximum grade of 1:8. The waste storage area must be as close as possible to the service road collection point.
- d. bins to be stored with lids down to prevent vermin from entering the waste containers.

- e. smooth impervious floor graded to a floor waste and provided with a tap and hose to facilitate regular cleaning of the bins. A waste storage area that is located internal to the building must be fitted with both a hot and cold water supply and hose cocks. Wastewater must be discharged to the sewer in accordance with the requirements of Sydney Water.
- f. walls and ceilings of the waste storage area must be constructed of an impervious material with a smooth finish. The junction between the walls and the floor must be covered with a minimum radius of 25mm to prevent the accumulation of waste matter.
- g. the garbage storage area must be well lit to enable use at night. A timer switch must be fitted to the light fitting to ensure the light is turned off after use.
- h. Odour problems must be minimised by exhaust ventilation.
- i. Both putrescible and recycling bins/crates must be stored together. Recycling bins must never stand alone. They must always be located beside putrescible waste bins. Putrescible bins must be located closest to the entrance to the waste storage room.
- j. Signage on the correct use of the waste management system and what materials may be recycled must be posted in the communal waste storage cupboard/ room or bin bay.

Standard Condition: C18

#### C.4 Utility Services Generally

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

**Note:** Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

**Note:** The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The *Construction Certificate* plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the *Regulation*, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.



**Note:** This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest.  
Standard Condition: C20

### C.5 Soil and Water Management Plan – Submission & Approval

The *principal contractor or owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

**Note:** This condition has been imposed to eliminate potential water pollution and dust nuisance.

**Note:** The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

**Note:** The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/> .

**Note:** Pursuant to clause 161(1)(a)(5) of the *Regulation an Accredited Certifier* may satisfied as to this matter.  
Standard Condition: C25

### C.6 Tree Management Details

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation* must, show the following information;

- a. trees to be numbered in accordance with these conditions,
- b. shaded green where required to be protected and retained,
- c. shaded yellow where required to be transplanted,
- d. shaded blue where required to be pruned,
- e. shaded red where authorised to be removed and,
- f. references to applicable tree management plan, arborists report, transplant method statement or bush regeneration management plan.

Standard Condition: C30

### C.7 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

### C.8 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:
  - i. Will detect any settlement associated with temporary and permanent works and structures;
  - ii. Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
  - iii. Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);
  - iv. Will detect groundwater changes calibrated against natural groundwater variations;

details:

- the location and type of monitoring systems to be utilised;
- the preset acceptable limits for peak particle velocity and ground water fluctuations;
- recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
- a contingency plan.

Standard Condition: C40

### C.9 Ground Anchors

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

The use of permanent ground anchors under Council land is not permitted.

Temporary ground anchors may be permitted, in accordance with Council's "Rock Anchor Policy", where alternative methods of stabilisation would not be practicable or viable, and where there would be benefits in terms of reduced community impact due to a shorter construction period, reduced disruption to pedestrian and vehicular traffic on adjacent public roads, and a safer working environment.

If temporary ground anchors under Council land are proposed, a separate application, including payment of fees, must be made to Council under Section 138 of the *Roads Act* 1993. Application forms and Council's "Rock Anchor Policy" are available from Council's web-site <http://www.woollahra.nsw.gov.au>. Approval may be granted subject to conditions of consent. Four weeks should be allowed for assessment.

**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

**Note:** *Road* has the same meaning as in the *Roads Act* 1993.

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the *Roads Act* 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.  
Standard Condition: C41

### **C.10 Stormwater management plan (Site greater than 500m<sup>2</sup>)(Clause 25(2) WLEP 1995)**

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include a *Stormwater Management Plan* for the site.

The *Stormwater Management Plan* must detail:

- a. general design in accordance with Stormwater disposal concept plan prepared by itm design, dwg no H-DA-00 – H-DA-02 other than amended by this and other conditions;
- b. the discharge of stormwater, by direct connection, to the newly constructed DGGP on the south eastern corner of Saber and Newland Street, which is in turn connected to the existing pit on the existing pit on the north eastern corner of Saber and Newland Street;
- c. compliance the objectives and performance requirements of the BCA;
- d. any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- e. general compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004), and
- f. on-site stormwater detention ("OSD")

#### **OSD Requirements**

The minimum (OSD) Site Storage Requirements ("SSR") and the Peak Site Discharge ("PSD") from the site must be in accordance with the following minimum storage/discharge relationships based upon a 1000m<sup>2</sup> site area:

Average Reoccurrence Interval	PSD L/s	Minimum Site Storage Requirement (SSR) <sup>m<sup>3</sup></sup>
2 year	23.5 L/s	4m <sup>3</sup>
100 year	34 L/s	25m <sup>3</sup> – Dwelling House 27m <sup>3</sup> – Residential Flat Building 29m <sup>3</sup> – Other Development
All values based on per 1000m <sup>2</sup> site area (interpolate to site area).		

Where a rainwater tank is proposed in conjunction with OSD, the volume of the rainwater tank may contribute to the SSR as follows:

- i. Where the rainwater tank is used for external uses only, 40% of the rainwater tank volume to a maximum of 4m<sup>3</sup>, or
- ii. Where the rainwater tank is used for external and internal uses, 75% of the rainwater tank volume to a maximum of 7.5m<sup>3</sup>.

**Example:** The Site Storage Requirements may be 25,000 litres and a 10,000 litre rainwater tank is to be used for garden irrigation. Therefore, the rainwater tank contributes 4,000 litres toward SSR. Therefore, the OSD tank needs to be 21,000 litres (25,000 litres less the 4,000 litres allowance). Note: 1m<sup>3</sup> = 1,000 litres.

The *Stormwater Management Plan* must include the following specific requirements:

### Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off, 1987* edition or most current version thereof.

It must include:

- All pipe layouts, dimensions, grades, lengths and material specification,
- Location of On-Site Detention,
- All invert levels reduced to Australian Height Datum (AHD),
- Location and dimensions of all drainage pits,
- Point and method of connection to Councils drainage infrastructure, and
- Overland flow paths over impervious areas.

### On-site Detention (OSD) details:

- Any potential conflict between existing and proposed trees and vegetation,
- Internal dimensions and volume of the proposed detention storage,
- Diameter of the outlet to the proposed detention storage basin,
- Plans, elevations and sections showing the detention storage basin invert level, centre-line level of outlet, top water level, finished surface level and adjacent structures,
- Details of access and maintenance facilities,
- Construction and structural details of all tanks and pits and/or manufacturer's specifications for proprietary products,
- Details of the emergency overland flow-path (to an approved Council drainage point) in the event of a blockage to the on-site detention system,
- Non-removable fixing details for orifice plates where used,

Copies of certificates of title, showing the creation of private easements to drain water by gravity, if required.

Subsoil Drainage - Subsoil drainage details, clean out points, discharge point.

**Note:** This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

Standard Condition: C51

### C.11 Light & Ventilation

The *Construction Certificate* plans and specifications, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail all a lighting, mechanical ventilation or air-conditioning systems complying with Part F.4 of the *BCA* or clause 3.8.4 and 3.8.5 of the *BCA* Housing Provisions, inclusive of [AS 1668.1](#), [AS 1668.2](#) and [AS/NZS 3666.1](#).

If an alternate solution is proposed then the *Construction Certificate* application must include a statement as to how the performance requirements of the *BCA* are to be complied with and support the performance based solution by expert *evidence of suitability*. This condition does not set aside the mandatory requirements of the *Public Health (Microbial Control) Regulation 2000* in relation to *regulated systems*. This condition does not set aside the effect of the *Protection of the Environment Operations Act 1997* in relation to offensive noise or odour.

**Note:** Clause 98 of the *Regulation* requires compliance with the *BCA*. Clause 145 of the *Regulation* prevents the issue of a *Construction Certificate* unless the *Accredited Certifier/Council* is satisfied that compliance has been achieved. Schedule 1, Part 3 of the *Regulation* details what information must be submitted with any *Construction Certificate*. It is the Applicant's responsibility to demonstrate compliance through the *Construction Certificate* application process. Applicants must also consider possible noise and odour nuisances that may arise. The provisions of the *Protection of the Environment Operations Act 1997* have overriding effect if offensive noise or odour arises from the use. Applicant's must pay attention to the location of air intakes and air exhausts relative to sources of potentially contaminated air and neighbouring windows and air intakes respectively, see section 2 and 3 of [AS 1668.2](#).

Standard Condition C59

### C.12 Food Premises – Construction Certificate Plans & Specifications

The person with the benefit of this consent must submit to Council details for the construction and fit out of food premises. Such details must demonstrate compliance with the *Food Act 2003*, *Food Regulation 2004*; the *Food Standards Code* as published by Food Standards Australia and New Zealand and Australian Standard AS 4674-2004: *Construction and fit out of food premises*.

No *Construction Certificate* relating to the construction or fitout of food premises must be issued until Council's Environmental Health Officers' have advised in writing that the plans and specification are considered satisfactory.

The details for the construction and fit out of food premises, as considered satisfactory by Council's Environmental Health Officers' must form part of any *Construction Certificate*.

**Note:** The assessment of food premises fitout plans and specifications is subject to an adopted fee. The construction and fitout of food premises is not listed under clause 161 of the *Environmental Planning & Assessment Regulation 2000* as a matter that a *Certifying Authority* may be satisfied as to. Hence, the detailed plans & specifications must be referred to Council and be to Council's satisfaction prior to the issue of any *Construction Certificate* for such works.

Standard Condition: C65

**D. Conditions which must be satisfied prior to the commencement of any development work**

**D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),  
or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.

Standard Condition: D1

**D.2 Dilapidation Reports for existing buildings**

Dilapidation surveys must be conducted and dilapidation reports prepared by a *professional engineer* (structural) of all buildings on land whose title boundary abuts the site and of such further buildings located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration.

These properties must include (but is not be limited to):

- 23 Saber Street, Woollahra.

The dilapidation reports must be completed and submitted to *Council* with the *Notice of Commencement* prior to the commencement of any *development work*.

Where excavation of the site will extend below the level of any immediately adjoining building the *principal contractor* or *owner builder* must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the *notice of commencement* required by s81A(2) of the *Act* not less than two (2) days prior to the commencement of any work.

Standard Condition: D4

### D.3 Dilapidation Reports for Public Infrastructure

To clarify the existing state of public infrastructure prior to the commencement of any development (including prior to any demotion), the *Principal Contractor* must submit a dilapidation report on Council's infrastructure within and near the development site.

The dilapidation report must be submitted to Council prior to the commencement of any work and include:

- a. Photographs showing any existing damage to the road pavement on Saber Street,
- b. Photographs showing any existing damage to the kerb and gutter on Saber Street,
- c. Photographs showing any existing damage to the footway including footpath pavement on Saber Street,

The dilapidation report must specify (with supporting photographic/DVD evidence) the exact location and extent of any damaged or defective public infrastructure prior to the commencement of any work. If the required report is not submitted then Council will assume there was no damage to any infrastructure in the immediate vicinity of the site prior to the commencement of any work under this consent.

**Note:** If the Principal Contractor fails to submit the dilapidation report required by this condition and damage is occasioned to public assets adjoining the site Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose.

Standard Condition: D5

### D.4 Adjoining buildings founded on loose foundation materials

The *principal contractor* must ensure that a *professional engineer* determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The *professional engineer* (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the *principal contractor* must comply with any reasonable direction of the *professional engineer*.

**Note:** A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.

Standard Condition: D6

### D.5 Construction Management Plan

The construction management plan submitted with the development application - dated 11<sup>th</sup> November 2007 prepared by Buildline Constructions must be revised to address the following matters. The revised construction management plan must be submitted to and approved by Council's Development Engineer before the commencement of demolition, excavation or construction works.

The following concerns must be addressed:-

- It is not possible to establish a Work Zone fronting the site given this zone is designated “No Parking”. The plan must be revised to demonstrate how all the works will be contained within the boundaries of the site.
- The standing of construction vehicles in Rowe/ Sabre Street is not permitted. The plan must nominate a construction vehicle queuing/ marshalling area OR a method of communication to call vehicles to the site.
- All vehicles servicing the construction site must be of type and size to safely manoeuvre within Sabre Street. The applicant must submit vehicle turning templates to demonstrate vehicles accessing the site may do so without the removal of onstreet parking opposite and in a safe manner.

The following requirements are Council’s standard level of information to be contained within Construction Management plans. The Plan must:-

- a. describe the anticipated impact of the construction works on:**
  - local traffic routes
  - pedestrian circulation adjacent to the building site
  - and on-street parking in the local area, and;
- b. describe the means proposed to:**
  - manage construction works to minimise such impacts,
  - provide for the standing of vehicles during construction,
  - provide for the movement of trucks to and from the site, and deliveries to the site, and;
- c. show the location of:**
  - any site sheds and any anticipated use of cranes and concrete pumps,
  - any areas of Council property on which it is proposed to install a Works Zone (Construction Zone),
  - structures to be erected such as hoardings, scaffolding or shoring,
  - any excavation.
- d. describe the excavation impact on the area including**
  - Number and types of trucks to be used
  - Time frame
  - Streets to be used
  - Routes to be taken
  - Directions of travel
  - Truck storage areas
  - It is recommended that vehicle routes be shared
  - Excavation is to only be carried out outside peak and school hours between 9.30am to 2.30pm week days
  - The CMP is to include both demolition and excavation works.
- e. show the location** of all Tree Protection (Exclusion) Zones as required within the conditions of this development consent.


The Plan must make provision for all materials, plant, etc. to be stored within the development site at all times during construction. Structures or works on Council property such as hoardings, scaffolding, shoring or excavation need separate approval from Council. Standing of cranes and concrete pumps on Council property will need approval on each occasion.

**Note:** A minimum of eight weeks will be required for assessment. Work must not commence until the Construction Management Plan is approved. Failure to comply with this condition may result in fines and proceedings to stop work.  
Standard Condition: D9




## D.6 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

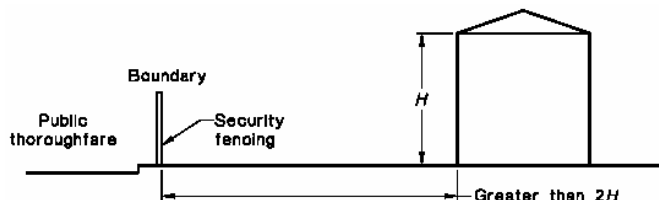

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

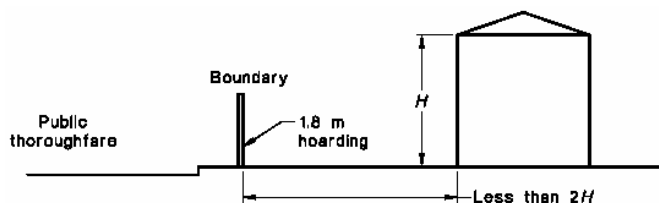


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

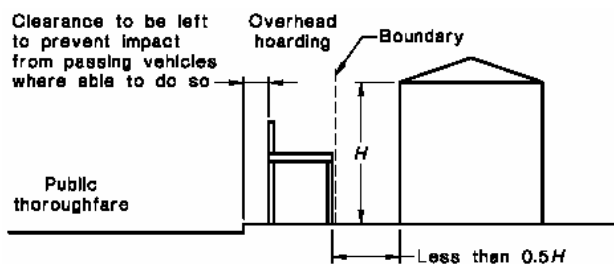

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstr ucts.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

**Note:** The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.  
Standard Condition: D11

## D.7 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State’s building laws.”

**Note:** *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

## D.8 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

**accredited sewage management facility** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

**approved by the council** means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

**public sewer** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**sewage management facility** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**Note:** This condition does not set aside the requirement to comply with Workcover NSW requirements.  
Standard Condition: D13

## D.9 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (“The Blue Book”).

Where there is any conflict The Blue Book takes precedence.

**Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

**Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be downloaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

**Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution” **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

Standard Condition: D14

#### **D.10 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days’ notice to the council of the person’s intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the Act and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the Act (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) .

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the Act.  
Standard Condition: D15

## D.11 Establishment of boundary location, building location and datum

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;
- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

**Note:** Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

**Note:** On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.  
Standard Condition: D18

## E. Conditions which must be satisfied during any development work

### E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

## **E.2 Compliance with Australian Standard for Demolition**

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

## **E.3 Compliance with Construction Management Plan**

All development activities and traffic movements must be carried out in accordance with the approved construction management plan.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

**Note:** Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.

Standard Condition: E3

## **E.4 Requirement to notify about new evidence**

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

## **E.5 Critical Stage Inspections**

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the PCA and any PCA Service Agreement.

**Note:** The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

**Note:** The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

## E.6 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm> .

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

## E.7 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## E.8 Tree Preservation

All persons must comply with Council’s *Tree Preservation Order* (“the TPO”), other than where varied by this consent. The order applies to any tree, with a height greater than 5 metres or a diameter spread of branches greater than 3 metres, is subject to Council’s Tree Preservation Order unless, exempted by specific provisions. Works to be carried out within a 5 metre radius of any tree, subject to the Tree Preservation Order, require the prior written consent of Council.

### General Protection Requirements:

- a) There must be no excavation or *work* within the required Tree Protection Zone(s). The Tree Protection Zone(s) must be maintained during all *development work*.
- b) Where excavation encounters tree roots with a diameter exceeding 40mm excavation must cease. The *principal contractor* must procure an inspection of the tree roots exposed by a qualified arborist. Excavation must only recommence with the implementation of the recommendations of the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.



- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.

**Note:** Trees must be pruned in accordance with Australian Standard AS 4373 – 2007 “Pruning of Amenity Trees” and Workcover NSW Code of Practice Amenity Tree Industry 1998.  
Standard Condition: E8

## E.9 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a) The following trees must be retained:

### Trees on Council Land

Council Ref. No:	Species	Location	Dimension (Metres)	Tree Value
1	<i>Citharexylum spinosum</i> Fiddlewood Tree	Council verge – Front north east	8 x 8	\$2,785.87
2	<i>Ficus microcarpa</i> var. ‘Hillii’ Hills Weeping Fig	Council verge – Front centre	15 x 16	\$22,648.74
3	<i>Lophostemon confertus</i> Brush Box	Council verge – Front west	8 x 8	\$1,793.40

**Note:** The tree trees required to be retained should appear coloured green on the construction certificate plans.

- b) The following trees may be removed:

Council Ref. No:	Species	Location	Dimension (Metres)
4	Grouping of 9 x <i>Melaleuca quinquenervia</i> Broad-leafed Paperbark	Rear – Standing on RTA property adjacent to south west corner	Average 8 x 4
5	<i>Ficus lyrata</i> Fiddle-leaf Fig	Front – Council verge	3 x 2

**Note:** The tree trees that may be removed should appear coloured red on the construction certificate plans.

- c) The following trees may be pruned in accordance with Australian Standard AS 4373 – 2007 “Pruning of Amenity Trees” and Workcover NSW Code of Practice Amenity Tree Industry, 1998 to the minimum extent necessary to provide clearance to the new development:

Council Ref. No:	Species	Location	Approved pruning specification (extent of pruning)
2	<i>Ficus microcarpa</i> var. ‘Hillii’ Hills Weeping Fig	Council verge – Front centre	Prune as required to clear new building alignment

**Note:** The tree/s required to be pruned should appear coloured blue on the construction certificate plans.

**Note:** Water Restrictions take precedence over this condition.

**Note:** Having regard to water restrictions manual hosing may be necessary.  
Standard Condition: E9

### E.10 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions.

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

### E.11 Compliance with Geotechnical/Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

**Note:** The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.  
Standard Condition: E12

### E.12 Support of adjoining land and buildings

A person must not do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

**Note:** This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

**Note:** Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the *Roads Act 1993* for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

**Note:** The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council’s care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

Standard Condition: E13

### E.13 Vibration Monitoring

Vibration monitoring equipment must be installed and maintained, under the supervision of a *professional engineer* with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the *professional engineer* as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity an audible alarm must activate such that the *principal contractor* and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately.

Prior to the vibration monitoring equipment being reset by the *professional engineer* and any further work recommencing the event must be recorded and the cause of the event identified and documented by the *professional engineer*.

Where the event requires, in the opinion of the *professional engineer*, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the *professional engineer* to the *principal contractor* and any sub-contractor clearly setting out required work practice.

The *principal contractor* and any sub-contractor must comply with all work directions, verbal or written, given by the *professional engineer*.

A copy of any written direction required by this condition must be provided to the *Principal Certifying Authority* within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the *professional engineer*, *principal contractor* and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the *professional engineer* to prevent any further damage and restore support to the *supported land*.

**Note:** *Professional engineer* has the same mean as in Clause A1.1 of the BCA.

**Note:** *Building* has the same meaning as in section 4 of the Act i.e. “**building** includes part of a building and any structure or part of a structure”.

**Note:** *Supported land* has the same meaning as in section 88K of the Conveyancing Act 1919.  
Standard Condition: E14

#### E.14 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

#### E.15 Disposal of site water during construction

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act* 1993;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act* 1997, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

**Note:** This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.  
Standard Condition: E17

## E.16 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988* (Cth).

No illuminated sign(s) must be erected upon or displayed upon any site crane.

**Note:** Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

**Note:** Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.  
Standard Condition: E19

## E.17 Check Surveys - boundary location, building location, building height and stormwater drainage system relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA*'s satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;

- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.

**Note:** This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.

Standard Condition: E20

### E.18 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.

Standard Condition: E21

### E.19 Prohibition of burning

There must be no burning of any waste or other materials. The burning of CCA (copper chrome arsenate) or PCP (pentachlorophenol) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.

**Note:** Pursuant to the *Protection of the Environment Operations (Control of Burning) Regulation 2000* all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning.

Standard Condition: E22

### E.20 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

## **E.21 Compliance with Council's Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway**

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

**Note:** A copy of Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" can be downloaded free of charge from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)  
Standard Condition: E24

## **F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

### **F.1 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building. Standard Condition: F1

### **F.2 Fire Safety Certificates**

In the case of a *final occupation certificate* to authorise a person:

- a. to commence occupation or use of a *new building*, or
- b. to commence a change of building use for an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate has been issued for the building.

In the case of an *interim occupation certificate* to authorise a person:

- a. to commence occupation or use of a partially completed *new building*, or
- b. to commence a change of building use for part of an existing building,

a *certifying authority* must be satisfied that a final fire safety certificate or an interim fire safety certificate has been issued for the relevant part of the building.

**Note:** This condition does not apply to a class 1a or class 10 building within the meaning of clause 167 of the Regulation.

**Note:** In this condition:

*interim fire safety certificate* has the same meaning as it has in Part 9 of the Regulation.

*final fire safety certificate* has the same meaning as it has in Part 9 of the Regulation.

*new building* has the same meaning as it has in section 109H of the Act.

Standard Condition: F4

### F.3 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, *Development Standards*, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

### F.4 Commissioning and Certification of Public Infrastructure Works

The *principal contractor* or *owner builder* must submit, to the satisfaction of Woollahra Municipal Council, certification from a *professional engineer* that all public infrastructure works have been executed in compliance with this consent and with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.



The certification must be supported by closed circuit television / video inspection provided on DVD of all stormwater drainage together with works as executed engineering plans and a survey report detailing all finished reduced levels.

Standard Condition: F9

### **G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

None relevant.

### **H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

#### **H.1 Landscaping**

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan, arborist report, transplant method statement and tree management plan. The *principal contractor* or *owner* must provide to PCA a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

**Note:** This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.

Standard Condition: H9

#### **H.2 Removal of Ancillary Works and Structures**

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.

Standard Condition: H12

#### **H.3 Road Works (including footpaths)**

The following works must be completed to the satisfaction of Council, in compliance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor's* or *owner's* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. new or replacement street trees;

- f. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- g. new or reinstated kerb and guttering within the *road*; and
- h. new or reinstated road surface pavement within the *road*.

**Note:** Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council's customer service centre.  
Standard Condition: H13

#### **H.4 Dilapidation Report for public infrastructure works**

To clarify the state of public infrastructure prior to the issue of the Final Occupation Certificate, the *Principal Contractor* must submit a dilapidation report, prepared by a *professional engineer*, on Council's infrastructure within and near the development site to Council.

The Final Occupation Certificate must not be issued until Council's Drainage Engineer is satisfied that the works have been satisfactorily completed and the PCA has been provided with correspondence from Council to this effect.

The dilapidation report must include:

- a. Photographs showing any existing damage to the road pavement on Saber Street,
- b. Photographs showing any existing damage to the kerb and gutter on Saber Street,
- c. Photographs showing any existing damage to the footway including footpath pavement on Saber Street,

The dilapidation report must specify (with supporting photographic/DVD evidence) the exact location and extent of any damaged or defective public infrastructure. If the required report is not submitted then Council will assume any damage to any infrastructure in the immediate vicinity of the site was caused by the principle contractor and owner carrying out work under this consent.

**Note:** If the Principal Contractor fails to submit the dilapidation report required by this condition and damage is occasioned to public assets adjoining the site Council will deduct from security any costs associated with remedying, repairing or replacing damaged public infrastructure. Nothing in this condition prevents Council making any claim against security held for this purpose.  
Standard Condition: H14

#### **H.5 Positive Covenant & Works-As-Executed certification of stormwater systems**

On completion of construction work, stormwater drainage works are to be certified by a *professional engineer* with Works-As-Executed drawings supplied to the *PCA* detailing:

- a. compliance with conditions of development consent relating to stormwater;
- b. the structural adequacy of the On-Site Detention system (OSD);
- c. that the works have been constructed in accordance with the approved design and will provide the detention storage volume and attenuation in accordance with the submitted calculations;

- d. Pipe invert levels and surface levels to Australian Height Datum; and
- e. Contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits.
- f. A positive covenant pursuant to Section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the on-site-detention system and/or absorption trenches, including any pumps and sumps incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land Titles Office.

**Note:** The required wording of the Instrument can be downloaded from Council's web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au). The PCA must supply a copy of the WAE Plans to Council together with the *Final Occupation Certificate*. The *Final Occupation Certificate* must not be issued until this condition has been satisfied.  
Standard Condition: H20

## **I. Conditions which must be satisfied during the ongoing use of the development**

### **I.1 On-going maintenance of the on-site-detention system**

The Owner(s) must in accordance with this condition and any positive covenant:

- a. permit stormwater to be temporarily detained by the system;
- b. keep the system clean and free of silt rubbish and debris;
- c. if the car park is used as a detention basin, a weather resistant sign must be maintained in a prominent position in the car park warning residents that periodic inundation of the car park may occur during heavy rain;
- d. maintain renew and repair as reasonably required from time to time the whole or part of the system so that it functions in a safe and efficient manner and in doing so complete the same within the time and in the manner reasonably specified in written notice issued by the Council;
- e. carry out the matters referred to in paragraphs (b) and (c) at the Owners expense;
- f. not make any alterations to the system or elements thereof without prior consent in writing of the Council and not interfere with the system or by its act or omission cause it to be interfered with so that it does not function or operate properly;
- g. permit the Council or its authorised agents from time to time upon giving reasonable notice (but at anytime and without notice in the case of an emergency) to enter and inspect the land with regard to compliance with the requirements of this covenant;
- h. comply with the terms of any written notice issued by Council in respect to the requirements of this clause within the time reasonably stated in the notice;
- i. where the Owner fails to comply with the Owner's obligations under this covenant, permit the Council or its agents at all times and on reasonable notice at the Owner's cost to enter the land with equipment, machinery or otherwise to carry out the works required by those obligations;
- j. indemnify the Council against all claims or actions and costs arising from those claims or actions which Council may suffer or incur in respect of the system and caused by an act or omission by the Owners in respect of the Owner's obligations under this condition.

**Reason:** This condition has been imposed to ensure that owners are aware of require maintenance requirements for their stormwater systems.

**Note:** This condition is supplementary to the owner(s) obligations and Council's rights under any positive covenant.  
Standard Condition: I12

## I.2 Annual Fire Safety Statements (Class 1b to 9c buildings inclusive)

Each year, the owner of a building to which an *essential fire safety measure* is applicable must provide an *annual fire safety statement* to Council and the Commissioner of the NSW Fire Brigades. The *annual fire safety statement* must be prominently displayed in the building.

**Note:** *Essential fire safety measure* has the same meaning as in clause 165 of the *Regulation*. *Annual fire safety statement* has the same meaning as in clause 175 of the *Regulation*. Part 9 Division 5 of the *Regulation* applies in addition to this condition at the date of this consent. Visit Council's web site for additional information in relation to fire safety [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).  
Standard Condition: I22

## I.3 Outdoor lighting – Commercial

Outdoor lighting must comply with AS 4282-1997: *Control of the obtrusive effects of outdoor lighting*. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.

**Reason:** This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.

**Note:** Council may consider, subject to an appropriate section 96 application relaxation of this condition where it can be demonstrated, by expert report, that the level of lighting in the existing area already exceeds the above criteria, where physical shielding is present or physical shielding is reasonably possible.  
Standard Condition: I43

## I.4 Outdoor lighting – Roof Terraces

Outdoor lighting must comply with AS 4282-1997: *Control of the obtrusive effects of outdoor lighting*. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.

All lighting to be installed on the roof terrace will be recessed lights or will be surface wall/balustrade mounted lights at a maximum height of 600 mm above the finished floor level of the roof terrace.

**Reason:** This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting.

**Note:** Council may consider, subject to an appropriate section 96 application relaxation of this condition where it can be demonstrated, by expert report, that the level of lighting in the existing area already exceeds the above criteria, where physical shielding is present or physical shielding is reasonably possible.  
Standard Condition: I44

## I.5 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

**Reason:** This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

Useful links:

**Community Justice Centres**—free mediation service provided by the NSW Government ([www.cjc.nsw.gov.au](http://www.cjc.nsw.gov.au)).

**Department of Environment and Conservation NSW**, Noise Policy Section web page ([www.environment.nsw.gov.au/noise](http://www.environment.nsw.gov.au/noise)).

**New South Wales Government Legislation** home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* ([www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)).

**Australian Acoustical Society**—professional society of noise-related professionals ([www.acoustics.asn.au/index.php](http://www.acoustics.asn.au/index.php)).

**Association of Australian Acoustical Consultants**—professional society of noise related professionals ([www.aaac.org.au](http://www.aaac.org.au)).

**Department of Gaming and Racing** - ([www.dgr.nsw.gov.au](http://www.dgr.nsw.gov.au)).

Standard Condition: 150

## I.6 Noise from mechanical plant and equipment

Noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

**Reason:** This condition has been imposed to protect the amenity of the neighbourhood.

**Note:** Words in this condition have the same meaning as in the:  
*NSW Industrial Noise Policy* ([http://www.environment.nsw.gov.au/resources/ind\\_noise.pdf](http://www.environment.nsw.gov.au/resources/ind_noise.pdf)) ISBN 0 7313 2715 2, dated January 2000, and  
*Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) ISBN 1741370671, dated December 2004.  
Standard Condition: 153

## J. Miscellaneous Conditions

None relevant.

## K. Advisings

### K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;

- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

### **Warnings as to potential maximum penalties**

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

### **Warning as to enforcement and legal costs**

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

## **K.2 Dial before you dig**



The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

## **K.3 Commonwealth Disability Discrimination Act 1992 (“DDA”)**

The Disability Discrimination Act 1992 (DDA) makes it against the law for public places to be inaccessible to people with a disability. Compliance with this development consent, Council's Access DCP and the BCA does not necessarily satisfy compliance with the DDA. The DDA applies to existing places as well as places under construction. Existing places must be modified and be accessible (except where this would involve "unjustifiable hardship").

Further detailed advice can be obtained from the Human Rights and Equal Opportunity Commission (“HEROC”):

- <http://www.hreoc.gov.au/index.html>
- [http://www.hreoc.gov.au/disability\\_rights/dda\\_guide/ins/ins.html](http://www.hreoc.gov.au/disability_rights/dda_guide/ins/ins.html)

If you have any further questions relating to the application of the DDA you can send an email to HEROC at [disabdis@humanrights.gov.au](mailto:disabdis@humanrights.gov.au).

Standard Advising: K3

#### **K.4 NSW Police Service and Road Closures**

The Rose Bay Local Area Command closely aligns with the boundaries of the Woollahra local government area.

Council and Police approval is required prior to a partial or full temporary road closure. If you are seeking a partial or full temporary road closure you must comply with the relevant conditions of this consent and you must also gain the approval of the Traffic Sergeant, Paddington Police Station, 16 Jersey Road, Paddington. Phone No. 02 8356 8299 or Fax No. 0283568211.

**Warning:** If you partially or fully close a road without compliance with Council and Police requirements Council Rangers or the Police can issue Penalty Infringement Notices or Court Attendance Notices leading to prosecution.  
Standard Advising: K4

#### **K.5 Builders Licences and Owner Builders Permits**

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

#### **K.6 Building Standards - Guide to Standards and Tolerances**

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8 are achieved. The quality of any development is a function of the quality of the *principal contractor’s* or *owner builder’s* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

### **K.7 Workcover requirements**

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW's website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

### **K.8 Asbestos Removal, Repair or Disturbance**

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

**Note:** The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) or one of Workcover NSW's offices for further advice.

Standard Advising: K8

### **K.9 Lead Paint**

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1–1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2–1998, Guide to Lead Paint Management—Residential and Commercial Buildings.



Industrial paints may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.

Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

Standard Advising: K9

### **K.10 Dividing Fences**

The erection of dividing fences under this consent does not affect the provisions of the *Dividing Fences Act 1991*. Council does not adjudicate civil disputes relating to the provision of, or payment for, the erection of dividing fences.

**Note:** Further information can be obtained from the NSW Department of Lands - <http://www.lands.nsw.gov.au/LandManagement/Dividing+Fences.htm>. Community Justice Centres provide a free mediation service to the community to help people resolve a wide range of disputes, including dividing fences matters. Their service is free, confidential, voluntary, timely and easy to use. Mediation sessions are conducted by two impartial, trained mediators who help people work together to reach an agreement. Over 85% of mediations result in an agreement being reached. Mediation sessions can be arranged at convenient times during the day, evening or weekends. Contact the Community Justice Centre either by phone on 1800 671 964 or at <http://www.cjc.nsw.gov.au/>.

Standard Advising: K10

### **K.11 Appeal**

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

**Mr Dimitri Lukas, Senior Assessment Officer** on (02) 9391 7159

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

### **K.12 Release of Security**

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>  
Standard Condition: K15

### **K.13 Recycling of Demolition and Building Material**

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

### **K.14 Owner Builders**

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See [www.fairtrading.nsw.gov.au](http://www.fairtrading.nsw.gov.au).

Standard Condition: K18

### **K.15 Pruning or Removing a Tree Growing on Private Property**

Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

### **K.16 Model**

If you submitted a model with the application it must be collected from the Council offices within fourteen (14) days of the date of this determination. Models not collected will be disposed of by Council.

Standard Condition: K21

**D9 DA253/2008 – 33 Coolong Road, Vaucluse – Proposed new skid & landing – 6/5/2008**

**Note:** As the voting on the Amendment was 3 votes for the Amendment and 3 votes against the Amendment, in accordance with Council's Codes and Policies, both the Motion and the Amendment are referred to Council for consideration. **(See Item R2).**

**D10 DA239/2008 - 44 Dover Road, Rose Bay – Alterations & additions – 29/4/2008**

**Note:** Late correspondence was tabled by Jennifer Turner.

**Note:** Jennifer Turner of Woollahra, objector, Peter Poland President of Woollahra History and Heritage Society, Edward Cadry representing the applicant and owner, and Terry Chevinsky Architect addressed the Committee.

**Note:** The Committee amended Condition C.1 (Modification of details of the development (s80A(1)(g) of the Act))

**(Shoebridge/Martin)**

**Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979**

THAT the Council, as the consent authority, grant development consent to Development Application No. 239/2008 for alterations and additions on land at 44 Dover Road, Rose Bay, subject to the following conditions:

**A. General Conditions****A.1 Conditions**

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 ("the *Act*") and the provisions of the Environmental Planning and Assessment Regulation 2000 ("the *Regulation*") such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

**A.2 Definitions**

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

*Applicant* means the applicant for this Consent.

*Approved Plans* mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

*AS* or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

*BCA* means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

*Council* means Woollahra Municipal Council

*Court* means the Land and Environment Court

*Local native plants* means species of native plant endemic to Sydney's eastern suburbs (see the brochure titled "Local Native Plants for Sydney's Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

*Stormwater Drainage System* means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

*Owner* means the owner of the *site* and successors in title to the *site*.

*Owner Builder* has the same meaning as in the *Home Building Act 1989*.

*PCA* means the *Principal Certifying Authority* under the *Act*.

*Principal Contractor* has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

*Professional Engineer* has the same meaning as in the *BCA*.

*Public Place* has the same meaning as in the *Local Government Act 1993*.

*Road* has the same mean as in the *Roads Act 1993*.

*SEE* means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

*Site* means the land being developed subject to this consent.

*WLEP 1995* means *Woollahra Local Environmental Plan 1995*

*Work* for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or

- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

**Note: Interpretation of Conditions** - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.  
Standard Condition: A2

### A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
5046 pages 2-7	Architectural Plans		
A31506	BASIX Certificate	Department of Planning	31/03/08
	Arborist Report	Apex	16/05/08

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

### A.4 Ancillary Aspect of the Development (s80A(2) of the Act)

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's “Specification for Roadworks, Drainage and Miscellaneous Works” dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

**Note:** This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.  
Standard Condition: A8

### A.5 Prescribed Conditions

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

**Note:** It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at [www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)  
Standard Condition: A30

## B. Conditions which must be satisfied prior to the demolition of any building or construction

## B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

**Note:** See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.  
Standard Condition: B1

## B.2 Establishment of Tree Protection Zones

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

a) Tree Protection Zone areas

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
1	<i>Lophostemon confertus</i> (Brushbox)	Council nature strip- front of property	2 metres
6	<i>Eucalyptus viminalis</i>	Rear	1 metre

**\*NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.

c) Trunk protection, to a maximum height permitted by the first branches, is to be installed around the trunks of the trees listed in the table below;

Council Reference No:	Species	Location
1	<i>Lophostemon confertus</i> (Brushbox)	Council nature strip- front of property

A padding material eg. Hessian or thick carpet underlay, is to be wrapt around the trunk first. Harwood planks, 50x100mm and to the maximum possible length, are to be placed over the padding and around the trunk of the tree at 150mm centres. These planks are to be secured in place by 8 gauge wire at 300mm spacing.

d) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.

- e) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- f) Sediment control measures are to be installed around all Tree Protection Zones to protect the existing soil levels.
- g) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

## **C. Conditions which must be satisfied prior to the issue of any construction certificate**

### **C.1 Modification of details of the development (s80A(1)(g) of the Act)**

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. to ensure the proposal does not unreasonably impact upon the streetscape or the uniformity of the pair of semi detached dwellings, bedroom three which is located to the front of the first floor addition shall be deleted
- b. to ensure the proposal does not unreasonably impact upon the streetscape or the uniformity of the pair of semi detached dwellings, the proposed; carport, concrete crossover, paving and alterations to the front boundary wall shall be deleted; and
- c. to ensure the proposal does not encroach upon any land outside of the subject site and without the adjacent land owner's consent, the existing chimney shall be retained; and
- d. to ensure the proposal does not unreasonably impact upon the visual privacy of the neighbouring properties, the first floor windows to the south eastern elevation shall be translucent glazed and fixed to a height of 1.7m above first floor level; and
- e. to ensure the proposal does not unreasonably impact upon the visual or acoustic privacy of the neighbouring properties, a 1.7m high privacy screen shall be inserted to the south eastern side of the proposed rear balcony
- f. to ensure the first floor level rear balcony does not unreasonably impact on the visual and acoustic privacy of neighbouring properties, the first floor level rear deck is to be reduced in depth by 0.5m; from 1.5m, as proposed, to 1m

**Note:** The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

**Note:** Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

**Note:** Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

## C.2 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> Use Calculator: <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation or use their online calculator	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit -</b> Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$9,700.00	No	T115
<b>Tree Damage Security Deposit –</b> Making good any damage caused to any public tree as a consequence of the doing of anything to which the consent relates.	\$6000	No	T114
<b>DEVELOPMENT LEVY</b> under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy (S94A)	\$3,846.04 + Index Amount	Yes, quarterly	T96
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Public Tree Management Inspection Fee	\$160.00	No	T95
Public Road and Footpath Infrastructure Inspection Fee	\$363.25	No	T45
Security Administration Fee	\$168.00	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>		\$20,237.29	<b>Plus any relevant indexed amounts and long service levy</b>

### Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act*, 1986, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.



**Note:** The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

#### **How must the payments be made?**

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

#### **How will the section 94A levy be indexed?**

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

#### **Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

#### **Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and

- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

### C.3 BASIX commitments

The *applicant* must submit to the *Certifying Authority BASIX Certificate* No. A31506 with any application for a *Construction Certificate*.

**Note:** Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

**Note:** Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"

Standard Condition: C7

### C.4 Road and Public Domain Works – Council approval required

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*.

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

**Note:** When a large *Roads Act* is required, then four (4) weeks is to be allowed for assessment.

**Note:** *Road* has the same meaning as in the *Roads Act 1993*.

**Note:** The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

### C.5 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

**Note:** This condition has been imposed to eliminate potential water pollution and dust nuisance.

**Note:** The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

**Note:** The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/> .

**Note:** Pursuant to clause 161(1)(a)(5) of the *Regulation* an *Accredited Certifier* may satisfied as to this matter.  
Standard Condition: C25

### C.6 Tree Management Details

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation* must, show the following information;

- a. trees to be numbered in accordance with these conditions,
- b. shaded green where required to be protected and retained,
- c. shaded yellow where required to be transplanted,
- d. shaded blue where required to be pruned,
- e. shaded red where authorised to be removed and,
- f. references to applicable tree management plan, arborists report, transplant method statement or bush regeneration management plan.

Standard Condition: C30

### C.7 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

**Note:** This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.  
Standard Condition: C35

### C.8 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged Construction Certificates  
Standard Condition: C36

### C.9 Stormwater management plan (Clause 25(2) WLEP 1995)

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include a *Stormwater Management Plan* for the site.

The *Stormwater Management Plan* must detail:

- a) General design in accordance with Stormwater disposal concept plan prepared by Cape Cod Australia P/L other than amended by this and other conditions;
- b) The discharge of stormwater, by direct connection, to K&G;
- c) Compliance the objectives and performance requirements of the BCA;
- d) Any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- e) General compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004)

The *Stormwater Management Plan* must include the following specific requirements:

#### Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off, 1987* edition or most current version thereof.

It must include:

- All pipe layouts, dimensions, grades, lengths and material specification,
- All invert levels reduced to Australian Height Datum (AHD),
- Location and dimensions of all drainage pits,
- Point and method of connection to Councils drainage infrastructure.

Subsoil Drainage - Subsoil drainage details, clean out points, discharge point.

**Note:** This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

**D. Conditions which must be satisfied prior to the commencement of any development work****D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),  
or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.  
Standard Condition: D1

**D.2 Site Signs**

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
  - a. showing the name, address and telephone number of the principal certifying authority for the work, and
  - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
  - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.

4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws."

**Note:** *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

**Note:** If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.  
Standard Condition: D12

### D.3 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

**accredited sewage management facility** means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

**approved by the council** means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

**public sewer** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**sewage management facility** has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

**Note:** This condition does not set aside the requirement to comply with Workcover NSW requirements.  
Standard Condition: D13

### D.4 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (‘The Blue Book’).

Where there is any conflict The Blue Book takes precedence.

**Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

**Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

**Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”  
**Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

Standard Condition: D14

#### **D.5 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and

- iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.

Standard Condition: D15

#### **D.6 Notification of Home Building Act 1989 requirements**

- a. For the purposes of section 80A (11) of the *Act*, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
  - i. in the case of work for which a *principal contractor* is required to be appointed:
    - the name and licence number of the principal contractor, and
    - the name of the insurer by which the work is insured under Part 6 of that *Act*,
  - ii. in the case of work to be done by an owner-builder:
    - the name of the owner-builder, and
    - if the owner-builder is required to hold an owner-builder permit under that *Act*, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State's building laws.

Standard Condition: D17



## **E. Conditions which must be satisfied during any development work**

### **E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989**

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

### **E.2 Compliance with Australian Standard for Demolition**

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

### **E.3 Requirement to notify about new evidence**

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

### **E.4 Critical Stage Inspections**

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

**Note:** The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

**Note:** The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

### **E.5 Hours of Work –Amenity of the neighbourhood**

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm> .

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

### **E.6 Maintenance of Vehicular and Pedestrian Safety and Access**

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.

- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road used as a footway.  
Standard Condition: E7

## E.7 Tree Preservation

All persons must comply with Council’s *Tree Preservation Order* (“the TPO”), other than where varied by this consent. The order applies to any tree, with a height greater than 5 metres or a diameter spread of branches greater than 3 metres, is subject to Council’s Tree Preservation Order unless, exempted by specific provisions. Works to be carried out within a 5 metre radius of any tree, subject to the Tree Preservation Order, require the prior written consent of Council.

### General Protection Requirements:

- a) There must be no excavation or *work* within the required Tree Protection Zone(s). The Tree Protection Zone(s) must be maintained during all *development work*.

- b) Where excavation encounters tree roots with a diameter exceeding 50mm excavation must cease. The *principal contractor* must procure an inspection of the tree roots exposed by a qualified arborist. Excavation must only recommence with the implementation of the recommendations of the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.
- c) Where there is damage to any part of a tree the *principal contractor* must procure an inspection of the tree by a qualified arborist immediately. The *principal contractor* must immediately implement treatment as directed by the qualified arborist or where specific instructions are given by Council's Tree Management Officer in strict accordance with such Council instructions.

**Note:** Trees must be pruned in accordance with Australian Standard AS 4373 – 2007 “Pruning of Amenity Trees” and Workcover NSW Code of Practice Amenity Tree Industry 1998.  
Standard Condition: E8

## E.8 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a) The following trees must be retained:

### Trees on Private Land

Council Reference No:	Species	Location	Dimension (Metres)
2	<i>Gordonia axillaris</i> (Fried Egg Plant)	Front yard	5 x 2 metres
3	<i>Camellia sasanqua</i> (Camellia)	Front yard	4 x 2 metres
4	<i>Lagerstroemia indica</i> (Crepe Myrtle)	Front yard	5 x 2 metres
5	<i>Persea americana</i> (Avocado)	Eastern boundary	6 x 3 metres
6	<i>Eucalyptus viminalis</i>	Rear	5 x 2 metres

### Trees on Council Land

Council Reference No:	Species	Location	Dimension (Metres)	Tree Value
1	<i>Lophostemon confertus</i> (Brushbox)	Council nature strip	8 x 5metres	\$6000

**Note:** The tree trees required to be retained should appear coloured green on the construction certificate plans.

## E.9 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions;

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## E.10 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988* (Cth).

No illuminated sign(s) must be erected upon or displayed upon any site crane.

**Note:** Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

**Note:** Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments. Standard Condition: E19

## E.11 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

## E.12 Prohibition of burning

There must be no burning of any waste or other materials. The burning of CCA (copper chrome arsenate) or PCP (pentachlorophenol) treated timber is prohibited in all parts of NSW. All burning is prohibited in the Woollahra local government area.

**Note:** Pursuant to the *Protection of the Environment Operations (Control of Burning) Regulation 2000* all burning (including burning of vegetation and domestic waste) is prohibited except with approval. No approval is granted under this consent for any burning.  
Standard Condition: E22

### E.13 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

### E.14 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

### **E.15 Disposal of site water during construction**

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act* 1993;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act* 1997, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

**Note:** This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.

Standard Condition: E17

### **E.16 Compliance with Council’s Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway**

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act* 1993 or *Local Government Act* 1993 for works within Roads and other public places.

**Note:** A copy of Council’s “*Specification for Roadworks, Drainage and Miscellaneous Works*” can be downloaded free of charge from Council’s website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au)

Standard Condition: E24

## **F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

### **F.1 Occupation Certificate (section 109M of the Act)**

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

**Note:** New building includes an altered portion of, or an extension to, an existing building.  
Standard Condition: F1

## **F.2 Commissioning and Certification of Systems and Works**

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, *Development Standards*, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

## **G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

No relevant conditions apply.

## **H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

### **H.1 Fulfillment of BASIX commitments – Clause 154B of the Regulation**

All BASIX commitments must be effected in accordance with the BASIX Certificate No. A31506.



**Note:** Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled." Standard Condition: H7

## H.2 Removal of Ancillary Works and Structures

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H12

## H.3 Road Works (including footpaths)

The following works must be completed to the satisfaction of Council, in compliance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor's* or *owner's* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. new or replacement street trees;
- f. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- g. new or reinstated kerb and guttering within the *road*; and
- h. new or reinstated road surface pavement within the *road*.

**Note:** Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council's customer service centre.  
Standard Condition: H13

## I. Conditions which must be satisfied during the ongoing use of the development

### I.1 Maintenance of BASIX commitments

All BASIX commitments must be maintained in accordance with the BASIX Certificate No. A31506.

**Note:** This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.  
Standard Condition: I7

## J. Miscellaneous Conditions

No relevant conditions

## K. Advising

### K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

#### Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

#### Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order. This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

### K.2 Dial before you dig



The *principal contractor, owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

### **K.3 Commonwealth Disability Discrimination Act 1992 (“DDA”)**

The Disability Discrimination Act 1992 (DDA) makes it against the law for public places to be inaccessible to people with a disability. Compliance with this development consent, Council’s Access DCP and the BCA does not necessarily satisfy compliance with the DDA.

The DDA applies to existing places as well as places under construction. Existing places must be modified and be accessible (except where this would involve "unjustifiable hardship").

Further detailed advice can be obtained from the Human Rights and Equal Opportunity Commission (“HEROC”):

- <http://www.hreoc.gov.au/index.html>
- [http://www.hreoc.gov.au/disability\\_rights/dda\\_guide/ins/ins.html](http://www.hreoc.gov.au/disability_rights/dda_guide/ins/ins.html)

If you have any further questions relating to the application of the DDA you can send an email to HEROC at [disabdis@humanrights.gov.au](mailto:disabdis@humanrights.gov.au).

Standard Advising: K3

### **K.4 Builders Licences and Owner Builders Permits**

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

### **K.5 Building Standards - Guide to Standards and Tolerances**

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor’s* or *owner builder’s* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

## K.6 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW’s website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

## K.7 Asbestos Removal, Repair or Disturbance

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/> ]; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

**Note:** The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) or one of Workcover NSW’s offices for further advice.

Standard Advising: K8

## K.8 Lead Paint

It is beyond the scope of this consent to provide detailed information about dealing with lead paint. Painters working in an area containing lead-based paint should refer to Australian Standard AS 4361.1–1995, Guide to Lead Paint Management—Industrial Applications, or AS 4361.2–1998, Guide to Lead Paint Management—Residential and Commercial Buildings.

Industrial paints may contain lead. Lead is used in some specialised sign-writing and artist paints, and road marking paints, and anti-corrosive paints. Lead was a major ingredient in commercial and residential paints from the late 1800s to 1970. Most Australian commercial buildings and residential homes built before 1970 contain lead paint. These paints were used both inside and outside buildings.

Lead hazards - Lead particles are released when old lead paint flakes and peels and collects as dust in ceiling, wall and floor voids. If dust is generated it must be contained. If runoff contains lead particles it must be contained. Lead is extremely hazardous, and stripping of lead-based paint and the disposal of contaminated waste must be carried out with all care. Lead is a cumulative poison and even small levels in the body can have severe effects.

Standard Advising: K9

## **K.9 Appeal**

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

**Eleanor Smith, Assessment Officer** on (02) 9391 7090

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

## **K.10 Release of Security**

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>  
Standard Condition: K15

### **K.11 Recycling of Demolition and Building Material**

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

### **K.12 Owner Builders**

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See [www.fairtrading.nsw.gov.au](http://www.fairtrading.nsw.gov.au).

Standard Condition: K18

### **K.13 Pruning or Removing a Tree Growing on Private Property**

Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

---

## **D11 Register of Current Land and Environment Court Appeals for Development Applications**

**Note:** Item R1 (7-9 Conway Avenue, Rose Bay) was dealt with prior to Item D11 (Register of Current Land and Environment Court Appeals for Development Applications).

**(Shoebridge/Dawson)**

**Resolved:**

THAT the attached register of current Land and Environment Court Appeals for Development Applications be received and noted.

---

**Items with Recommendations from this Committee  
Submitted to the Council for Decision (Items R1 to R2)**

---

**R1 DA628/2007 – 7-9 Conway Avenue, Rose Bay – Demolition of two existing dwelling-houses & ancillary structures, consolidation of the (2) allotments & construction of new residential flat building containing (6) units incorporating a roof terrace & basement level parking for (15) vehicles, new swimming pool, landscaping & siteworks – 27/9/2007**

**Note:** Item R1 (7-9 Conway Avenue, Rose Bay) was dealt with prior to Item D11 (Register of Current Land and Environment Court Appeals for Development Applications).

**Note:** Late correspondence was tabled by David Waghorn Council's Acting Team Leader and Eugene Shaw.

**Note:** Mr Benson on behalf of the owners corporation, objector, Eugene Shaw of Conway Properties addressed the Committee.

**Motion moved by Councillor Shoebridge  
Seconded by Councillor Excell**

THAT the Council, as the consent authority, refuse Development Application No. 628/2007 for the demolition of two existing dwelling-houses and ancillary structures, the consolidation of the two (2) allotments and the construction of a new residential flat building containing six (6) units incorporating a roof terrace and basement level parking for fifteen (15) vehicles, new swimming pool, landscaping and siteworks on land at 7-9 Conway Avenue, Rose Bay for the reasons as outlined in the Recommendation of the Development Control Committee Meeting of the 7 July 2008.

**Amendment moved by Councillor Gardner**

THAT the following additional reasons be included in the reasons for refusal:

1. That excavation down to 6 metres within 1.5metres from the side boundary is considered to be excessive and outside the proposed footprint.
2. Excessive roof terracing will have negative amenity impacts on adjoining properties.

**The Amendment was put and carried.  
The Amendment became part of the motion.  
The motion was put and carried.**

**(Shoebridge/Excell)**

**Recommendation:**

THAT the Council, as the consent authority, refuse Development Application No. 628/2007 for the demolition of two existing dwelling-houses and ancillary structures, the consolidation of the two (2) allotments and the construction of a new residential flat building containing six (6) units incorporating a roof terrace and basement level parking for fifteen (15) vehicles, new swimming pool, landscaping and siteworks on land at 7-9 Conway Avenue, Rose Bay for the following reasons:

1. The development fails to comply with the provisions of Clause 25 (2) of WLEP 1995 in relation to stormwater disposal.
2. The development does not comply with Council's front setback control as prescribed under WRDCP 2003 and results in significant view loss from Nos 1-3 & 5 Conway Avenue, Rose Bay.
3. The development does not comply with Council's deep soil landscaped area at the frontage control as prescribed under WRDCP 2003 thereby reducing the future amenity of landscaping within the Municipality.
4. The development does not comply with Council's rear setback control as prescribed under WRDCP 2003 which results in excessive loss of vegetation and views.
5. The development does not comply with Council's number of storeys control as prescribed under WRDCP 2003 including by inappropriate excavation to the rear which together result in excessive loss of mature plantings and negative privacy, bulk and scale impacts.
7. The development does not comply with Council's articulated wall length (to the street) control as prescribed under WRDCP 2003.
8. That excavation down to 6 metres within 1.5metres from the side boundary is considered to be excessive and outside the proposed footprint.
9. Excessive roof terracing will have negative amenity impacts on adjoining properties.

---

**R2 DA253/2008 – 33 Coolong Road, Vaucluse – Proposed new skid & landing – 6/5/2008**

**Note:** As the voting on the Amendment was 3 votes for the Amendment and 3 votes against the Amendment, in accordance with Council's Codes and Policies, both the Motion and the Amendment are referred to Council for consideration.

**Note:** Late correspondence was tabled by Caroline Owen Council's Assessment Officer.

**Note:** Michael Helazky on behalf of the owner and applicant addressed the Committee.

**Motion moved by Councillor Martin  
Seconded by Councillor Dawson**

THAT the Council, as the consent authority, is of the opinion that the objection under *State Environmental Planning Policy No. 1 – Development Standards* to Foreshore Building Lines – development standard under Clause 22 of the WLEP 1995, is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the proposed works would be minor and would not have any negative impacts on the natural ecology or on adjoining properties.

**AND**



THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 253/2008 is consistent with the aims of the Policy, grant development consent to DA No. 253/2008 for dwelling house on land at 33 Coolong Road Vaucluse, subject to the relevant standard conditions and the following special conditions:

## A. General Conditions

### A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

### A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act* 1987 as in force at the date of consent.

*Applicant* means the applicant for this Consent.

*Approved Plans* mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

*AS* or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

*BCA* means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

*Council* means Woollahra Municipal Council

*Court* means the Land and Environment Court

*Local native plants* means species of native plant endemic to Sydney’s eastern suburbs (see the brochure titled “Local Native Plants for Sydney’s Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

*Stormwater Drainage System* means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

*Owner* means the owner of the *site* and successors in title to the *site*.

*Owner Builder* has the same meaning as in the *Home Building Act* 1989.

*PCA* means the *Principal Certifying Authority* under the *Act*.

*Principal Contractor* has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

*Professional Engineer* has the same meaning as in the *BCA*.

*Public Place* has the same meaning as in the *Local Government Act 1993*.

*Road* has the same mean as in the *Roads Act 1993*.

*SEE* means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

*Site* means the land being developed subject to this consent.

*WLEP 1995* means *Woollahra Local Environmental Plan 1995*

*Work* for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piling, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

**Note: Interpretation of Conditions** - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.  
Standard Condition: A2

### A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
07/BM/01 & 07/BM/02 both revision 2	Architectural Plans	Waterlink Pty Ltd	30/11/07

**Note:** Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

**Note:** These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)  
Standard Condition: A5

#### **A.4 Prescribed Conditions**

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

**Note:** It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at [www.legislation.nsw.gov.au](http://www.legislation.nsw.gov.au)  
Standard Condition: A30

### **B. Conditions which must be satisfied prior to the demolition of any building or construction**

#### **B.1 Construction Certificate required prior to any demolition**

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the *Act*. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a *Construction Certificate*, appointment of a PCA and *Notice of Commencement* under the *Act*.

**Note:** See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.  
Standard Condition: B1

### **C. Conditions which must be satisfied prior to the issue of any construction certificate**

#### **C.1 Professional Engineering Details**

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

**Note:** This does not affect the right of the developer to seek staged *Construction Certificates*  
Standard Condition: C36

#### **C.2 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)**

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
<b>LONG SERVICE LEVY</b> under Building and Construction Industry Long Service Payments Act 1986			
<b>Long Service Levy</b> Use Calculator: <a href="http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm">http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm</a>	Contact LSL Corporation or use their online calculator	No	
<b>SECURITY</b> under section 80A(6) of the Environmental Planning and Assessment Act 1979			
<b>Property Damage Security Deposit -</b> Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$2,000.00	No	T115
<b>DEVELOPMENT LEVY</b> under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website <a href="http://www.woollahra.nsw.gov.au">www.woollahra.nsw.gov.au</a> .			
Development Levy (S94A)	\$0	Yes, quarterly	T96
<b>INSPECTION FEES</b> under section 608 of the Local Government Act 1993			
Security Administration Fee	\$168	No	T16
<b>TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES</b>		\$2,168.00	<b>Plus any relevant indexed amounts and long service levy</b>

### Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

**Note:** The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

#### How must the payments be made?

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;

- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

**How will the section 94A levy be indexed?**

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

**Do you need HELP indexing the levy?**

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

**Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005**

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

**D. Conditions which must be satisfied prior to the commencement of any development work**

### D.1 Adjoining buildings founded on loose foundation materials

The *principal contractor* must ensure that a *professional engineer* determines the possibility of any adjoining buildings founded on loose foundation materials being affected by piling, piers or excavation. The *professional engineer* (geotechnical consultant) must assess the requirements for underpinning any adjoining or adjacent buildings founded on such soil on a case by case basis and the *principal contractor* must comply with any reasonable direction of the *professional engineer*.

**Note:** A failure by contractors to adequately assess and seek professional engineering (geotechnical) advice to ensure that appropriate underpinning and support to adjoining land is maintained prior to commencement may result in damage to adjoining land and buildings. Such contractors are likely to be held responsible for any damages arising from the removal of any support to supported land as defined by section 177 of the *Conveyancing Act 1919*.

Standard Condition: D6

### D.2 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),
- or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

**Note:** This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the *Home Building Act 1989*. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.

Standard Condition: D1

### D.3 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (“The Blue Book”).

Where there is any conflict The Blue Book takes precedence.

**Note:** The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

**Note:** The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be downloaded free of charge from [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au).

**Note:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

**Note:** Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution” **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

Standard Condition: D14

#### **D.4 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)**

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
  - i. appointed a principal certifying authority for the building work, and
  - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
  - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
  - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
  - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
  - ii. notified the principal certifying authority of any such appointment, and
  - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
  - iv. given at least 2 days’ notice to the council of the person’s intention to commence the erection of the building.

**Note:** *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

**Note:** *new building* has the same meaning as in section 109H of the Act and includes an altered portion of, or an extension to, an existing building.

**Note:** The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the Act (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

**Note:** *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) .

**Note:** It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the Act.  
Standard Condition: D15

#### D.5 Notification of Home Building Act 1989 requirements

- a. For the purposes of section 80A (11) of the Act, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
  - i. in the case of work for which a *principal contractor* is required to be appointed:
    - the name and licence number of the principal contractor, and
    - the name of the insurer by which the work is insured under Part 6 of that Act,
  - ii. in the case of work to be done by an owner-builder:
    - the name of the owner-builder, and
    - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.  
Standard Condition: D17



## E. Conditions which must be satisfied during any development work

### E.1 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

### E.2 Support of adjoining land and buildings

A person must not do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

**Note:** This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

**Note:** Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

**Note:** Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

**Note:** The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council’s care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

Standard Condition: E13

### E.3 Requirement to notify about new evidence

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

### E.4 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

**Note:** The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

**Note:** The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.  
Standard Condition: E5

### **E.5 Hours of Work –Amenity of the neighbourhood**

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

**Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

**Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

**Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

**Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

**Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.

**Note:** see [http://www.epa.nsw.gov.au/resources/ci\\_build\\_sheet7.pdf](http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf)  
Standard Condition: E6

### **E.6 Maintenance of Vehicular and Pedestrian Safety and Access**

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

**Note:** Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

**Note:** Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.  
Standard Condition: E7

## **E.7 Maintenance of Environmental Controls**

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,

- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions;

**Note 1:** See [http://www.epa.nsw.gov.au/small\\_business/builders.htm](http://www.epa.nsw.gov.au/small_business/builders.htm) for additional information.  
Standard Condition: E11

## E.8 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



**Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

**Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.  
Standard Condition: E15

## E.9 Check Surveys - boundary location, building location, building height and stormwater drainage system relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA*'s satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;

- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.

**Note:** This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.  
Standard Condition: E20

### E.10 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

**Note:** Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.  
Standard Condition: E21

### E.11 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

**Note 1:** “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site [www.woollahra.nsw.gov.au](http://www.woollahra.nsw.gov.au) or obtained from Council’s office.

**Note 2:** Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from [www.workcover.nsw.gov.au](http://www.workcover.nsw.gov.au) and [www.epa.nsw.gov.au](http://www.epa.nsw.gov.au) . Other specific condition and advice may apply.

**Note 3:** Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.  
Standard Condition: E23

**F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)**

**F.1 Commissioning and Certification of Systems and Works**

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

**Note:** This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

**Note:** The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, *Development Standards*, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

**Note:** The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.  
Standard Condition: F7

**G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate**

No relevant conditions.

**H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))**

## H.1 Removal of Ancillary Works and Structures

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

**Note:** This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.  
Standard Condition: H12

## I. Conditions which must be satisfied during the ongoing use of the development

### I.1 Storage

Nothing is to be stored above or below the proposed skid and deck.

## J. Miscellaneous Conditions

No relevant conditions.

## K. Advisings

### K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

#### Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

#### Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order. This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

**Note:** The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of the *Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's [www.agd.nsw.gov.au](http://www.agd.nsw.gov.au).

Standard Advising: K1

## K.2 Dial before you dig



The *principal contractor*, *owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit [www.dialbeforeyoudig.com.au](http://www.dialbeforeyoudig.com.au).

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

## K.3 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder): <http://www.dft.nsw.gov.au/building.html>.

**The Owner(s) must appoint the PCA.** The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

## K.4 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.



The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

## K.5 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

**Note:** Further information can be obtained from Workcover NSW’s website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

## K.6 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

**Caroline Owen, Assessment Officer** on (02) 9391 7150

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

## K.7 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council’s requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council’s requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

**Note:** The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>  
Standard Condition: K15

### **K.8 Recycling of Demolition and Building Material**

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

### **K.9 Owner Builders**

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See [www.fairtrading.nsw.gov.au](http://www.fairtrading.nsw.gov.au).

Standard Condition: K18

### **K.10 Compliance with the Building Code of Australia**

Preliminary assessment of the development application drawings indicates that the proposal may not comply with the following sections/parts of the *Building Code of Australia*:

Part 3.3.4 - Weatherproofing of masonry

Part 3.4.1 - Sub floor ventilation

Part 3.7 - Fire safety

Part 3.7.1 Fire separation

Part 3.7.2 Smoke alarms

Part 3.7.3 Heating appliances

Part 3.8 - Health and amenity

Part 3.8.1 Wet areas

Part 3.8.3 Facilities

Part 3.8.4 Light

Part 3.8.5 Ventilation

Part 3.8.6 Sound insulation

- Part 3.9 - Safe movement and access
  - Part 3.9.1 Stair construction
  - Part 3.9.2 Balustrades
  - Part 3.9.3 Pool access

**Note:** There must be no removal of heritage building fabric unless expressly authorised under this consent where compliance with the BCA cannot be achieved without work not authorised under this consent application to amend this consent is required.

Standard Condition: K20 (Autotext KK20)

## **K.11 Construction Approval**

You should also be aware that if the Consent Authority grants Development Consent for the proposal, works on the NSW Maritime's land must not commence unless:

- a) there is a land tenure agreement in place which is suitable to NSW Maritime; and
- b) (if proposal is below the MHW in Port Sydney) NSW Maritime has issued Construction Approval pursuant to clause 65A of the Management of Water and Waterside Lands Regulation – NSW.

### **Amendment moved by Councillor Shoebridge Seconded by Councillor Gardner**

THAT the Council, refuse Development Application No. 253/2008 for dwelling house on land at 33 Coolong Road Vaucuse for the following reasons:

- Unacceptable loss of natural rock form
- Unacceptable impact on views from the harbour
- Unacceptable overshadowing of natural rock form
- Unacceptable waterscape impacts

**The amendment was put.**

**As the voting on the Amendment was 3 votes for the Amendment and 3 votes against the Amendment, both the Motion and the Amendment are referred to Council for consideration.**

---

There being no further business the meeting concluded at 9.46pm.

*We certify that the pages numbered 2392 to 2578 inclusive are the Minutes of the Development Control Committee Meeting held on 4 August 2008 and confirmed by the Development Control Committee on 18 August 2008 as correct.*

---

**Chairperson**

---

**Secretary of Committee**