

Development Control Committee Minutes

Monday 7 April 2008

TABLE OF CONTENTS

D1	Confirmation of Minutes of Meeting held on 17 March 2008	993
D2	DA704/2007 – 7 Bulkara Road, Bellevue Hill – New dwelling with swimming pool – 30/10/2007	993
D3	DA739/2007 – 1/17A Cooper Park Road, Bellevue Hill – Alterations including extension of courtyard, new landscaping & new fencing – 14/11/2007.....	1031
D4	DA606/2005 Part 2 – 54 Kings Road, Vaucluse – Section 96 Application – Proposed modification addition of plant room & addition of louvered openings – 12/9/2007 - (See Item R1)	1032
D5	DA318/2005 Part 2 – 41 Cascade Street, Paddington - Section 96 Application – Proposed modification including modifications to balcony to the rear, reconstruction of shed, deletion of rear deck & modification to rear courtyard layout – 11/1/2008 - (See Item R2)	1032
D6	DA236/2007 – 794-796 New South Head Road, Rose Bay (Kambala School) – Change of use from the existing DA consent (511/2004) for school boarding & dining facilities to an Early Learning Centre (ELC) with internal & minor external alterations to Council approved plans (building envelope) – 17/4/2007	1032
D7	DA442/2007 – 22A Tivoli Avenue, Rose Bay – Alterations & additions to existing dwelling-house, swimming pool & pool terrace – Landscaping works – 5/7/2007	1065
D8	DA476/2007 – 1 St Michaels Place, Vaucluse – Section 82A Review of Refusal – 2/11/2007	1095
D9	DA1/2007 – 129 Hopetoun Avenue, Vaucluse – Demolition of existing residential flat building & construction of new residential flat building including basement parking, new swimming pool, landscaping & site works – 2/1/2007.....	1104
D10	Register of Current Land and Environment Court Appeals for Development Applications	1105
R1	DA606/2005 Part 2 – 54 Kings Road, Vaucluse – Section 96 Application – Proposed modification addition of plant room & addition of louvered openings – 12/9/2007	1105
R2	DA318/2005 Part 2 – 41 Cascade Street, Paddington - Section 96 Application – Proposed modification including modifications to balcony to the rear, reconstruction of shed, deletion of rear deck & modification to rear courtyard layout – 11/1/2008	1106

Development Control Committee Minutes

**Minutes of the Meeting held on
Monday 7 April 2008 at 6.00pm**

Present: His Worship The Mayor, Councillor Geoff Rundle, ex-officio (Items D6 to D10)

Councillors Keri Huxley (Chair)
 Christopher Dawson
 Tanya Excell
 Wilhelmina Gardner
 Julian Martin (Items D2 to D10)
 Isabelle Shapiro
 David Shoebridge

Staff: Patrick Robinson (Manager – Development Control)
 Nick Economou (Team Leader)
 George Fotis (Team Leader)
 Mark Schofield (Team Leader)
 Les Windle (Manager – Governance)
 Helen Tola (Team Leader – Governance)

Session One: 6.00pm to 8.45pm
Session Two: 9.03pm to 10.05pm

Also in Attendance: Nil

Leave of Absence

Leave of Absence previously granted by Council: Nil.

Apologies: Nil.

Late Correspondence

Late correspondence was submitted to the committee in relation to Items: D2, D3, D4, D5 & D9

Declarations of Interest

Councillor Huxley advised the committee that Councillor Petrie declared a pecuniary interest in Item D3 (1/17A Cooper Park Road, Bellevue Hill) as he is the co-owner of the property. Councillor Petrie was not present at the meeting.

Items Decided by this Committee using its Delegated Authority (Items D1 to D10)

Item No: D1 Delegated to Committee
Subject: **Confirmation of Minutes of Meeting held on 17 March 2008**
Author: Les Windle, Manager - Governance
File No: See Council Minutes
Reason for Report: The Minutes of the Meeting of Monday 17 March 2008 were previously circulated. In accordance with the guidelines for Committees' operations it is now necessary that those Minutes be formally taken as read and confirmed.

(Gardner/Shapiro)

Resolved:

THAT the Minutes of the Development Control Committee Meeting of 17 March 2008 be taken as read and confirmed.

D2 DA704/2007 – 7 Bulkara Road, Bellevue Hill – New dwelling with swimming pool – 30/10/2007

Note: Late correspondence was tabled by Mark Schofield Council's Team Leader & Julie Claridge.

Note: Brett Brown of Ingham Planning, Paul Oppenheim of Bellevue Hill, objectors, Keri Series and Andrew Darrick Town Planners and Steven Loulos MCK Architects addressed the Committee.

Note: The Committee amended Condition Nos. B.3 (Tree Preservation & Approved Landscaping Works) and C.1 (Modification of details of the development (s80A(1)(g) of the Act).

Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979

THAT the Council, as the consent authority, grant development consent to Development Application No. 704/2007 for a new dwelling with swimming pool on land at 7 Bulkara Road Bellevue Hill, subject to the following conditions:

A. General Conditions

A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 ("the *Act*") and the provisions of the Environmental Planning and Assessment Regulation 2000 ("the *Regulation*") such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

Applicant means the applicant for this Consent.

Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

AS or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

BCA means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

Council means Woollahra Municipal Council

Court means the Land and Environment Court

Local native plants means species of native plant endemic to Sydney's eastern suburbs (see the brochure titled "Local Native Plants for Sydney's Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

Stormwater Drainage System means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

Owner means the owner of the *site* and successors in title to the *site*.

Owner Builder has the same meaning as in the *Home Building Act 1989*.

PCA means the *Principal Certifying Authority* under the *Act*.

Principal Contractor has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

Professional Engineer has the same meaning as in the *BCA*.

Public Place has the same meaning as in the *Local Government Act 1993*.

Road has the same mean as in the *Roads Act 1993*.

SEE means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

Site means the land being developed subject to this consent.

WLEP 1995 means *Woollahra Local Environmental Plan 1995*

Work for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

Note: Interpretation of Conditions - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.
Standard Condition: A2

A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
DA001 to DA019 inclusive	Architectural Plans	Marsh Cashman Koolloos	29.10.2007
A18982	BASIX Certificate	Department of Planning	23.10.2007
Ref: 251	Geotechnical Report	D Katauskas Consulting Geotechnical Engineer	24 Aug 2007
Dwg No. C01 to C06 Rev 1	Stormwater Management Plan	Northrop Consulting Engineers	26.10.07
	Landscape Plan	Paradisus	4.10.2007
	Arborist Report	TLC Tree Solutions.	Sept 2007

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)
Standard Condition: A5

B. Conditions which must be satisfied prior to the demolition of any building or construction

B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.
Standard Condition: B1

B.2 Establishment of Tree Protection Zones

To limit the potential for damage to trees to be retained, Tree Protection Zones are to be established around all trees to be retained on site. The Tree Protection Zones are to comply with the following requirements;

a) Tree Protection Zone areas

Council Reference No:	Species	Location	Radius from Trunk (Metres)*
1	Cedrus deodara	Rear adjacent property	3m (within property boundaries only)
2	Cedrus deodara	Rear northern boundary	4m (within property boundaries only)
3	Pittosporum undulatum	Rear northern boundary	2m (within property boundaries only)
A	Cupaniopsis anacardioides	Street Tree	1m

***NB:** Where this condition relates to street trees and the fence cannot be placed at the specified radius, the fencing is to be positioned so that the entire verge (nature strip) area in front of the subject property, excluding existing driveways and footpaths, is protected.

- b) Tree Protection Zones are to be fenced with a 1.8 metre high chainmesh or weldmesh fence to minimise disturbance to existing ground conditions. The area within the fence must be mulched, to a depth of 75mm, irrigated and maintained for the duration of the construction works.
- c) A sign must be erected on each side of the fence indicating the existence of a Tree Protection Zone and providing the contact details of the site Arborist.
- d) Existing soil levels must be maintained within Tree Protection Zones. Where excavation is undertaken adjacent such an area, the edge of the excavation must be stabilised, until such time as permanent measures are installed (eg. retaining wall etc) to prevent erosion within the Tree Protection Zone.
- e) The storage of materials, stockpiling, siting of works sheds, preparation of mixes, cleaning of tools or equipment is not permitted within Tree Protection Zones.

Site personnel must be made aware of all Tree Protection requirements, measures and any actions that constitute a breach of the Conditions of Development Consent with regard to tree protection on site during their site induction.

Standard Condition: B5

B.3 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a) The following trees must be retained:

Trees on Private Land

Council Reference No:	Species	Location	Dimension (Metres)
1	Cedrus deodara	Rear adjacent property	9m
2	Cedrus deodara	Rear northern boundary	11m
3	Pittosporum undulatum	Rear northern boundary	6m

Trees on Council Land

Council Reference No:	Species	Location	Dimension (Metres)
A	Cupaniopsis anacardioides	Street Tree	2.5m

Note: The tree trees required to be retained should appear coloured green on the construction certificate plans.

- b) The following trees may be removed:

Council Reference No:	Species	Location	Dimension (Metres)
4	Citrus limon	Rear northern boundary	4m
5	Cupressus sp	Rear north eastern property	11m
6	Row of 6 x Cupressus sp.	Rear northern boundary	10m (Ave)
7	Cupressus sp	Rear northern boundary	10m
8	Cupressus sp	Rear northern boundary	10m
9	Ficus rubiginosa	Front southern boundary	9m
10	Phoenix canariensis	Front of existing property	4m
11	Cinnamomum camphora	Front northern boundary	4m
12	Cinnamomum camphora	Front northern boundary	4m
13	Olea africana	Front northern boundary	4m
14	Cupressus sempervirens	Front east aspect	5m
15	Celtis sinensis	Front east aspect	8m
16	Olea africana	Front southern boundary	4m
17	Archontophoenix cunninghamiana	Front southern boundary	4m
18	Olea africana	Front northern boundary	4m

Note: The tree trees that may be removed should appear coloured red on the construction certificate plans.

- c) The following replacement trees which must be planted:

The following compensatory replacement plantings must be planted to ensure the preservation of the landscape character of the area.

Species/Type	Planting Location	Container Size or Size of Tree (@ time of planting)	Minimum Dimensions at Maturity
6 x suitable canopy tree species	distributed across the property with a minimum of 2 trees located in the front yard	100 Litre	5 x 3m

C. Conditions which must be satisfied prior to the issue of any construction certificate

C.1 Modification of details of the development (s80A(1)(g) of the Act)

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. The 2 proposed drainage outlets are to be combined into one connection. Any new kerb connection must be made using galvanised Rectangular Hollow Sections (RHS) (125 x 75 mm), or suitable kerb adaptors, to prevent ongoing damage to the kerb.
- b. All windows marked OG on the submitted architectural drawings are to be constructed with translucent glass.
- c. The proposed roof between the garage and northern side boundary is to be deleted.
- d. A planter with a minimum width of 1 metre is to be provided along the northern side of the terrace area at basement level.
- e. The rear boundary fence is to have a maximum height of 1.8 metres as measured from the finished ground level of the subject site.
- f. The proposed inclinor along the northern boundary is to be deleted from the proposal as insufficient details have been submitted to adequately assess the impacts of this structure.
- g. The roof is to be a mid-grey colour to reduce glare (reflectivity) to adjoining properties.

Note: The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

Note: Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

Note: Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.

Standard Condition: C4

C.2 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under Building and Construction Industry Long Service Payments Act 1986			
Long Service Levy Use Calculator: http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm	Contact LSL Corporation or use their online calculator	No	
SECURITY under section 80A(6) of the Environmental Planning and Assessment Act 1979			
Property Damage Security Deposit - Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$40,800	No	T115
DEVELOPMENT LEVY under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website www.woollahra.nsw.gov.au .			
Development Levy (S94A)	\$19,417 + Index Amount	Yes, quarterly	T96
INSPECTION FEES under section 608 of the Local Government Act 1993			
Public Road and Footpath Infrastructure Inspection Fee	\$361	No	
Security Administration Fee	\$168	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$60,746.00 Plus any relevant indexed amounts and long service levy		

Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act*, 1986, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

Note: The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

How must the payments be made?

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;

- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 94A levy be indexed?

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

Do you need HELP indexing the levy?

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

C.3 BASIX commitments

The *applicant* must submit to the *Certifying Authority BASIX Certificate* No. A18982 with any application for a *Construction Certificate*.

Note: Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

Note: Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"
Standard Condition: C7

C.4 Road and Public Domain Works – Council approval required

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*.

Specific works include:

- Full width vehicular crossings having a width of 5.0m including new layback and gutter in accordance with Council's standard drawing RF2.
- Encroachment – the existing boundary encroachments are to be removed and the footpath restored in concrete
- Reinstatement of footpath, kerb and gutter to match existing.

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from www.woollahra.nsw.gov.au.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: *Road* has the same meaning as in the *Roads Act 1993*.

Note: The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

C.5 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

Note: This condition has been imposed to eliminate potential water pollution and dust nuisance.

Note: The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

Note: The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/>.

Note: Pursuant to clause 161(1)(a)(5) of the *Regulation an Accredited Certifier* may satisfied as to this matter.
Standard Condition: C25

C.6 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

Note: This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.
Standard Condition: C35

C.7 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

Note: This does not affect the right of the developer to seek staged Construction Certificates
Standard Condition: C36

C.8 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.
- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:
 - i. Will detect any settlement associated with temporary and permanent works and structures;
 - ii. Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
 - iii. Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);
 - iv. Will detect groundwater changes calibrated against natural groundwater variations;details:
 - the location and type of monitoring systems to be utilised;
 - the preset acceptable limits for peak particle velocity and ground water fluctuations;
 - recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
 - a contingency plan.

Standard Condition: C40

C.9 Bicycle, Car and Commercial Parking Details

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.
Standard Condition: C45

C.10 Stormwater management plan (Clause 25(2) WLEP 1995)

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include a *Stormwater Management Plan* for the site.

The *Stormwater Management Plan* must detail:

- a) general design in accordance with *Northrop Consulting Engineers Dwg No. C01 to C06 Rev 1 dated 26.10.07*. The proposed 2 pipe connections are to be replaced with one galvanised Rectangular Hollow Sections (RHS) (125 x 75 mm
- b) the discharge of stormwater, by a single direct connection, to kerb in Bulkara Rd;
- c) compliance the objectives and performance requirements of the BCA;
- d) any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- e) general compliance with the Council’s draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004), and
- f) on-site stormwater detention (“OSD”).

OSD Requirements

The minimum (OSD) Site Storage Requirements (“SSR”) and the Peak Site Discharge (“PSD”) from the site must be in accordance with the following minimum storage/discharge relationships based upon a 1000m² site area:

Average Reoccurrence Interval	PSD L/s	Minimum Site Storage Requirement (SSR) m ³
2 year	23.5 L/s	4m ³
100 year	34 L/s	25m ³ – Dwelling House 27m ³ – Residential Flat Building 29m ³ – Other Development
All values based on per 1000m ² site area (interpolate to site area).		

Where a rainwater tank is proposed in conjunction with OSD, the volume of the rainwater tank may contribute to the SSR as follows:

- Where the rainwater tank is used for external uses only, 40% of the rainwater tank volume to a maximum of 4m³, or

- Where the rainwater tank is used for external and internal uses, 75% of the rainwater tank volume to a maximum of 7.5m³.

Example: The Site Storage Requirements may be 25,000 litres and a 10,000 litre rainwater tank is to be used for garden irrigation. Therefore, the rainwater tank contributes 4,000 litres toward SSR. Therefore, the OSD tank needs to be 21,000 litres (25,000 litres less the 4,000 litres allowance). Note: 1m³ = 1,000 litres.

The *Stormwater Management Plan* must include the following specific requirements:

Layout plan

A detailed drainage plan at a scale of 1:100 based on drainage calculations prepared in accordance with the Institute of Engineers Australia publication, *Australian Rainfall and Run-off*, 1987 edition or most current version thereof.

It must include:

- All pipe layouts, dimensions, grades, lengths and material specification,
- Location of On-Site Detention,
- All invert levels reduced to Australian Height Datum (AHD),
- Location and dimensions of all drainage pits,
- Point and method of connection to Councils drainage infrastructure, and
- Overland flow paths over impervious areas.

On-site Detention (OSD) details:

- Any potential conflict between existing and proposed trees and vegetation,
- Internal dimensions and volume of the proposed detention storage,
- Diameter of the outlet to the proposed detention storage basin,
- Plans, elevations and sections showing the detention storage basin invert level, centre-line level of outlet, top water level, finished surface level and adjacent structures,
- Details of access and maintenance facilities,
- Construction and structural details of all tanks and pits and/or manufacturer's specifications for proprietary products,
- Details of the emergency overland flow-path (to an approved Council drainage point) in the event of a blockage to the on-site detention system,
- Non-removable fixing details for orifice plates where used,

Copies of certificates of title, showing the creation of private easements to drain water by gravity, if required.

Subsoil Drainage - Subsoil drainage details, clean out points, discharge point.

Note: This Condition is imposed to ensure that site stormwater is disposed of in a controlled and sustainable manner.

Standard Condition: C51

C.11 Swimming and Spa Pools – Child Resistant Barriers

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation* must demonstrate compliance (by showing the proposed location of all child-resistant barriers and the resuscitation sign) with the provisions of the *Swimming Pools Act 1992*.

Note: A statement to the effect that isolation swimming pool fencing complying with AS1926 will be installed does not satisfy this condition. The location of the required barriers and the sign must be detailed upon the *Construction Certificate* plans.
Standard Condition: C55

C.12 Swimming and Spa Pools – Backwash

The *Construction Certificate* plans and specification required to be submitted pursuant to clause 139 of the *Regulation* must detail the connection of backwash to Sydney Waters sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: The plans must show the location of Sydney Waters sewer, the yard gully or any new connection to the sewer system including a detailed cross section of the connection complying with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: The discharge of backwash water to any stormwater system is water pollution and an offence under the *Protection of the Environment Operations Act 1997*. The connection of any backwash pipe to any stormwater system is an offence under the *Protection of the Environment Operations Act 1997*.
Standard Condition: C56

C.13 Light & Ventilation

The *Construction Certificate* plans and specifications, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail all a lighting, mechanical ventilation or air-conditioning systems complying with Part F.4 of the *BCA* or clause 3.8.4 and 3.8.5 of the *BCA Housing Provisions*, inclusive of [AS 1668.1](#), [AS 1668.2](#) and [AS/NZS 3666.1](#). If an alternate solution is proposed then the *Construction Certificate* application must include a statement as to how the performance requirements of the *BCA* are to be complied with and support the performance based solution by expert *evidence of suitability*. This condition does not set aside the mandatory requirements of the *Public Health (Microbial Control) Regulation 2000* in relation to *regulated systems*. This condition does not set aside the effect of the *Protection of the Environment Operations Act 1997* in relation to offensive noise or odour.

Note: Clause 98 of the *Regulation* requires compliance with the *BCA*. Clause 145 of the *Regulation* prevents the issue of a *Construction Certificate* unless the *Accredited Certifier/Council* is satisfied that compliance has been achieved. Schedule 1, Part 3 of the *Regulation* details what information must be submitted with any *Construction Certificate*. It is the Applicant's responsibility to demonstrate compliance through the *Construction Certificate* application process. Applicants must also consider possible noise and odour nuisances that may arise. The provisions of the *Protection of the Environment Operations Act 1997* have overriding effect if offensive noise or odour arises from the use. Applicant's must pay attention to the location of air intakes and air exhausts relative to sources of potentially contaminated air and neighbouring windows and air intakes respectively, see section 2 and 3 of [AS 1668.2](#).

Standard Condition C59

D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),
- or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

Note: This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.
Standard Condition: D1

D.2 Dilapidation Reports for existing buildings

Dilapidation surveys must be conducted and dilapidation reports prepared by a *professional engineer* (structural) of all buildings on land whose title boundary abuts the site and of such further buildings located within the likely “zone of influence” of any excavation, dewatering and/or construction induced vibration.

These properties must include (but is not limited to):

- 5 Bulkara Road
- 9 Bulkara Road


The dilapidation reports must be completed and submitted to *Council* with the *Notice of Commencement* prior to the commencement of any *development work*.

Where excavation of the site will extend below the level of any immediately adjoining building the *principal contractor* or *owner builder* must give the adjoining building owner(s) a copy of the dilapidation report for their building(s) and a copy of the *notice of commencement* required by s81A(2) of the *Act* not less than two (2) days prior to the commencement of any work.


Standard Condition: D4

D.3 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

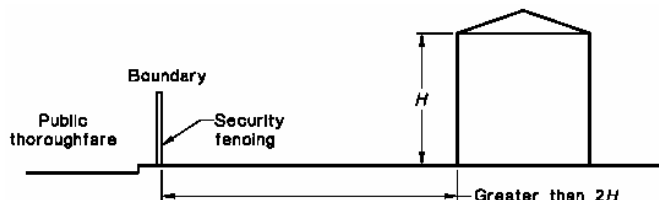

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

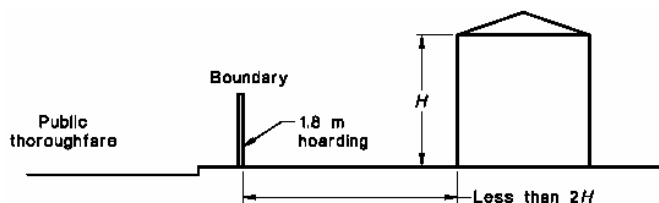


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

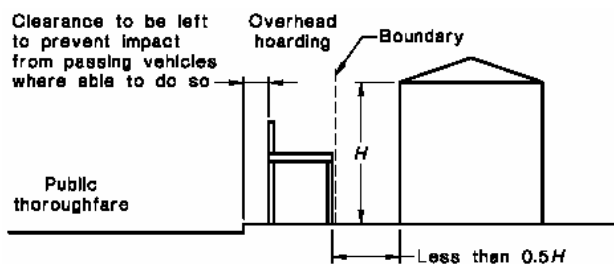

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstrucs.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Note: The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.
Standard Condition: D11

D.4 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

accredited sewage management facility means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

approved by the council means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

public sewer has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

sewage management facility has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

Note: This condition does not set aside the requirement to comply with Workcover NSW requirements.
Standard Condition: D13

D.5 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (‘The Blue Book’).

Where there is any conflict The Blue Book takes precedence.

Note: The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

Note: The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from www.woollahra.nsw.gov.au.

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution” **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.
Standard Condition: D14

D.6 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:

- i. appointed a principal certifying authority for the building work, and
 - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
 - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
 - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
 - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - ii. notified the principal certifying authority of any such appointment, and
 - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website www.woollahra.nsw.gov.au.

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.
Standard Condition: D15

D.7 Notification of Home Building Act 1989 requirements

- a. For the purposes of section 80A (11) of the *Act*, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:

- i. in the case of work for which a *principal contractor* is required to be appointed:
 - the name and licence number of the principal contractor, and
 - the name of the insurer by which the work is insured under Part 6 of that Act,
- ii. in the case of work to be done by an owner-builder:
 - the name of the owner-builder, and
 - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.
Standard Condition: D17

D.8 Establishment of boundary location, building location and datum

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;
- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

Note: Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

Note: On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.
Standard Condition: D18

E. Conditions which must be satisfied during any development work

E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

E.2 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

E.3 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

Note: The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

Note: The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

E.4 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

Note: The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

Note: Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

Note: The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

Note: Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

Note: EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.

Note: see http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf
Standard Condition: E6

E.5 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

Note: Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

Note: Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
- 2. Place waste in a public place
- 3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
- 2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council Approval* and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway. Standard Condition: E7

E.6 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

- a. The following trees must be retained:

Trees on Private Land

Council Reference No:	Species	Location	Dimension (Metres)
1	Cedrus deodara	Rear adjacent property	9m
2	Cedrus deodara	Rear northern boundary	11m
3	Pittosporum undulatum	Rear northern boundary	6m

Trees on Council Land

Council Reference No:	Species	Location	Dimension (Metres)
A	Cupaniopsis anacardioides	Street Tree	2.5m

Note: The tree trees required to be retained should appear coloured green on the construction certificate plans.

- b. The following trees may be removed:

Council Reference No:	Species	Location	Dimension (Metres)
4	Citrus limon	Rear northern boundary	4m
5	Cupressus sp	Rear north eastern property	11m
6	Row of 6 x Cupressus sp.	Rear northern boundary	10m (Ave)
7	Cupressus sp	Rear northern boundary	10m
8	Cupressus sp	Rear northern boundary	10m
9	Ficus rubiginosa	Front southern boundary	9m
10	Phoenix canariensis	Front of existing property	4m
11	Cinnamomum camphora	Front northern boundary	4m
12	Cinnamomum camphora	Front northern boundary	4m
13	Olea africana	Front northern boundary	4m
14	Cupressus sempervirens	Front east aspect	5m
15	Celtis sinensis	Front east aspect	8m
16	Olea africana	Front southern boundary	4m
17	Archontophoenix cunninghamiana	Front southern boundary	4m
18	Olea africana	Front northern boundary	4m

Note: The tree trees that may be removed should appear coloured red on the construction certificate plans.
Standard Condition: E9

E.7 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions.

Note 1: See http://www.epa.nsw.gov.au/small_business/builders.htm for additional information.
Standard Condition: E11

E.8 Compliance with Geotechnical/Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

Note: The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council's recommendation that the author of the report be retained during the construction stage.
Standard Condition: E12

E.9 Support of adjoining land and buildings

A person must not do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

Note: This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

Note: Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

Note: Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: "**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road." Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

Note: The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council's care control or management, or any community or operational land as defined by the *Local Government Act 1993*.
Standard Condition: E13

E.10 Vibration Monitoring

Vibration monitoring equipment must be installed and maintained, under the supervision of a *professional engineer* with expertise and experience in geotechnical engineering, between any potential source of vibration and any *building* identified by the *professional engineer* as being potentially at risk of movement or damage from settlement and/or vibration during the excavation and during the removal of any excavated material from the land being developed.

If vibration monitoring equipment detects any vibration at the level of the footings of any adjacent building exceeding the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity an audible alarm must activate such that the *principal contractor* and any sub-contractor are easily alerted to the event.

Where any such alarm triggers all excavation works must cease immediately.

Prior to the vibration monitoring equipment being reset by the *professional engineer* and any further work recommencing the event must be recorded and the cause of the event identified and documented by the *professional engineer*.

Where the event requires, in the opinion of the *professional engineer*, any change in work practices to ensure that vibration at the level of the footings of any adjacent building does not exceed the peak particle velocity adopted by the *professional engineer* as the maximum acceptable peak particle velocity these changes in work practices must be documented and a written direction given by the *professional engineer* to the *principal contractor* and any sub-contractor clearly setting out required work practice.

The *principal contractor* and any sub-contractor must comply with all work directions, verbal or written, given by the *professional engineer*.

A copy of any written direction required by this condition must be provided to the *Principal Certifying Authority* within 24 hours of any event.

Where there is any movement in foundations such that damaged is occasioned to any adjoining *building* or such that there is any removal of support to *supported land* the *professional engineer*, *principal contractor* and any sub-contractor responsible for such work must immediately cease all work, inform the owner of that *supported land* and take immediate action under the direction of the *professional engineer* to prevent any further damage and restore support to the *supported land*.

Note: *Professional engineer* has the same mean as in Clause A1.1 of the BCA.

Note: *Building* has the same meaning as in section 4 of the Act i.e. “**building** includes part of a building and any structure or part of a structure”.

Note: *Supported land* has the same meaning as in section 88K of the Conveyancing Act 1919.
Standard Condition: E14

E.11 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



- Note 1:** A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.
- Note 2:** Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.
Standard Condition: E15

E.12 Disposal of site water during construction

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act 1993*;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act 1997*, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

Note: This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.
Standard Condition: E17

E.13 Check Surveys - boundary location, building location, building height and stormwater drainage system relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA's* satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.

Note: This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.
Standard Condition: E20

E.14 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

Note 1: “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site www.woollahra.nsw.gov.au or obtained from Council’s office.

Note 2: Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.workcover.nsw.gov.au and www.epa.nsw.gov.au . Other specific condition and advice may apply.

Note 3: Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.
Standard Condition: E23

E.15 Compliance with Council’s Specification for Roadworks, Drainage and Miscellaneous Works Road works and work within the Road and Footway

All work carried out on assets which are under Council ownership or will revert to the ownership, care, control or management of Council in connection with the *development* to which this consent relates must comply with Council’s *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

The *owner, principal contractor or owner builder* must meet all costs associated with such works.

This condition does not set aside the need to obtain relevant approvals under the *Roads Act 1993* or *Local Government Act 1993* for works within Roads and other public places.

Note: A copy of Council’s “*Specification for Roadworks, Drainage and Miscellaneous Works*” can be down loaded free of charge from Council’s website www.woollahra.nsw.gov.au
Standard Condition: E24

E.16 Swimming and Spa Pools – Temporary Child Resistant Barriers and other matters

Temporary child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* where any swimming pool or spa pool as defined by the *Swimming Pools Act 1992* contains more than 300mm in depth of water at any time. Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992* as soon as practical.

Backwash and any temporary dewatering from any swimming pool or spa pool as defined by the *Swimming Pools Act 1992* must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

Note: This condition does not prevent Council from issuing an order pursuant to section 23 of the *Swimming Pool Act 1992* or taking such further action as necessary for a breach of this condition or the *Swimming Pools Act 1992*.
Standard Condition: E26

F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)

F.1 Occupation Certificate (section 109M of the Act)

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

Note: New building includes an altered portion of, or an extension to, an existing building.
Standard Condition: F1

F.2 Amenity Landscaping

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site.

Note: This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.
Standard Condition: F6

F.3 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

Note: This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the BCA, comply with this consent and so that a public record of works as executed is maintained.

Note: The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, Development Standards, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

Note: The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.
Standard Condition: F7

F.4 Swimming and Spa Pools – Permanent Child Resistant Barriers and other matters

Prior to any occupation or use of the development and prior to filling any swimming pool as defined by the *Swimming Pool Act 1992*:

- a. Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992*.
- b. The *Principal Contractor* or *owner* must apply for and obtain a Compliance Certificate under section 24 of the *Swimming Pools Act 1992*.
- c. Public Pools must comply with the NSW Health Public Swimming Pool and Spa Pool Guidelines in force at that time and private pools are encouraged to comply with the same standards as applicable.
- d. Water recirculation and filtration systems must be installed in compliance with AS 1926.3-2003: *Swimming pool safety - Water recirculation and filtration systems*.

Backwash must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

- e. Water recirculation and filtration systems must be connected to the electricity supply by a timer that limits the systems operation such that it does not operate:
- f. before 8 am or after 8 pm on any Sunday or public holiday, or
before 7 am or after 8 pm on any other day.

Note: The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from:
<http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>
Standard Condition: F13

G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate

Nil.

H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))

H.1 Fulfillment of BASIX commitments – Clause 154B of the Regulation

All BASIX commitments must be effected in accordance with the BASIX Certificate No. A18982.

Note: Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled."
Standard Condition: H7

H.2 Landscaping

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan, arborist report, transplant method statement and tree management plan. The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

Note: This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.
Standard Condition: H9

H.3 Road Works (including footpaths)

The following works must be completed to the satisfaction of Council, in compliance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *principal contractor's* or *owner's* expense:

- a. stormwater pipes, pits and connections to public stormwater systems within the *road*;
- b. driveways and vehicular crossings within the *road*;
- c. removal of redundant driveways and vehicular crossings;
- d. new footpaths within the *road*;
- e. new or replacement street trees;
- f. new footway verges, where a grass verge exists, the balance of the area between the footpath and the kerb or site boundary over the full frontage of the proposed development must be turfed. The grass verge must be constructed to contain a uniform minimum 75mm of friable growing medium and have a total cover of turf predominant within the street.
- g. new or reinstated kerb and guttering within the *road*; and
- h. new or reinstated road surface pavement within the *road*.

Note: Security held by Council pursuant to section 80A(6) of the Act will not be release by Council until compliance has been achieved with this condition. An application for refund of security must be submitted with the *Final Occupation Certificate* to Council. This form can be downloaded from Council's website www.woollahra.nsw.gov.au or obtained from Council's customer service centre.
Standard Condition: H13

H.4 Positive Covenant & Works-As-Executed certification of stormwater systems

On completion of construction work, stormwater drainage works are to be certified by a *professional engineer* with Works-As-Executed drawings supplied to the *PCA* detailing:

- a. compliance with conditions of development consent relating to stormwater;
- b. the structural adequacy of the On-Site Detention system (OSD);
- c. that the works have been constructed in accordance with the approved design and will provide the detention storage volume and attenuation in accordance with the submitted calculations;

- d. Pipe invert levels and surface levels to Australian Height Datum; and
- e. Contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits.
- f. A positive covenant pursuant to Section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the on-site-detention system and/or absorption trenches, including any pumps and sumps incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land Titles Office.

Note: The required wording of the Instrument can be downloaded from Council's web site www.woollahra.nsw.gov.au. The PCA must supply a copy of the WAE Plans to Council together with the *Final Occupation Certificate*. The *Final Occupation Certificate* must not be issued until this condition has been satisfied.

Standard Condition: H20

I. Conditions which must be satisfied during the ongoing use of the development

I.1 Maintenance of BASIX commitments

All BASIX commitments must be maintained in accordance with the BASIX Certificate No. A18982.

Note: This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.

Standard Condition: I7

I.2 Maintenance of Landscaping

All landscaping must be maintained in general accordance with this consent.

This condition does not prohibit the planting of additional trees or shrubs subject that they are native species endemic to the immediate locality.

Reason: This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

Note: This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled "Local Native Plants for Sydney's Eastern Suburbs" published by Woollahra, Waverley, Randwick and Botany Bay Councils.

Standard Condition: I8

I.3 Swimming and Spa Pools – Maintenance

Swimming and Spa Pools must be maintained:

- a. in compliance with the *Swimming Pools Act 1992* with regard to the provision of child-resistant barriers and resuscitation signs;
- b. in compliance with the NSW Health "Public Swimming Pool and Spa Pool Guidelines" in force at that time. Private pools are encouraged to comply with the same standards as applicable;

- c. in compliance with AS 1926.3-2003:Swimming pool safety - Water recirculation and filtration systems ;
- d. with backwash being discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996, and
- e. with a timer that limits the recirculation and filtration systems operation such that it does not emit noise that can be heard within a habitable room in any other residential premises (regardless of whether any door or window to that room is open):
 - before 8 am or after 8 pm on any Sunday or public holiday, or
 - before 7 am or after 8 pm on any other day.

Note: Child-resistant barriers, resuscitation signs, recirculation and filtration systems and controls systems require regular maintenance to ensure that life safety, health and amenity standards are maintained.

Note: The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from:
<http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>
Standard Condition: I13

I.4 Rainwater Tank – Operation and Maintenance

All rainwater tank systems shall be operated and maintained in accordance with the technical provisions of the NSW Code of Practice for Plumbing and Drainage 3rd Edition 2006, AS/NZS 3500 as adopted by the Building Code of Australia, and the NSW Health Guideline "Use of Rainwater Tanks Where a Public Water Supply is Available".

Note: The NSW Health Guideline can be downloaded from http://www.health.nsw.gov.au/policies/gl/2007/pdf/GL2007_009.pdf. The guideline's introduction states: *"In urban areas the public water supply remains the most reliable source of good quality drinking water for the community. In these areas NSW Health supports the use of rainwater tanks for non-drinking uses, such as toilet flushing, washing clothes or in water heating systems, and outdoors for uses such as garden watering, car washing, filling swimming pools, spas and ornamental ponds, and fire fighting. Use of rainwater conserves the public water supply and helps to reduce stormwater impacts. In urban areas NSW Health recommends that people use the public water supply for drinking and cooking because it is filtered, disinfected and generally fluoridated."*
Standard Condition: I35

I.5 Outdoor lighting – Residential

Outdoor lighting must comply with AS 4282-1997: Control of the obtrusive effects of outdoor lighting. The maximum luminous intensity from each luminaire must not exceed the level 1 control relevant under table 2.2 of AS 4282. The maximum illuminance and the threshold limits must be in accordance with table 2.1 of AS 4282.

Reason: This condition has been imposed to protect the amenity of neighbours and limit the obtrusive effects of outdoor lighting in public places.

Note: This condition has been imposed to control the obtrusive effects of outdoor lighting.
Standard Condition: I42

I.6 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nlg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

Useful links:

Community Justice Centres—free mediation service provided by the NSW Government (www.cjc.nsw.gov.au).

Department of Environment and Conservation NSW, Noise Policy Section web page (www.environment.nsw.gov.au/noise).

New South Wales Government Legislation home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* (www.legislation.nsw.gov.au).

Australian Acoustical Society—professional society of noise-related professionals (www.acoustics.asn.au/index.php).

Association of Australian Acoustical Consultants—professional society of noise related professionals (www.aaac.org.au).

Department of Gaming and Racing - (www.dgr.nsw.gov.au).

Standard Condition: I50

I.7 Noise from mechanical plant and equipment

Noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Words in this condition have the same meaning as in the:
NSW Industrial Noise Policy (http://www.environment.nsw.gov.au/resources/ind_noise.pdf)
ISBN 0 7313 2715 2, dated January 2000, and
Noise Guide for Local Government (<http://www.environment.nsw.gov.au/noise/nlg.htm>)
ISBN 1741370671, dated December 2004.
Standard Condition: I53

I.8 On-going maintenance of the on-site-detention system

The Owner(s) must in accordance with this condition and any positive covenant:

- a. permit stormwater to be temporarily detained by the system;
- b. keep the system clean and free of silt rubbish and debris;
- c. if the car park is used as a detention basin, a weather resistant sign must be maintained in a prominent position in the car park warning residents that periodic inundation of the car park may occur during heavy rain;
- d. maintain renew and repair as reasonably required from time to time the whole or part of the system so that it functions in a safe and efficient manner and in doing so complete the same within the time and in the manner reasonably specified in written notice issued by the Council;
- e. carry out the matters referred to in paragraphs (b) and (c) at the Owners expense;

- f. not make any alterations to the system or elements thereof without prior consent in writing of the Council and not interfere with the system or by its act or omission cause it to be interfered with so that it does not function or operate properly;
- g. permit the Council or its authorised agents from time to time upon giving reasonable notice (but at anytime and without notice in the case of an emergency) to enter and inspect the land with regard to compliance with the requirements of this covenant;
- h. comply with the terms of any written notice issued by Council in respect to the requirements of this clause within the time reasonably stated in the notice;
- i. where the Owner fails to comply with the Owner's obligations under this covenant, permit the Council or its agents at all times and on reasonable notice at the Owner's cost to enter the land with equipment, machinery or otherwise to carry out the works required by those obligations;
- j. indemnify the Council against all claims or actions and costs arising from those claims or actions which Council may suffer or incur in respect of the system and caused by an act or omission by the Owners in respect of the Owner's obligations under this condition.

Reason: This condition has been imposed to ensure that owners are aware of require maintenance requirements for their stormwater systems.

Note: This condition is supplementary to the owner(s) obligations and Council's rights under any positive covenant.
Standard Condition: I12

J. Miscellaneous Conditions

Nil.

K. Advisings

K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's www.agd.nsw.gov.au.

Standard Advising: K1

K.2 Dial before you dig



The *principal contractor*, *owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit www.dialbeforeyoudig.com.au.

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

K.3 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

The Owner(s) must appoint the PCA. The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

K.4 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

K.5 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: Further information can be obtained from Workcover NSW's website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

K.6 Asbestos Removal, Repair or Disturbance

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

Note: The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting www.workcover.nsw.gov.au or one of Workcover NSW's offices for further advice.

Standard Advising: K8

K.7 Dividing Fences

The erection of dividing fences under this consent does not affect the provisions of the *Dividing Fences Act 1991*. Council does not adjudicate civil disputes relating to the provision of, or payment for, the erection of dividing fences.

Note: Further information can be obtained from the NSW Department of Lands - <http://www.lands.nsw.gov.au/LandManagement/Dividing+Fences.htm>. Community Justice Centres provide a free mediation service to the community to help people resolve a wide range of disputes, including dividing fences matters. Their service is free, confidential, voluntary, timely and easy to use. Mediation sessions are conducted by two impartial, trained mediators who help people work together to reach an agreement. Over 85% of mediations result in an agreement being reached. Mediation sessions can be arranged at convenient times during the day, evening or weekends. Contact the Community Justice Centre either by phone on 1800 671 964 or at <http://www.cjc.nsw.gov.au/>.
Standard Advising: K10

K.8 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

Mr M Schofield, Team Leader on (02) 93917145.

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

K.9 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>
Standard Condition: K15

K.10 Recycling of Demolition and Building Material

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

K.11 Owner Builders

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See www.fairtrading.nsw.gov.au.

Standard Condition: K18

D3 DA739/2007 – 1/17A Cooper Park Road, Bellevue Hill – Alterations including extension of courtyard, new landscaping & new fencing – 14/11/2007

Note: Councillor Huxley advised the Committee that Councillor Petrie declared a pecuniary interest in this Item as he is co-owner of the property. Councillor Petrie was not present at the meeting.

Note: Late correspondence was tabled by Joseph La Posta Council's Senior Assessment Officer.

Note: Steven Klein of Bellevue Hill, Fred Heilpern as head objector of Bellevue Hill, Anna Berger of Bellevue Hill, objectors, Zoltan Kovacs the applicant and Edwina Petrie co-owner addressed the committee.

Motion moved by Councillor Shoebridge Seconded by Councillor Excell

THAT the matter be referred to a site inspection meeting to be held at 8.00am on Wednesday 16 April 2008.

**Councillor Excell withdrew seconding of the motion.
Councillor Dawson seconded the motion**

Amendment moved by Councillor Shapiro

THAT the recommendation for approval of Development Application No. 739/2007 be adopted.

The Amendment lapsed for want of a seconder

**Amendment moved by Councillor Excell
Seconded by Councillor Gardner**

THAT DA739/2007 – 1/17A Cooper Park Road, Bellevue Hill for alterations including extension of courtyard, new landscaping & new fencing be refused due to the non compliance with the site specific DCP specific to the amenity of the neighbours.

**Amendment was put and lost.
The motion was carried.**

(Shoebridge/Dawson)

THAT the matter be referred to a site inspection meeting to be held at 8.00am on Wednesday 16 April 2008.

D4 DA606/2005 Part 2 – 54 Kings Road, Vaucluse – Section 96 Application – Proposed modification addition of plant room & addition of louvered openings – 12/9/2007

Note: In accordance with Council's meeting procedures and policy this matter is referred to full Council due to a substantive change of the Committee's recommendation (refusal) to the officers recommendation (approval). **(See Item R1)**

D5 DA318/2005 Part 2 – 41 Cascade Street, Paddington - Section 96 Application – Proposed modification including modifications to balcony to the rear, reconstruction of shed, deletion of rear deck & modification to rear courtyard layout – 11/1/2008

Note: In accordance with Council's meeting procedures and policy this matter is referred to full Council due to a substantive change of the Committee's recommendation (refusal) to the officers recommendation (approval). **(See Item R2)**

D6 DA236/2007 – 794-796 New South Head Road, Rose Bay (Kambala School) – Change of use from the existing DA consent (511/2004) for school boarding & dining facilities to an Early Learning Centre (ELC) with internal & minor external alterations to Council approved plans (building envelope) – 17/4/2007

Note: Jennifer Stricker of Rose Bay, objector, and Ross Gardner of Gardner Architects on behalf of the owner and applicant addressed the Committee.

Note: The Committee amended condition A.4 (Student Numbers) and added new condition A.9 (Hours of operation).

**Motion moved by Councillor Martin
Seconded by Councillor Shapiro**

THAT the recommendation for approval be adopted subject to inclusion of an additional condition to limit the hours of use of the Early Learning Centre (ELC) to 7.30am to 7.30pm Monday to Friday.

**Amendment moved by Councillor Shoebridge
Seconded by Councillor Dawson**

THAT the recommendation for approval be adopted subject to inclusion of an additional condition to limit the hours of use of the Early Learning Centre (ELC) to 7.30am to 7.30pm Monday to Friday and amending condition A.4 (Student Numbers) to read as follows:-

The maximum student numbers for Kambala shall not exceed 950 students. This condition has been imposed to cap the number of students to limit the impacts on the existing road network, car parking and adjoining properties.

**Amendment was put and carried.
The Amendment became the motion
The motion was adopted.**

(Shoebridge/Dawson)

Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979

THAT the Council, as the consent authority, is of the opinion that the objection under *State Environmental Planning Policy 1 – Development Standards* to Clause 12 - Height under WLEP 1995 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the non-compliance will not have any adverse impact on the amenity of adjoining properties.

AND

THAT the Council, as the consent authority, being satisfied that the objection under SEPP 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 236/2007 is consistent with the aims of the Policy, grant development consent to DA No. 236/2007 for the change of use from existing DA consent (511/2004) for school boarding and dining facilities to an Early Learning Centre (ELC) with internal and minor external alterations to the council approved plans (building envelope) on land at 794-796 New South Head Road, Rose Bay (Kambala School), subject to the following conditions:

A. General Conditions

A.1 Relationship to Development Application 511/2004

Where there is any inconsistency between the plans, development consent 511/2004 shall be modified by the works in the subject DA (236/2007) pursuant to Section 80A(1)(b) of the Environmental Planning and Assessment Act 1979 (Refer to plans A930-A938, Issue D, dated 5 June 2006 and drawn by Gardner Wetherill & Associates).

The following is to be complied with:

- the works under DA 511/2004 and DA 236/2007 are to be carried out concurrently
- given the amending DA, **Conditions 72 & 74** of DA 511/2004 are to be deleted

The provisions of Clause 97 of the Environmental Planning & Assessment Regulation 2000 are to be met prior to an Occupation Certificate being issued.

This condition has been imposed to ensure the development, as constructed, will be consistent with this application.

A.2 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
Acoustic Assessment	Acoustic Report	Acoustic Studio	August 2006
A0900 (E) A1101 (M) A1102 (M) A1201 (P) A1301 (M) A1302 (M) A1400 (K) A1401 (G) A1500 (H) A1501 (J) A1600 (H)	Architectural Plans	Gardner Wetherill & Associates	30 July 2004
Kambala: Bayview Centre	Operational Plan	Unknown	April 2007
LP01 (B) LP02 (B)	Landscape Plan	Leuchars Partners Landscape Architects	June 2006
Ref 26068r	Traffic Report	Transport & Urban Planning	April 2007

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)
Standard Condition: A5

A.3 Health Condition

Having reviewed the acoustic report prepared by Acoustic Studio and considering that **a more stringent noise criterion has been applied to the proposed development**, it is recommended that:

1. The L_{A10}^* noise level emitted from the proposed development shall not exceed the background noise level in any Octave Band Centre Frequency (31.5 Hz – 8k Hz inclusive) by more than 5 dB between 07:00 am and 12:00 midnight at the boundary of any affected residence.

The L_{A10}^* noise level emitted from the proposed development shall not exceed the background noise level in any Octave Band Centre Frequency (31.5 Hz – 8k Hz inclusive) between 12:00 midnight and 07:00 am at the boundary of any affected residence.

Notwithstanding compliance with the above, the noise from the proposed development shall not be audible within any habitable room in any residential premises between the hours of 12:00 midnight and 07:00 am.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

For the purposes of this condition, the LA10 can be taken as the average maximum deflection of the noise emission from the subject premises.

2. The recommendations listed in the acoustic report prepared by Acoustic Studios (Report No. GWA1121.0005.RepD.060810.doc dated August 2006), including noise management controls, are to be fully implemented, to ensure that noise activities within the proposed Early Childhood Centre are sufficiently controlled and attenuated to minimise noise impacts on nearby residential receivers.
3. Construction Certificate plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the Regulation, must detail all proposed mechanical ventilation services complying with the Building Code of Australia and Australian Standard 1668 Parts 1 & 2. If an alternate solution is proposed then the Construction Certificate application must include a statement as to how the performance requirements of the BCA are to be complied with and support the performance based solution by expert evidence of suitability.

The level of noise emitted from the operation of all mechanical plant and equipment must comply with Woollahra Council's Noise Criterion, in that the level of noise must not exceed background noise when measured at the nearest lot boundary of the site.

Other

1. The premises being ventilated in accordance with the Building Code of Australia and AS/NZS 1668 Parts 1 & 2.
2. All internal sanitary compartments not provided with natural ventilation being provided with a system of mechanical exhaust ventilation in accordance with the requirements of the Building Code of Australia.
3. A door or half gate, or other barrier being provided to prevent unsupervised entry by children to the kitchen area.
4. A separate bottle preparation area to be provided in the eastern wing at Level 2.

5. The floor of the kitchen being constructed of materials to enable effective cleaning, impervious to grease, food particles and water and be unable to provide harbourage for pests. Coving being provided at the junction of the floor and walls.
6. The wall surfaces in the kitchen being finished with materials such as ceramic tiling, vinyl sheeting or other impervious material to enable the walls to be easily and effectively cleaned to a height of at least 2 metres.
7. All food contact surfaces of fixtures, fittings and equipment in the kitchen must be able to be effectively cleaned, unable to absorb grease, food particles and water and made of materials that will not contaminate food. Cupboards and benches shall be placed on metal legs (150mm in height) or placed on solid plinths (75mm in height).
8. A double sink with a supply of hot and cold potable water for the use of utensil and equipment washing being provided in the kitchen.
9. A separate and accessible wash hand basin being provided in the kitchen supplied with warm running potable water through a mixer tap or common outlet. A soap dispenser and single use paper towels provided near the wash hand basin.
10. Adequate refrigeration equipment being provided in the kitchen to cool potentially hazardous foods capable of holding food under temperature control.
11. Facilities for the preparation and storage of food must be designed, located and maintained so as to prevent children from gaining access to any harmful substance, equipment or amenity.
12. The centre shall provide safe, sanitary facilities for the storage of soiled clothes, linen and nappies before laundering or disposal.
13. Sanitary facilities must comply with the requirements for class 9b buildings (Early childhood centres) of clause F2.3 of the Building Code of Australia. Table F2.3—9b provides that for every 15 children or part thereof there must be a junior toilet or adult toilet with a firm step and a junior seat one hand basin with a rim height not exceeding 600mm.
14. A bench type baby bath must be provided on the premises for children aged under 3 years in accordance with Table F2.3-9b of the Building Code of Australia.
15. A properly constructed nappy change bench together with a mat that has an impervious washable surface shall be provided for every 10 children (or part thereof) with hand washing facilities for adults in the immediate vicinity of the nappy changing area as required by the Children's Services Regulation 2004.
16. Appropriate waste storage facilities being provided on the premises, sufficiently sized so as to store the waste generated by the proposed use with allowance for separation of putrescible waste from recyclables. Council's Waste Services Section be contacted as to the appropriate size and location of the proposed waste storage facility.
17. No amplification equipment, musical instruments and the like being permitted to be used in outdoor play areas.

A.4 Student Numbers

The maximum student numbers for Kambala shall not exceed 950 students. This condition has been imposed to cap the number of students to limit the impacts on the existing road network, car parking and adjoining properties.

A.5 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

A.6 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

Applicant means the applicant for this Consent.

Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

AS or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

BCA means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

Council means Woollahra Municipal Council

Court means the Land and Environment Court

Local native plants means species of native plant endemic to Sydney’s eastern suburbs (see the brochure titled “Local Native Plants for Sydney’s Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

Stormwater Drainage System means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

Owner means the owner of the *site* and successors in title to the *site*.

Owner Builder has the same meaning as in the *Home Building Act 1989*.

PCA means the *Principal Certifying Authority* under the *Act*.

Principal Contractor has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

Professional Engineer has the same meaning as in the *BCA*.

Public Place has the same meaning as in the *Local Government Act 1993*.

Road has the same mean as in the *Roads Act 1993*.

SEE means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

Site means the land being developed subject to this consent.

WLEP 1995 means *Woollahra Local Environmental Plan 1995*

Work for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

Note: Interpretation of Conditions - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.
Standard Condition: A2

A.7 Ancillary Aspect of the Development (s80A(2) of the Act)

The owner must procure the repair, replacement or rebuilding of all road pavement, kerb, gutter, footway, footpaths adjoining the site or damaged as a result of work under this consent or as a consequence of work under this consent. Such work must be undertaken to Council's satisfaction in accordance with Council's "Specification for Roadworks, Drainage and Miscellaneous Works" dated January 2003 unless expressly provided otherwise by these conditions at the *owner's* expense.

Note: This condition does not affect the *principal contractor's* or any sub-contractors obligations to protect and preserve public infrastructure from damage or affect their liability for any damage that occurs.
Standard Condition: A8

A.8 Prescribed Conditions

Prescribed conditions in force under the *Act* and *Regulation* must be complied with.

Note: It is the responsibility of those acting with the benefit of this consent to comply with all prescribed conditions under the *Act* and the *Regulation*. Free access can be obtained to all NSW legislation at www.legislation.nsw.gov.au
Standard Condition: A30

A.9 Hours of operations

The hours of use of the early learning centre are to be 7.30 am to 7.30 pm Monday to Friday.

B. Conditions which must be satisfied prior to the demolition of any building or construction

B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.
Standard Condition: B1

C. Conditions which must be satisfied prior to the issue of any construction certificate

C.1 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under Building and Construction Industry Long Service Payments Act 1986			
Long Service Levy Use Calculator: http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm	Contact LSL Corporation or use their online calculator	No	

SECURITY			
under section 80A(6) of the Environmental Planning and Assessment Act 1979			
Property Damage Security Deposit - Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$81,000	No	T115
DEVELOPMENT LEVY			
under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website www.woollahra.nsw.gov.au .			
Development Levy (S94A)	\$39,500 + Index Amount	Yes, quarterly	T96
INSPECTION FEES			
under section 608 of the Local Government Act 1993			
Security Administration Fee	\$168	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$120,668 Plus any relevant indexed amounts and long service levy		

Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

Note: The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

How must the payments be made?

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 94A levy be indexed?

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

Do you need HELP indexing the levy?

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

C.2 Road and Public Domain Works – Council approval required

This development consent does NOT give approval to works or structures over, on or under public roads or footpaths excluding minor works subject to separate Road Opening Permit.

Detailed plans and specifications of all works (including but not limited to structures, road works, driveway crossings, footpaths and stormwater drainage) within existing roads, must be submitted to and approved by *Council* under the *Roads Act 1993*, before the issue of any *Construction Certificate*.

It should be noted that any request for signage changes (i.e. 15 minute parking for the Early learning Centre drop-off etc) in Tivoli Av, Bayview Hill Av or New South Head Rd will not be approved.

Access levels and grades to and within the development must match access levels and grades within the road approved under the *Roads Act 1993*.

All public domain works must comply with Council's "*Specification for Roadworks, Drainage and Miscellaneous Works*" dated January 2003 unless expressly provided otherwise by these conditions. This specification can be downloaded from www.woollahra.nsw.gov.au.

Note: To ensure that this work is completed to Council's satisfaction, this consent by separate condition, may impose one or more Infrastructure Works Bonds.

Note: When a large *Roads Act* is required, then four (4) weeks is to be allowed for assessment.

Note: *Road* has the same meaning as in the *Roads Act 1993*.

Note: The intent of this condition is that the design of the road, footpaths, driveway crossings and public stormwater drainage works must be detailed and approved prior to the issue of any *Construction Certificate*. Changes in levels may arise from the detailed design of buildings, road, footpath, driveway crossing grades and stormwater. Changes required under *Road Act 1993* approvals may necessitate design and levels changes under this consent. This may in turn require the applicant to seek to amend this consent.

Standard Condition: C13

C.3 Utility Services Generally

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must demonstrate that all utility services (telecommunications, electricity, gas, water and waste water) will be provided underground. All service ducts, pipes and conduits must be provided within the fabric of the building (excluding stormwater down pipes).

Where telecommunications and electricity are provided from existing poles in the road they must, in accordance with the relevant suppliers' requirements, be carried to the site underground directly to the main switch board within the fabric of the building.

Note: Where adequate provision has not been made for an electrical sub-station within the building, this may necessitate the lodgement of an application to amend this consent under section 96 of the Act to detail the location, landscape/streetscape impacts and compliance with AS2890 as applicable.

The location of service poles and substations required by the relevant suppliers must be shown upon the plans submitted with any *Construction Certificate* application together with a letter from each relevant supplier setting out their requirements.

Proposed water pipes, waste pipes, stack work, duct work, mechanical ventilation plant and the like must be located within the building unless expressly shown upon the approved DA plans. Details confirming compliance with this condition must be shown on the *Construction Certificate* plans and/or detailed within the *Construction Certificate* specifications. Required external vents or vent pipes on the roof or above the eaves must be shown on the *Construction Certificate* plans.

Note: The intent of this condition is that the design quality of the development must not be compromised by cables, pipes, conduits, ducts, plant, equipment, electricity substations or the like placed such that they are visible from any adjoining public place. They must be contained within the building unless shown otherwise by the approved development consent plans.

The *Construction Certificate* plans and specifications, required to be submitted to the Certifying Authority pursuant to clause 139 of the *Regulation*, must detail the replacement of all private sewer pipes between all sanitary fixtures and Sydney Waters sewer main where they are not found by inspection to be UPVC or copper with continuously welded joints.

Note: This condition has been imposed to ensure that where private sewer pipes are old, may leak or may be subject to root invasion (whether from existing or proposed private or public landscaping) that existing cast iron, concrete, earthenware or terracotta pipes be replaced with new UPVC or copper continuously welded pipes between all sanitary fixtures and Sydney Waters sewer main, such that clause 25(1) of WLEP 1995 be satisfied. Further, leaking sewer pipes are a potential source of water pollution, unsafe and unhealthy conditions which must be remedied in the public interest.
Standard Condition: C20

C.4 Bicycle, Car and Commercial Parking Details

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must include detailed plans and specifications for all bicycle, car and commercial vehicle parking in compliance with AS2890.3:1993 *Parking Facilities - Bicycle Parking Facilities*, AS/NZS 2890.1:2004 : *Parking Facilities - Off-Street Car Parking* and AS 2890.2:2002 – *Off-Street Parking: Commercial Vehicle Facilities* respectively.

Specific works include:

- The submission of a Management Plan for the smooth operation of drop-off and pick-up arrangements for students
- The allocation and marking of all parking spaces

Access levels and grades must comply with access levels and grade required by Council under the *Roads Act 1993*.

The *Certifying Authority* has no discretion to reduce or increase the number or area of car parking or commercial parking spaces required to be provided and maintained by this consent.
Standard Condition: C45

C.5 Stormwater discharge to existing Stormwater Drainage System (Clause 25(2) WLEP 1995)

The *Construction Certificate* plans and specifications required by clause 139 of the Regulation, must detail:

- a. the location of the existing *Stormwater Drainage System* including all pipes, inspection openings, surface drains, pits and their discharge location,
- b. the state of repair of the existing *Stormwater Drainage System*,
- c. any remedial works required to upgrade the existing *Stormwater Drainage System* to comply with the BCA,
- d. any remedial works required to upgrade the existing *Stormwater Drainage System* crossing the footpath and any new kerb outlets,
- e. any new *Stormwater Drainage System* complying with the BCA,
- f. interceptor drain(s) at the site boundary to prevent stormwater flows from the site crossing the footpath,
- g. any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- h. general compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004)

Where any new *Stormwater Drainage System* crosses the footpath area within any road, separate approval under section 138 of the *Roads Act 1993* must be obtained from Council for those works prior to the issue of any *Construction Certificate*.

All *Stormwater Drainage System* work within any road or public place must comply with Woollahra Municipal Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

Note: Clause F1.1 of Volume 1 and Part 3.1.2 of Volume 2 of the BCA provide that stormwater drainage complying with AS/NZS 3500.3 Plumbing and drainage - Part 3: Stormwater drainage is deemed-to-satisfy the BCA. Council's specifications apply in relation to any works with any road or public place.

Note: Stormwater Drainage Systems must not discharge to any Sewer System. It is illegal to connect stormwater pipes and drains to the sewerage system as this can overload the system and cause sewage overflows. See:
<http://www.sydneywater.com.au/Publications/Factsheets/SewerfixLookingAfterYourSewerPipes.pdf>

Note: Woollahra Municipal Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003 and Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004) can be downloaded from Council's website:
www.woollahra.nsw.gov.au
Standard Condition: C49

C.6 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

Note: This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.
Standard Condition: C35

C.7 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the Regulation, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

Note: This does not affect the right of the developer to seek staged Construction Certificates
Standard Condition: C36

C.8 Modification of details of the development (s80A(1)(g) of the Act)

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. a rainwater tank (minimum capacity of 2,000 litres) must be installed and associated with the ELC. This condition has been imposed to ensure compliance with the Child Care Centres DCP

Note: The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.


Note: Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

Note: Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.
Standard Condition: C4


D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

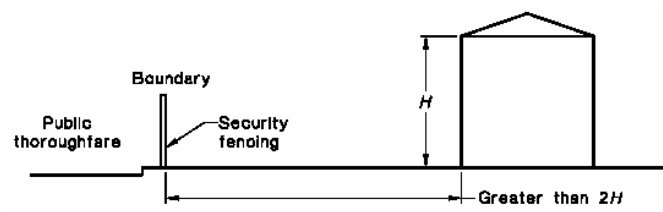

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

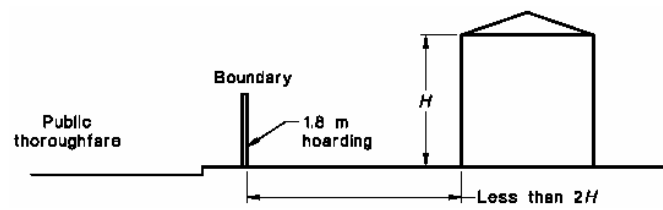


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;

- b. have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- c. together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

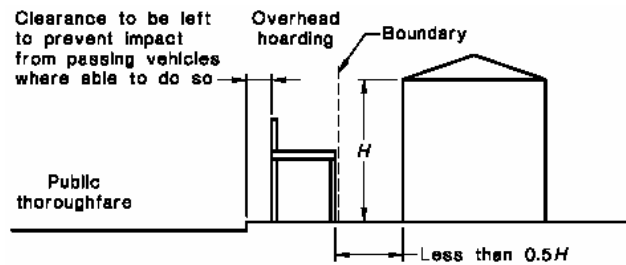

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstruucts.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Note: The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.
Standard Condition: D11

D.2 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (‘The Blue Book’).

Where there is any conflict The Blue Book takes precedence.

Note: The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

Note: The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be downloaded free of charge from www.woollahra.nsw.gov.au.

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution” **Warning**, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.

Standard Condition: D14

D.3 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),
- or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.

Note: This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the *Home Building Act 1989*. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.

Standard Condition: D1

D.4 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:

- a. showing the name, address and telephone number of the principal certifying authority for the work, and
 - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
 4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
 5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws."

Note: *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

Note: If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.
Standard Condition: D12

D.5 Toilet Facilities

Toilet facilities are to be provided, at or in the vicinity of the work site on which work involved in the erection or demolition of a building is being carried out, at the rate of one toilet for every 20 persons or part of 20 persons employed at the site.

Each toilet provided:

- a. must be a standard flushing toilet, and
- b. must be connected to a public sewer, or
- c. if connection to a public sewer is not practicable, to an accredited sewage management facility approved by the council, or
- d. if connection to a public sewer or an accredited sewage management facility is not practicable, to some other sewage management facility approved by the council.

The provision of toilet facilities in accordance with this condition must be completed before any other work is commenced.

In this condition:

accredited sewage management facility means a sewage management facility to which Division 4A of Part 3 of the *Local Government (Approvals) Regulation 1993* applies, being a sewage management facility that is installed or constructed to a design or plan the subject of a certificate of accreditation referred to in clause 95B of the *Local Government (Approvals) Regulation 1993*.

approved by the council means the subject of an approval in force under Division 1 of Part 3 of the *Local Government (Approvals) Regulation 1993*.

public sewer has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

sewage management facility has the same meaning as it has in the *Local Government (Approvals) Regulation 1993*.

Note: This condition does not set aside the requirement to comply with Workcover NSW requirements.
Standard Condition: D13

D.6 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
 - i. appointed a principal certifying authority for the building work, and
 - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
 - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
 - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
 - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - ii. notified the principal certifying authority of any such appointment, and
 - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website www.woollahra.nsw.gov.au.

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the Act.

Standard Condition: D15

D.7 Establishment of boundary location, building location and datum

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum (“AHD”) in compliance with the approved plans;
- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

Note: Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

Note: On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.

Standard Condition: D18

E. Conditions which must be satisfied during any development work

E.1 Compliance with Construction Management Plan

All development activities and traffic movements must be carried out in accordance with the approved construction management plan.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

Note: Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.

Standard Condition: E3

E.2 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

Note: Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

Note: Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.
Standard Condition: E7

E.3 Maintenance of Environmental Controls

The *principal contractor* or *owner builder* must ensure that the following monitoring, measures and controls are maintained:

- a) Erosion and sediment controls,
- b) Dust controls,
- c) Dewatering discharges,
- d) Noise controls;
- e) Vibration monitoring and controls;
- f) Ablutions;

Note 1: See http://www.epa.nsw.gov.au/small_business/builders.htm for additional information.
Standard Condition: E11

E.4 Erosion and Sediment Controls – Maintenance

The *principal contractor* or *owner builder* must maintain water pollution, erosion and sedimentation controls in accordance with:

- a) The Soil and Water Management Plan required under this consent;
- b) “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c) “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition (“*The Blue Book*”).

Where there is any conflict *The Blue Book* takes precedence.



Note 1: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the Protection of the Environment Operations Act 1997 without any further warning. It is a criminal offence to cause, permit or allow pollution.

Note 2: Section 257 of the Protection of the Environment Operations Act 1997 provides that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”. **Warning,** irrespective of this condition any person occupying the site may be subject to proceedings under the Protection of the Environment Operations Act 1997 where pollution is caused, permitted or allowed as the result of the occupation of the land being developed whether or not they actually cause the pollution.
Standard Condition: E15

E.5 Disposal of site water during construction

The principal contractor or owner builder must ensure:

- a) Prior to pumping any water into the road or public stormwater system that approval is obtained from *Council* under section 138(1)(d) of the *Roads Act* 1993;
- b) That *water pollution*, as defined by the *Protection of the Environment Operations Act* 1997, does not occur as the result of the discharge to the road, public stormwater system or other place or any site water;
- c) That stormwater from any roof or other impervious areas is linked, via temporary downpipes and stormwater pipes, to a Council approved stormwater disposal system immediately upon completion of the roof installation or work creating other impervious areas.

Note: This condition has been imposed to ensure that adjoining and neighbouring land is not adversely affected by unreasonable overland flows of stormwater and that site water does not concentrate water such that they cause erosion and water pollution.
Standard Condition: E17

E.6 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

E.7 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

E.8 Requirement to notify about new evidence

Any new information which comes to light during remediation, demolition or construction works which has the potential to alter previous conclusions about site contamination, heritage significance, threatened species or other relevant matters must be immediately notified to Council and the Principal Certifying Authority.

Standard Condition: E4

E.9 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any PCA Service Agreement.

Note: The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

Note: The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.
Standard Condition: E5

E.10 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piling, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

Note: The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

Note: Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

Note: The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.

Note: Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

Note: EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm> .

Note: see http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf
Standard Condition: E6

E.11 Tree Condition

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan.

The raised planter bed for the specimen *Magnolia grandiflora*, located within the soft fall play area to be increased to 4 metres in diameter.

E.12 Filling of site

To the extent that this consent permits filling of the site such fill must be *virgin excavated natural material* (“VENM”).

VENM means “*Virgin excavated natural material (such as clay, gravel, sand, soil and rock) that is not mixed with any other type of waste and which has been excavated from areas of land that are not contaminated with human-made chemicals as a result of industrial, commercial, mining or agricultural activities and which do not contain sulphidic ores or soils.*”

Note: This definition is the same as in Schedule 1 of the *Protection of the Environment Operations Act 1997*, Appendix IX: Types of waste.

Note: Sulphidic ores and soils are commonly known as Acid Sulphate Soils.

Note: If a person transports waste to a place (the site) that cannot lawfully be used as a waste facility for that waste: (a) the person, and, (b) if the person is not the owner of the waste, the owner, are each guilty of an offence under section 143 of the *Protection of the Environment Operations Act 1997*.

Note: A person who is the owner or occupier (principal contractor) of any land that cannot lawfully be used as a waste facility and who permits the land to be used as a waste facility is guilty of an offence under section 144 of the *Protection of the Environment Operations Act 1997*.

Note: Additional information is available from the following websites:

Illegal waste dumping - <http://www.epa.nsw.gov.au/waste/dumping.htm>

Is that fill legal? <http://www.epa.nsw.gov.au/resources/012648web.epa%20fill.dl%20bro.pdf>
Standard Condition: E18

E.13 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988* (Cth).

No illuminated sign(s) must be erected upon or displayed upon any site crane.

Note: Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

Note: Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.
Standard Condition: E19

E.14 Check Surveys - boundary location, building location, building height and stormwater drainage system relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA*'s satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.

Note: This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.
Standard Condition: E20

E.15 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.
Standard Condition: E21

E.16 Dust Mitigation

Dust mitigation must be implemented in accordance with "*Dust Control - Do it right on site*" published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.

- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

Note 1: “Dust Control - Do it right on site” can be down loaded free of charge from Council’s web site www.woollahra.nsw.gov.au or obtained from Council’s office.

Note 2: Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.workcover.nsw.gov.au and www.epa.nsw.gov.au . Other specific condition and advice may apply.

Note 3: Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.
Standard Condition: E23

F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)

F.1 Commissioning and Certification of Systems and Works

The *principal contractor* or *owner builder* must submit to the satisfaction of the *PCA* works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* confirming that the *works*, as executed and as detailed, comply with the requirement of this consent, the *Act*, the *Regulations*, any relevant *construction certificate*, the *BCA* and relevant *Australian Standards*.

Works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* must including but may not be limited to:

- a. Certification from the supervising professional engineer that the requirement of the Geotechnical / Hydrogeological conditions and report recommendations were implemented and satisfied during development work.
- b. All flood protection measures.
- c. All garage/car park/basement car park, driveways and access ramps comply with Australian Standard AS 2890.1 – “Off-Street car parking.”
- d. All stormwater drainage systems.
- e. All mechanical ventilation systems.
- f. All hydraulic systems.
- g. All structural work.
- h. All acoustic attenuation work.
- i. All waterproofing.
- j. Such further matters as the *Principal Certifying Authority* may require.

Note: This condition has been imposed to ensure that systems and works as completed meet *development standards* as defined by the *Act*, comply with the *BCA*, comply with this consent and so that a public record of works as execute is maintained.

Note: The *PCA* may require any number of WAE plans, certificates, or other evidence of suitability as necessary to confirm compliance with the *Act*, *Regulation*, *Development Standards*, *BCA*, and relevant *Australia Standards*. As a minimum WAE plans and certification is required for stormwater drainage and detention, mechanical ventilation work, hydraulic services (including but not limited to fire services).

Note: The *PCA* must submit to Council, with any *Occupation Certificate*, copies of works-as-executed (“WAE”) plans, *Compliance Certificates* and evidence of suitability in accordance with Part A2.2 of the *BCA* upon which the *PCA* has relied in issuing any *Occupation Certificate*.
Standard Condition: F7

F.2 Occupation Certificate (section 109M of the Act)

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

Note: New building includes an altered portion of, or an extension to, an existing building.
Standard Condition: F1

G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate

None relevant.

H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))

H.1 Landscaping

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the approved landscape plan, arborist report, transplant method statement and tree management plan. The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

Note: This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*.
Standard Condition: H9

H.2 Removal of Ancillary Works and Structures

The *principal contractor* or *owner* must remove from the land and any adjoining public place:

- a. The site sign;
- b. Ablutions;
- c. Hoarding;
- d. Scaffolding; and
- e. Waste materials, matter, article or thing.

Note: This condition has been imposed to ensure that all ancillary matter is removed prior to the issue of the *Final Occupation Certificate*.
Standard Condition: H12

H.3 Positive Covenant & Works-As-Executed certification of stormwater systems

On completion of construction work, stormwater drainage works are to be certified by a *professional engineer* with Works-As-Executed drawings supplied to the *PCA* detailing:

- a. compliance with conditions of development consent relating to stormwater;
- b. the structural adequacy of the On-Site Detention system (OSD);

- c. that the works have been constructed in accordance with the approved design and will provide the detention storage volume and attenuation in accordance with the submitted calculations;
- d. Pipe invert levels and surface levels to Australian Height Datum; and
- e. Contours indicating the direction in which water will flow over land should the capacity of the pit be exceeded in a storm event exceeding design limits.
- f. A positive covenant pursuant to Section 88E of the *Conveyancing Act 1919* must be created on the title of the subject property, providing for the indemnification of Council from any claims or actions and for the on-going maintenance of the on-site-detention system and/or absorption trenches, including any pumps and sumps incorporated in the development. The wording of the Instrument must be in accordance with Council's standard format and the Instrument must be registered at the Land Titles Office.

Note: The required wording of the Instrument can be downloaded from Council's web site www.woollahra.nsw.gov.au. The PCA must supply a copy of the WAE Plans to Council together with the *Final Occupation Certificate*. The *Final Occupation Certificate* must not be issued until this condition has been satisfied.
Standard Condition: H20

I. Conditions which must be satisfied during the ongoing use of the development

I.1 Provision of off-street Public and Visitor Parking

The owner and occupier, in compliance with AS/NZS 2890.1:2004: Parking facilities - Off-street car parking, must maintain unimpeded public access to off-street parking.

I.2 Maintenance of Landscaping

All landscaping must be maintained in general accordance with this consent.

This condition does not prohibit the planting of additional trees or shrubs subject that they are native species endemic to the immediate locality.

Reason: This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

Note: This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled "Local Native Plants for Sydney's Eastern Suburbs" published by Woollahra, Waverley, Randwick and Botany Bay Councils.
Standard Condition: I8

I.3 Noise Control

The use of the premises must not give rise to the transmission of *offensive noise* to any place of different occupancy. *Offensive noise* is defined in the *Protection of the Environment Operations Act 1997*.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Council will generally enforce this condition in accordance with the *Noise Guide for Local Government* (<http://www.environment.nsw.gov.au/noise/nglg.htm>) and the *Industrial Noise Guidelines* (<http://www.environment.nsw.gov.au/noise/industrial.htm>) published by the Department of Environment and Conservation. Other state government authorities also regulate the *Protection of the Environment Operations Act 1997*.

Useful links:

Community Justice Centres—free mediation service provided by the NSW Government (www.cjc.nsw.gov.au).

Department of Environment and Conservation NSW, Noise Policy Section web page (www.environment.nsw.gov.au/noise).

New South Wales Government Legislation home page for access to all NSW legislation, including the *Protection of the Environment Operations Act 1997* and the *Protection of the Environment Noise Control Regulation 2000* (www.legislation.nsw.gov.au).

Australian Acoustical Society—professional society of noise-related professionals (www.acoustics.asn.au/index.php).

Association of Australian Acoustical Consultants—professional society of noise related professionals (www.aaac.org.au).

Department of Gaming and Racing - (www.dgr.nsw.gov.au).
Standard Condition: I50

I.4 Noise from mechanical plant and equipment

Noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Words in this condition have the same meaning as in the:
NSW Industrial Noise Policy (http://www.environment.nsw.gov.au/resources/ind_noise.pdf) ISBN 0 7313 2715 2, dated January 2000, and
Noise Guide for Local Government (<http://www.environment.nsw.gov.au/noise/nglg.htm>) ISBN 1741370671, dated December 2004.
Standard Condition: I53

J. Miscellaneous Conditions

None relevant.

K. Advisings

K.1 Fire Advising

1. The Principal Certifying Authority shall submit to Council a fire safety schedule indicating fire safety measures to be installed within the building. The fire safety schedule shall be submitted with the notice of proposed commencement required by (s) 81A of the Environmental Planning and Assessment Act 1979 no later than 2 days prior the beginning of any work.

2. A copy of the final fire safety certificate shall be submitted to the Commissioner of the New South Wales Fire Brigades and displayed within the building as soon as practical after the completion of the works.
3. Within 12 months after the final fire safety certificate is issued an annual fire safety statement dealing with each essential fire safety measure in the building shall be submitted to council, the Commissioner of the New South Wales Fire Brigades and displayed in the building in accordance with the requirements of Clause 177 of the Environmental Planning and Assessment Regulation 2000.

K.2 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's www.agd.nsw.gov.au.

Standard Advising: K1

K.3 Dial before you dig



The *principal contractor*, *owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit www.dialbeforeyoudig.com.au.

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

K.4 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appointed a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder): <http://www.dft.nsw.gov.au/building.html> .

The Owner(s) must appoint the PCA. The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

K.5 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a “Guide to Standards and Tolerances©” ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

K.6 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: Further information can be obtained from Workcover NSW's website: <http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office: Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145. Standard Condition: K7

K.7 Asbestos Removal, Repair or Disturbance

Anyone who removes, repairs or disturbs bonded or a friable asbestos material must hold a current removal licence from Workcover NSW.

Before starting work, a work site-specific permit approving each asbestos project must be obtained from Workcover NSW. A permit will not be granted without a current Workcover licence.

All removal, repair or disturbance of or to asbestos material must comply with:

- The Occupational Health and Safety Act 2000;
- The Occupational Health and Safety Regulation 2001;
- The Code of Practice for the Safe Removal of Asbestos [NOHSC: 2002 (1998)];
- The Guide to the Control of Asbestos Hazards in Buildings and Structures [NOHSC: 3002 (1998)] <http://www.nohsc.gov.au/>; and
- The Workcover NSW Guidelines for Licensed Asbestos Removal Contractors.

Note: The Code of Practice and Guide referred to above are known collectively as the Worksafe Code of Practice and Guidance Notes on Asbestos. They are specifically referenced in the Occupational Health and Safety Regulation 2001 under Clause 259. Under the Occupational Health and Safety Regulation 2001, the Worksafe Code of Practice and Guidance Notes on Asbestos are the minimum standards for asbestos removal work. Council does not control or regulate the Worksafe Code of Practice and Guidance Notes on Asbestos. You should make yourself aware of the requirements by visiting www.workcover.nsw.gov.au or one of Workcover NSW's offices for further advice. Standard Advising: K8

K.8 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

Mr D Waghorn, Senior Assessment Officer on (02) 9391 7138

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

K.9 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>

Standard Condition: K15

K.10 Recycling of Demolition and Building Material

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

K.11 Pruning or Removing a Tree Growing on Private Property

Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) may require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website www.woollahra.nsw.gov.au or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

K.12 Commonwealth Disability Discrimination Act 1992 (“DDA”)

The Disability Discrimination Act 1992 (DDA) makes it against the law for public places to be inaccessible to people with a disability. Compliance with this development consent, Council’s Access DCP and the BCA does not necessarily satisfy compliance with the DDA.

The DDA applies to existing places as well as places under construction. Existing places must be modified and be accessible (except where this would involve "unjustifiable hardship”).

Further detailed advice can be obtained from the Human Rights and Equal Opportunity Commission (“HEROC”):

- <http://www.hreoc.gov.au/index.html>
- http://www.hreoc.gov.au/disability_rights/dda_guide/ins/ins.html

If you have any further questions relating to the application of the DDA you can send an email to HEROC at disabdis@humanrights.gov.au.

Standard Advising: K3

D7 DA442/2007 – 22A Tivoli Avenue, Rose Bay – Alterations & additions to existing dwelling-house, swimming pool & pool terrace – Landscaping works – 5/7/2007

Note: George Benson of Benson & Partners Pty Ltd addressed the Committee.

(Rundle/Shoebridge)

Resolved: Pursuant to Section 80(1) of the Environmental Planning and Assessment Act, 1979

THAT the Council, as the consent authority, is of the opinion that the objection under *State Environmental Planning Policy No. 1 – Development Standards* to FSBL–development standard under Clause 22 is well founded. The Council is also of the opinion that strict compliance with the development standard is unreasonable and unnecessary in the circumstances of this case as the proposal, conditioned, will not have a detrimental impact on the harbour and foreshore areas.

AND

THAT the Council, as the consent authority, being satisfied that the objection under SEPP No. 1 is well founded and also being of the opinion that the granting of consent to Development Application No. 442/2007 is consistent with the aims of the Policy, grant development consent to DA No. 442/2007 for alterations and additions to the existing dwelling-house, swimming pool and pool terrace and landscaping works on land at 22A Tivoli Avenue, Rose Bay, subject to the following conditions:

A. General Conditions

A.1 Conditions

Consent is granted subject to the following conditions imposed pursuant to section 80 of the Environmental Planning & Assessment Act 1979 (“the *Act*”) and the provisions of the Environmental Planning and Assessment Regulation 2000 (“the *Regulation*”) such conditions being reasonable and relevant to the development as assessed pursuant to section 79C of the Act.

Standard Condition: A1

A.2 Definitions

Unless specified otherwise words have the same meaning as defined by the *Act*, the *Regulation* and the *Interpretation Act 1987* as in force at the date of consent.

Applicant means the applicant for this Consent.

Approved Plans mean the plans endorsed by Council referenced by this consent as amended by conditions of this consent.

AS or *AS/NZS* means Australian Standard® or Australian/New Zealand Standard®, respectively, published by Standards Australia International Limited.

BCA means the Building Code of Australia as published by the Australian Building Codes Board as in force at the date of issue of any *Construction Certificate*.

Council means Woollahra Municipal Council

Court means the Land and Environment Court

Local native plants means species of native plant endemic to Sydney’s eastern suburbs (see the brochure titled “Local Native Plants for Sydney’s Eastern Suburbs published by the Southern Sydney Regional Organisation of Councils).

Stormwater Drainage System means all works, facilities and documentation relating to:

- a. The collection of stormwater,
- b. The retention of stormwater,
- c. The reuse of stormwater,
- d. The detention of stormwater,
- e. The controlled release of stormwater; and
- f. Connections to easements and public stormwater systems.

Owner means the owner of the *site* and successors in title to the *site*.

Owner Builder has the same meaning as in the *Home Building Act 1989*.

PCA means the *Principal Certifying Authority* under the *Act*.

Principal Contractor has the same meaning as in the *Act* or where a *principal contractor* has not been appointed by the *owner* of the land being developed *Principal Contractor* means the *owner* of the land being developed.

Professional Engineer has the same meaning as in the *BCA*.

Public Place has the same meaning as in the *Local Government Act 1993*.

Road has the same mean as in the *Roads Act 1993*.

SEE means the final version of the Statement of Environmental Effects lodged by the *Applicant*.

Site means the land being developed subject to this consent.

WLEP 1995 means *Woollahra Local Environmental Plan 1995*

Work for the purposes of this consent means:

- a. the use of land in connection with development,
- b. the subdivision of land,
- c. the erection of a building,
- d. the carrying out of any work,
- e. the use of any site crane, machine, article, material, or thing,
- f. the storage of waste, materials, site crane, machine, article, material, or thing,
- g. the demolition of a building,
- h. the piling, piercing, cutting, boring, drilling, rock breaking, rock sawing or excavation of land,
- i. the delivery to or removal from the *site* of any machine, article, material, or thing, or
- j. the occupation of the *site* by any person unless authorised by an *occupation certificate*.

Note: Interpretation of Conditions - Where there is any need to obtain an interpretation of the intent of any condition this must be done in writing to Council and confirmed in writing by Council.

Standard Condition: A2

A.3 Approved Plans and supporting documents

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp “Approved DA Plans” **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
01 – 09 Issue A	Floor Plans, Elevations and Sections	Bensen Partners Architects	July 07
10 Issue A	Landscape Plan	Bensen + Partners	July 2007
A13543	BASIX Certificate	Department of Planning	28 June 2007

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)

Standard Condition: A5

A.4 General Terms of Approval – Water Management Act 2000 (Maritime)

The following general terms of approval have been imposed by the NSW Maritime Authority:

1. The works to which these general terms of approval apply are not to commence until such time as NSW Maritime has issued a Part3A Permit under the Rivers and Foreshores Improvement Act 1948.
2. The proposed works are to be carried out so that:
 - a) no materials are eroded, all likely to be eroded, are deposited, or likely to be deposited, on the bed or shore or into the waters of Rose Bay; and
 - b) no materials are likely to be carried by natural forces to the bed, shore or waters of Rose Bay
3. Any material that does enter Rose Bay must be removed immediately
4. In relation to Conditions 2 and 3 above, a plan to manage erosion, sediment and other pollutants at the site, particularly for works on the foreshore level is to be prepared by a suitably qualified person(s). A suitable plan is to be submitted to NSW Maritime prior to a Part 3A Permit being issued.

Best practice methods shall be adopted for the on-site control of runoff, sediment and other pollutants during, and post, construction. Methods shall be in accordance with the relevant specifications and standards contained in the manual *Managing Urban Stormwater-Soils and Construction* issued by the NSW Department of Housing in 1998 and any other relevant council requirements.

5. The erosion, sediment and pollution controls shall be installed and stabilised before commencement of site works. This does not include the works associated with the construction of the appropriate controls.
6. The proposed system for erosion, sediment and pollution control is to be effectively maintained at or above design capacity for the duration of the works and until such time as all ground disturbed by the works has been stabilised and rehabilitated so that it no longer acts as a source of sediment.
7. Any material that is to be stockpiled on-site is to be stabilised to prevent erosion or dispersal of the material
8. landscaping is to be comprised of locally indigenous species, which represent the original plant communities that would have been found along the shoreline in the vicinity of the subject land.
9. Any trees that are removed during the works are to be replaced elsewhere on the site with a suitable replacement. Replacement trees are to be of locally indigenous species.
10. In relation to 8 and 9 above, a suitable landscape plan is to be provided to NSW Maritime prior to a Part 3A Permit being issued. The plan is to identify the location and species of trees at the site; measures to protect them from damage during the works and details of additional landscaping to be carried out, including species, numbers and location.

11. The foreshore and inter-tidal area are to be fully protected for the duration of the works. This includes preventing the storage of any machinery, materials, equipment, supplies or waste receptacles within the inter-tidal area.
12. Limited information has been provided regarding access for the proposed works. If access for construction and materials is to be sought via the foreshore (i.e. barge) then a comprehensive construction management plan is to be prepared by suitably qualified individuals and submitted to the satisfaction of NSW Maritime. The Plan should include, but not be limited to, measures that demonstrate:
 - a. The protection of sensitive inter-tidal areas through access and egress of the barge and associated activities (such as propeller damage, lines, anchor points, length of stay etc).
 - b. The management of disturbed foreshore lands to avoid any sediment entering the waterway.
 - c. Siltation management through the implementation of suitable controls (such as floating boom and silt curtains).
 - d. Post construction works to restore and stabilise the intertidal area.
 - e. Measures are in place to audit the environmental performance of the construction management and what approach is to be used for responding to an issue.
13. No works are to be undertaken on land owned by NSW Maritime without the relevant approvals being granted by NSW Maritime.

Note: These conditions have not been imposed by Council but are required to be incorporated as conditions of development consent. Where there is any inconsistency between these general terms of approval and other conditions of this consent the more onerous requirement prevails.
Standard Condition: A17

B. Conditions which must be satisfied prior to the demolition of any building or construction

B.1 Construction Certificate required prior to any demolition

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.
Standard Condition: B1

C. Conditions which must be satisfied prior to the issue of any construction certificate

C.1 Modification of details of the development (s80A(1)(g) of the Act)

The *approved plans* must be amended and the *Construction Certificate* plans and specification, required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation*, must detail:

- a. the works to the sea wall outside of the site boundaries are not approved and are to be deleted as the owner's consent has not been provided. A separate application is to be made to NSW Maritime for these works
- b. amendments to works fronting the harbour:
 - i. the sea wall is to remain at the existing height and the section of new sandstone sea wall fronting the Harbour that is within the site boundaries is to be deleted
 - ii. the proposed gazebo at Pool Deck level is to be deleted and this area where the gazebo is deleted is to consist of additional deep soil landscaping
 - iii. the landscaping fronting the Harbour adjacent to the sea wall is to be retained

These amendments are to minimise the visual impact of the development as viewed from the Harbour and foreshore areas in accordance with the provisions of SREP (Sydney Harbour Catchment) 2005 and Objectives O 5.3.2 and O 5.11.1 and Performance Criterion C 5.3.2 and C 5.11.23 of WRDCP 2003

- c. the garage roof is to be a flat metal deck roof of a dark recessive colour and is to be non-trafficable so as to minimise any glare or amenity impacts to neighbouring properties

Note: The effect of this condition is that it requires design changes and/or further information to be provided with the *Construction Certificate* drawings and specifications to address specific issues identified during assessment under section 79C of the *Act*.

Note: Clause 146 of the *Regulation* prohibits the issue of any *Construction Certificate* subject to this condition unless the *Certifying Authority* is satisfied that the condition has been complied with.

Note: Clause 145 of the *Regulation* prohibits the issue of any *Construction Certificate* that is inconsistent with this consent.
Standard Condition: C4

C.2 Payment of Security, Levies and Fees (S80A(6) & S94 of the Act, Section 608 of the Local Government Act 1993)

The person(s) with the benefit of this consent must pay the following long service levy, security, development levy, and fees prior to the issue of any *construction certificate*, *subdivision certificate* or *occupation certificate*, as will apply.

The *certifying authority* must not issue any *Part 4A Certificate* until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees. Specifically

- a. prior to the issue of a *construction certificate*, where a construction certificate is required; or
- b. prior to the issue of a *subdivision certificate*, where only a subdivision certificate is required; or
- c. prior to the issue of an *occupation certificate* in any other instance.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under Building and Construction Industry Long Service Payments Act 1986			
Long Service Levy Use Calculator: http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm	Contact LSL Corporation or use their online calculator	No	
SECURITY under section 80A(6) of the Environmental Planning and Assessment Act 1979			
Property Damage Security Deposit - Making good any damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates.	\$5,500	No	T115
DEVELOPMENT LEVY under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website www.woollahra.nsw.gov.au .			
Development Levy (S94A)	\$875 + Index Amount	Yes, quarterly	T96
INSPECTION FEES under section 608 of the Local Government Act 1993			
Public Tree Management Inspection Fee	\$55	No	T95
Security Administration Fee	\$168	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES		\$6,598	Plus any relevant indexed amounts and long service levy

Building & Construction Industry Long Service Payment

The Long Service Levy under Section 34 of the *Building & Construction Industry Long Service Payment Act, 1986*, must be paid and proof of payment provided to the *Certifying Authority* prior to the issue of any *Construction Certificate*.

Note: The Levy can be paid directly to the Long Services Payments Corporation or to Council. Further information can be obtained from the Long Service Payments Corporation's website <http://www.lspc.nsw.gov.au/> or by telephoning the Long Service Payments Corporation on 13 14 41.

How must the payments be made?

Payments must be made by:

- a. Cash deposit with Council,
- b. Credit card payment with Council, or
- c. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 94A levy be indexed?

To ensure that the value the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

Do you need HELP indexing the levy?

Please contact our customer service officers. Failure to correctly calculate the adjusted the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a. the reasons given;
- b. whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c. whether any prejudice will be caused to the efficacy and operation of this plan; and
- d. whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a. the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b. the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c. the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d. the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

Standard Condition: C5

C.3 BASIX commitments

The *applicant* must submit to the *Certifying Authority BASIX Certificate* No.A13543 with any application for a *Construction Certificate*.

Note: Where there is any proposed change in the BASIX commitments the applicant must submit of a new *BASIX Certificate* to the *Certifying Authority* and Council. If any proposed change in the BASIX commitments are inconsistent with development consent (See: Clauses 145 and 146 of the *Regulation*) the applicant will be required to submit an amended development application to *Council* pursuant to section 96 of the Act.

All commitments in the *BASIX Certificate* must be shown on the *Construction Certificate* plans and specifications prior to the issue of any *Construction Certificate*.

Note: Clause 145(1)(a1) of the *Environmental Planning & Assessment Regulation 2000* provides: "A certifying authority must not issue a construction certificate for building work unless it is satisfied of the following matters: (a1) that the plans and specifications for the building include such matters as each relevant BASIX certificate requires,"
Standard Condition: C7

C.4 Amended Landscape Plan

An Amended Landscape Plan, prepared by a qualified Landscape Architect or Landscape Designer, to a scale of 1:100 or 1:200, conforming to the conditions of this Development Consent is to be submitted to Council for approval prior to issue of the Construction Certificate. The plan must include a detailed planting schedule, which must include species listed by botanical and common names, quantities of each species, pot sizes, and the estimated size of the plant at maturity. In particular the *Construction Certificate* plans and specifications, as required by clause 139 of the *Regulation* must, show the following information;

- a. all plant species within the subject site is to comprise of locally indigenous (endemic) flora species. If suitable endemic stock is not able to be sources or propagated, native plants naturally found within the Sydney Basin will be appropriate substitutes;
- b. landscape specifications are to include a clause stating that all tree species purchased for installation on site are to be in accordance with NATSPEC;
- c. inclusion of a minimum of 2 tree specimens (including the specimen required by TPO 562/2005). Tree species to be locally indigenous (endemic) species, suitable to aid in screening the proposal from the street and neighbouring properties. Species selection should be restricted to small to medium tree species with a maximum expected height of 8.0m;
- d. specifications for site irrigation systems/watering regimes to be modified so that it is in accordance with Sydney Water's water restrictions;
- e. inclusion of adequate soil amelioration. Please note that soil amelioration is preferred
- f. to soil importation.

C.5 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

Note: This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.
Standard Condition: C35

C.6 Professional Engineering Details

The *Construction Certificate* plans and specifications, required by clause 139 of the *Regulation*, must include detailed *professional engineering* plans and/or specifications for all structural, electrical, hydraulic, hydro-geological, geotechnical, mechanical and civil work complying with this consent, approved plans, the statement of environmental effects and supporting documentation.

Detailed professional engineering plans and/or specifications must be submitted to the *Certifying Authority* with the application for any *Construction Certificate*.

Note: This does not affect the right of the developer to seek staged Construction Certificates
Standard Condition: C36

C.7 Soil and Water Management Plan – Submission & Approval

The *principal contractor* or *owner builder* must submit to the *Certifying Authority* a soil and water management plan complying with:

- a. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- b. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (*The Blue Book*).

Where there is any conflict *The Blue Book* takes precedence. The *Certifying Authority* must be satisfied that the soil and water management plan complies with the publications above prior to issuing any *Construction Certificate*.

Note: This condition has been imposed to eliminate potential water pollution and dust nuisance.

Note: The International Erosion Control Association – Australasia <http://www.austieca.com.au/> lists consultant experts who can assist in ensuring compliance with this condition. Where erosion and sedimentation plans are required for larger projects it is recommended that expert consultants produce these plans.

Note: The “*Do it Right On Site, Soil and Water Management for the Construction Industry*” publications can be down loaded free of charge from <http://www.woollahra.nsw.gov.au/>.

Note: Pursuant to clause 161(1)(a)(5) of the *Regulation* an *Accredited Certifier* may satisfied as to this matter.
Standard Condition: C25

C.8 Geotechnical and Hydrogeological Design, Certification & Monitoring

The *Construction Certificate* plans and specification required to be submitted to the *Certifying Authority* pursuant to clause 139 of the *Regulation* must be accompanied by a *Geotechnical / Hydrogeological Monitoring Program* together with civil and structural engineering details for foundation retaining walls, footings, basement tanking, and subsoil drainage systems, as applicable, prepared by a *professional engineer*, who is suitably qualified and experienced in geotechnical and hydrogeological engineering. These details must be certified by the *professional engineer* to:

- a. Provide appropriate support and retention to ensure there will be no ground settlement or movement, during excavation or after construction, sufficient to cause an adverse impact on adjoining property or public infrastructure.
- b. Provide appropriate support and retention to ensure there will be no adverse impact on surrounding property or infrastructure as a result of changes in local hydrogeology (behaviour of groundwater).
- c. Provide foundation tanking prior to excavation such that any temporary changes to the groundwater level, during construction, will be kept within the historical range of natural groundwater fluctuations. Where the historical range of natural groundwater fluctuations is unknown, the design must demonstrate that changes in the level of the natural water table, due to construction, will not exceed 0.3m at any time.
- d. Provide tanking of all below ground structures to prevent the entry of all ground water such that they are fully tanked and no on-going dewatering of the site is required.

- e. Provide a Geotechnical and Hydrogeological Monitoring Program that:
- i. Will detect any settlement associated with temporary and permanent works and structures;
 - ii. Will detect deflection or movement of temporary and permanent retaining structures (foundation walls, shoring bracing or the like);
 - iii. Will detect vibration in accordance with AS 2187.2-1993 Appendix J including acceptable velocity of vibration (peak particle velocity);
 - iv. Will detect groundwater changes calibrated against natural groundwater variations;

details:

- the location and type of monitoring systems to be utilised;
- the preset acceptable limits for peak particle velocity and ground water fluctuations;
- recommended hold points to allow for the inspection and certification of geotechnical and hydro-geological measures by the professional engineer; and
- a contingency plan.

Standard Condition: C40

C.9 Stormwater Discharge to Harbour (Clause 25(2) WLEP 1995)

The developer must obtain written approval from the NSW Maritime Authority to discharge stormwater from the subject property directly into Sydney Harbour.

Standard Condition: C50

D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following conditions are prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which *the Home Building Act 1989* requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:


- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4),
- or
- b. to the erection of a temporary building.

In this condition, a reference to the *BCA* is a reference to that code as in force on the date the application for the relevant construction certificate is made.


Note: This condition must be satisfied prior to commencement of any work in relation to the contract of insurance under the Home Building Act 1989. This condition also has effect during the carrying out of all building work with respect to compliance with the Building Code of Australia.
Standard Condition: D1

D.2 Security Fencing, Hoarding and Overhead Protection

Security fencing must be provided around the perimeter of the development site, including any additional precautionary measures taken to prevent unauthorised entry to the site at all times during the demolition, excavation and construction period. Security fencing must be the equivalent 1.8m high chain wire as specified in AS 1725.

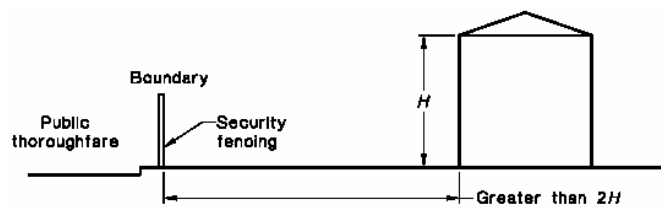

Where the development site adjoins a public thoroughfare, the common boundary between them must be fenced for its full length with a hoarding, unless the least horizontal distance between the common boundary and the nearest parts of the structure is greater than twice the height of the structure. The hoarding must be constructed of solid materials (chain wire or the like is not acceptable) to a height of not less than 1.8 m adjacent to the thoroughfare.

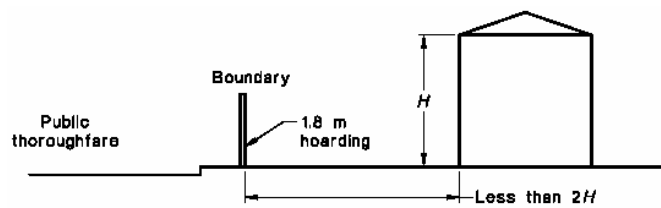


Where a development site adjoins a public thoroughfare with a footpath alongside the common boundary then, in addition to the hoarding required above, the footpath must be covered by an *overhead protective structure* and the facing facade protected by heavy-duty scaffolding, unless either

- a. the vertical height above footpath level of the structure being demolished is less than 4.0 m; or
- b. the least horizontal distance between footpath and the nearest part of the structure is greater than half the height of the structure.

The overhead structure must consist of a horizontal platform of solid construction and vertical supports, and the platform must

- a. extend from the common boundary to 200mm from the edge of the carriageway for the full length of the boundary;
- b. have a clear height above the footpath of not less than 2.1 m; terminate 200mm from the edge of the carriageway (clearance to be left to prevent impact from passing vehicles) with a continuous solid upstand projecting not less than 0.5 m above the platform surface; and
- c. together with its supports, be designed for a uniformly distributed live load of not less than 7 kPa.

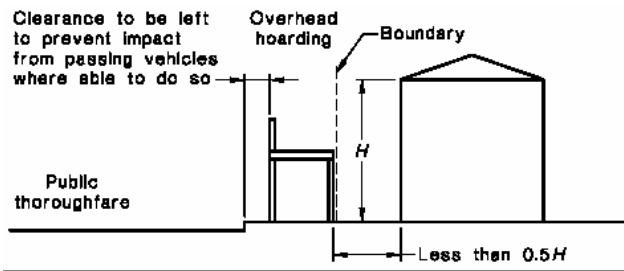

The *principal contractor* or *owner builder* must pay all fees associated with the application and occupation and use of the road (footway) for required hoarding or overhead protection.

The *principal contractor* or *owner builder* must ensure that Overhead Protective Structures are installed and maintained in accordance with WorkCover NSW Code of Practice - Overhead Protective Structures, gazetted 16 December 1994, as commenced 20 March 1995. This can be downloaded from:

<http://www.workcover.nsw.gov.au/Publications/LawAndPolicy/CodesofPractice/oheadprotstruucts.htm>.

Security fencing, hoarding and overhead protective structure must not obstruct access to utilities services including but not limited to man holes, pits, stop valves, fire hydrants or the like.

Note: The *principal contractor* or *owner* must allow not less than two (2) weeks from the date of making a hoarding application for determination. Any approval for a hoarding or overhead protection under the *Roads Act 1993* will be subject to its own conditions and fees.
Standard Condition: D11

D.3 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

“Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - a. showing the name, address and telephone number of the principal certifying authority for the work, and
 - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.
4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the *Act*, to comply with the technical provisions of the State’s building laws.”

Note: *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

Note: If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.
Standard Condition: D12

D.4 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
 - i. appointed a principal certifying authority for the building work, and
 - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
 - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
 - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
 - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - ii. notified the principal certifying authority of any such appointment, and
 - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: *Construction Certificate* Application, *PCA Service Agreement* and *Notice of Commencement* forms can be downloaded from Council's website www.woollahra.nsw.gov.au .

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the Act.
Standard Condition: D15

D.5 Notification of Home Building Act 1989 requirements

- a. For the purposes of section 80A (11) of the Act, the requirements of this condition are prescribed as conditions of a development consent for development that involves any residential building work within the meaning of the Home Building Act 1989.
- b. Residential building work within the meaning of the Home Building Act 1989 must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the following information:
 - i. in the case of work for which a *principal contractor* is required to be appointed:
 - the name and licence number of the principal contractor, and
 - the name of the insurer by which the work is insured under Part 6 of that Act,
 - ii. in the case of work to be done by an owner-builder:
 - the name of the owner-builder, and
 - if the owner-builder is required to hold an owner-builder permit under that Act, the number of the owner-builder permit.
- c. If arrangements for doing the residential building work are changed while the work is in progress so that the information notified under subclause (2) becomes out of date, further work must not be carried out unless the principal certifying authority for the development to which the work relates (not being the council) has given the council written notice of the updated information.
- d. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws.
Standard Condition: D17

D.6 Establishment of boundary location, building location and datum

Prior to the commencement of any work the principal contractor or owner builder must ensure that a surveyor registered under the *Surveying Act 2002* sets out:

- a. the boundaries of the *site* by permanent marks (including permanent recovery points);
- b. the location and level of foundation excavations, footings, walls and slabs by permanent marks, pegs or profiles relative to the boundaries of the land and relative to Australian Height Datum ("AHD") in compliance with the approved plans;
- c. establishes a permanent datum point (bench mark) within the boundaries of the *site* relative to AHD; and
- d. provides a copy of a survey report by the registered surveyor detailing, the title boundaries, pegs/profiles, recovery points and bench mark locations as established pursuant to this condition to the PCA.

Note: Where the *principal contractor* or *owner builder* notes any discrepancy between the approved development consent and the *Construction Certificate*, especially in relation to the height, location or external configuration of the building (but not limited to these issues) the *principal contractor* or *owner builder* should not proceed until satisfied that the variations as shown are consistent with the consent. Failure to do so may result in a breach of development consent.

Note: On larger developments, or where boundary redefinition is required, the placement of new State Survey Marks as permanent marks should be considered by the registered surveyor.
Standard Condition: D18

D.7 Construction Management Plan

As a result of the site constraints, limited space and access a Construction Management Plan is to be submitted to Council. Due to the lack of on-street parking availability a Work Zone may be required from Council during construction.

A construction management plan must be submitted and approved by Council's Development Engineer. The plan must:-

- a. describe the anticipated impact of the construction works on:**
 - local traffic routes
 - pedestrian circulation adjacent to the building site
 - and on-street parking in the local area, and;
- b. describe the means proposed to:**
 - manage construction works to minimise such impacts,
 - provide for the standing of vehicles during construction,
 - provide for the movement of trucks to and from the site, and deliveries to the site, and;
- c. show the location of:**
 - any site sheds and any anticipated use of cranes and concrete pumps,
 - any areas of Council property on which it is proposed to install a Works Zone (Construction Zone),
 - structures to be erected such as hoardings, scaffolding or shoring,
 - any excavation.
- d. describe the excavation impact on the area including**
 - Number and types of trucks to be used
 - Time frame
 - Streets to be used
 - Routes to be taken
 - Directions of travel
 - Truck storage areas
 - It is recommended that vehicle routes be shared
 - Excavation is to only be carried out outside peak and school hours between 9.30am to 2.30pm week days
 - The CMP is to include both demolition and excavation works.
- e. show the location** of all Tree Protection (Exclusion) Zones as required within the conditions of this development consent.

The Plan must make provision for all materials, plant, etc. to be stored within the development site at all times during construction. Structures or works on Council property such as hoardings, scaffolding, shoring or excavation need separate approval from Council. Standing of cranes and concrete pumps on Council property will need approval on each occasion.

Note: A minimum of eight weeks will be required for assessment. Work must not commence until the Construction Management Plan is approved. Failure to comply with this condition may result in fines and proceedings to stop work.
Standard Condition: D9

D.8 Erosion and Sediment Controls – Installation

The *principal contractor* or *owner builder* must install and maintain water pollution, erosion and sedimentation controls in accordance with:

- a. The *Soil and Water Management Plan* if required under this consent;
- b. “*Do it Right On Site, Soil and Water Management for the Construction Industry*” published by the Southern Sydney Regional Organisation of Councils, 2001; and
- c. “*Managing Urban Stormwater - Soils and Construction*” published by the NSW Department of Housing 4th Edition” (‘The Blue Book’).

Where there is any conflict The Blue Book takes precedence.

Note: The International Erosion Control Association – Australasia (<http://www.austieca.com.au/>) lists consultant experts who can assist in ensuring compliance with this condition. Where Soil and Water Management Plan is required for larger projects it is recommended that this be produced by a member of the International Erosion Control Association – Australasia.

Note: The “Do it Right On Site, Soil and Water Management for the Construction Industry” publications can be down loaded free of charge from www.woollahra.nsw.gov.au.

Note: A failure to comply with this condition may result in penalty infringement notices, prosecution, notices and orders under the Act and/or the *Protection of the Environment Operations Act 1997* **without any further warning**. It is a criminal offence to cause, permit or allow pollution.

Note: Section 257 of the *Protection of the Environment Operations Act 1997* provides inter alia that “the occupier of premises at or from which any pollution occurs is taken to have caused the pollution”
Warning, irrespective of this condition any person occupying the site may be subject to proceedings under the *Protection of the Environment Operations Act 1997* where pollution is caused, permitted or allowed as the result of their occupation of the land being developed.
Standard Condition: D14

E. Conditions which must be satisfied during any development work

E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the Act, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the Regulation, or
- b. to the erection of a temporary building.

In this clause, a reference to the BCA is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

E.2 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

E.3 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the PCA, any PCA service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

Note: The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

Note: The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the BCA in relation to any matter relevant to the development.

Standard Condition: E5

E.4 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

- Note:** The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.
- Note:** Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.
- Note:** The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement outside the approved hours of work will be considered on a case by case basis.
- Note:** Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.
- Note:** EPA Guidelines can be downloaded from <http://www.epa.nsw.gov.au/noise/nglg.htm>.
- Note:** see http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf
Standard Condition: E6

E.5 Maintenance of Vehicular and Pedestrian Safety and Access

The *principal contractor* or *owner builder* and any other person acting with the benefit of this consent must:

- a. Not erect or maintain any gate or fence swing out or encroaching upon the road or the footway.
- b. Not use the road or footway for the storage of any article, material, matter, waste or thing.
- c. Not use the road or footway for any *work*.
- d. Keep the road and footway in good repair free of any trip hazard or obstruction.
- e. Not stand any plant and equipment upon the road or footway.

This condition does not apply to the extent that a permit or approval exists under the section 73 of the *Road Transport (Safety and Traffic Management) Act 1999*, section 138 of the *Roads Act 1993* or section 94 of the *Local Government Act 1993* except that at all time compliance is required with:

- a. Australian Standard AS 1742 (Set) Manual of uniform traffic control devices and all relevant parts of this set of standards.
- b. Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Section 73 of the *Road Transport (Safety and Traffic Management) Act 1999* allows the Police to close any road or road related area to traffic during any temporary obstruction or danger to traffic or for any temporary purpose. Any road closure requires Police approval.

Note: Section 138 of the *Roads Act 1993* provides that a person must not:

- (a) erect a structure or carry out a work in, on or over a public road, or
- (b) dig up or disturb the surface of a public road, or
- (c) remove or interfere with a structure, work or tree on a public road, or
- (d) pump water into a public road from any land adjoining the road, or
- (e) connect a road (whether public or private) to a classified road, otherwise than with the consent of the appropriate roads authority.

Note: Section 68 of the *Local Government Act 1993* provides that a person may carry out certain activities only with the prior approval of the council including:

Part C Management of Waste:

- “1. For fee or reward, transport waste over or under a public place
2. Place waste in a public place
3. Place a waste storage container in a public place.”

Part E Public roads:

- “1. Swing or hoist goods across or over any part of a public road by means of a lift, hoist or tackle projecting over the footway
2. Expose or allow to be exposed (whether for sale or otherwise) any article in or on or so as to overhang any part of the road or outside a shop window or doorway abutting the road, or hang an article beneath an awning over the road.”

Any work in, on or over the Road or Footway requires *Council* Approval and in the case of classified roads the NSW Roads and Traffic Authority. Road includes that portion of the road uses as a footway.
Standard Condition: E7

E.6 Support of adjoining land and buildings

A person must not to do anything on or in relation to the *site* (the supporting land) that removes the support provided by the supporting land to any other land (the supported land) or building (the supported building).

For the purposes of this condition, supporting land includes the natural surface of the site, the subsoil of the site, any water beneath the site, and any part of the site that has been reclaimed.

Note: This condition does not authorise any trespass or encroachment upon any adjoining or supported land or building whether private or public. Where any underpinning, shoring, soil anchoring (temporary or permanent) or the like is considered necessary upon any adjoining or supported land by any person the *principal contractor* or *owner builder* must obtain:

- a) the consent of the owners of such adjoining or supported land to trespass or encroach, or
- b) an access order under the Access to Neighbouring Land Act 2000, or
- c) an easement under section 88K of the *Conveyancing Act 1919*, or
- d) an easement under section 40 of the *Land & Environment Court Act 1979* as appropriate.

Note: Section 177 of the *Conveyancing Act 1919* creates a statutory duty of care in relation to support of land. Accordingly, a person has a duty of care not to do anything on or in relation to land being developed (the supporting land) that removes the support provided by the supporting land to any other adjoining land (the supported land).

Note: Clause 20 of the *Roads (General) Regulation 2000* prohibits excavation in the vicinity of roads as follows: “**Excavations adjacent to road** - A person must not excavate land in the vicinity of a road if the excavation is capable of causing damage to the road (such as by way of subsidence) or to any work or structure on the road.” Separate approval is required under the Roads Act 1993 for any underpinning, shoring, soil anchoring (temporary) or the like within or under any road. Council will not give approval to permanent underpinning, shoring, soil anchoring within or under any road.

Note: The encroachment of work or the like is a civil matter of trespass or encroachment and Council does not adjudicate or regulate such trespasses or encroachments except in relation to encroachments upon any road, public place, crown land under Council’s care control or management, or any community or operational land as defined by the *Local Government Act 1993*.

Standard Condition: E13

E.7 Site Cranes

Site Crane(s) and hoist(s) may be erected within the boundary of the land being developed subject to compliance with Australian Standards AS 1418, AS 2549 and AS 2550 and all relevant parts to these standards.

Cranes must not swing or hoist over any public place unless the *principal contractor* or *owner builder* have the relevant approval under the *Local Government Act 1993*, *Crown Lands Act 1989* or *Roads Act 1993*.

The crane must not be illuminated outside approved working hours other than in relation to safety beacons required by the Civil Aviation Safety Authority under the *Civil Aviation Act 1988* (Cth).

No illuminated sign(s) must be erected upon or displayed upon any site crane.

Note: Where it is proposed to swing a crane over a public place the *principal contractor* or *owner builder* must make a separate application to Council under section 68 of the *Local Government Act 1993* and obtain activity approval from Council prior to swinging or hoisting over the public place.

Note: Where it is proposed to swing a crane over private land the consent of the owner of that private land is required. Alternatively, the *principal contractor* or *owner builder* must obtain an access order under the *Access to Neighbouring Land Act 2000* or easement under section 88K of the *Conveyancing Act 1919* or section 40 of the *Land & Environment Court Act 1979* as appropriate. The encroachment of cranes or the like is a civil matter of trespass and encroachment. Council does not adjudicate or regulate such trespasses or encroachments.

Standard Condition: E19

E.8 Check Surveys - boundary location, building location, building height and stormwater drainage system relative to Australian Height Datum

The *Principal Contractor* or *Owner Builder* must ensure that a surveyor registered under the *Surveying Act 2002* carries out check surveys and provides survey certificates confirming the location of the building(s) and the stormwater drainage system relative to the boundaries of the *site* and that the height of buildings and the stormwater drainage system relative to Australian Height Datum complies with this consent at the following critical stages.

The *Principal Contractor* or *Owner Builder* must ensure that work must not proceed beyond each of the following critical stages until compliance has been demonstrated to the *PCA*'s satisfaction:

- a) Upon the completion of foundation walls prior to the laying of any floor or the pouring of any floor slab and generally at damp proof course level;
- b) Upon the completion of formwork for floor slabs prior to the laying of any floor or the pouring of any concrete and generally at each storey;
- c) Upon the completion of formwork or framework for the roof(s) prior to the laying of any roofing or the pouring of any concrete roof;
- d) Upon the completion of formwork and steel fixing prior to pouring of any concrete for any ancillary structures, swimming pool or spa pool or the like;
- e) Driveway transitions and crest thresholds prior to pavement of driveways;
- f) Stormwater Drainage Systems prior to or post construction confirming location, height and capacity of works.

Note: This condition has been imposed to ensure that development occurs in the location and at the height approved under this consent.

Standard Condition: E20

E.9 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.
Standard Condition: E21

E.10 Dust Mitigation

Dust mitigation must be implemented in accordance with “*Dust Control - Do it right on site*” published by the Southern Sydney Regional Organisation of Councils.

This generally requires:

- a) Dust screens to all hoardings and site fences.
- b) All stockpiles or loose materials to be covered when not being used.
- c) All equipment, where capable, being fitted with dust catchers.
- d) All loose materials being placed bags before placing into waste or skip bins.
- e) All waste and skip bins being kept covered when not being filled or emptied.
- f) The surface of excavation work being kept wet to minimise dust.
- g) Landscaping incorporating trees, dense shrubs and grass being implemented as soon as practically possible to minimise dust.

Note 1: “*Dust Control - Do it right on site*” can be down loaded free of charge from Council’s web site www.woollahra.nsw.gov.au or obtained from Council’s office.

Note 2: Special precautions must be taken when removing asbestos or lead materials from development sites. Additional information can be obtained from www.workcover.nsw.gov.au and www.epa.nsw.gov.au . Other specific condition and advice may apply.

Note 3: Demolition and construction activities may affect local air quality and contribute to urban air pollution. The causes are dust, smoke and fumes coming from equipment or activities, and airborne chemicals when spraying for pest management. Precautions must be taken to prevent air pollution.
Standard Condition: E23

E.11 Compliance with Construction Management Plan

All development activities and traffic movements must be carried out in accordance with the approved construction management plan.

All controls in the Plan must be maintained at all times. A copy of the Plan must be kept on-site at all times and made available to the *PCA* or *Council* on request.

Note: Irrespective of the provisions of the Construction Management Plan the provisions of traffic and parking legislation prevails.
Standard Condition: E3

E.12 Compliance with Geotechnical/Hydrogeological Monitoring Program

Excavation must be undertaken in accordance with the recommendations of the *Geotechnical / Hydrogeological Monitoring Program* and any oral or written direction of the supervising *professional engineer*.

The *principal contractor* and any sub-contractor must strictly follow the *Geotechnical / Hydrogeological Monitoring Program* for the development including, but not limited to;

- a) the location and type of monitoring systems to be utilised;
- b) recommended hold points to allow for inspection and certification of geotechnical and hydrogeological measures by the *professional engineer*; and
- c) the contingency plan.

Note: The consent authority cannot require that the author of the geotechnical/hydrogeological report submitted with the Development Application to be appointed as the *professional engineer* supervising the work however, it is the Council’s recommendation that the author of the report be retained during the construction stage.

Standard Condition: E12

E.13 Tree Preservation & Approved Landscaping Works

All landscape works must be undertaken in accordance with the approved landscape plan, arborist report, tree management plan and transplant method statement as applicable.

Amended Landscape Plans as required under section C1 of these conditions is to be adhered to at all times.

E.14 Bush Regeneration

The *principal contractor* or *owner builder* must ensure that any bush located adjacent to the site is not damaged or in any way adversely affected by the proposal. Should any damage occur the bush is to be regenerated in accordance with current bush regeneration practices.

Standard Condition: E10

E.15 Removal of undesirable species and noxious weeds

The *principal contractor* or *owner builder* must (to prevent the spread of undesirable and invasive species and to ensure the preservation of urban bushland within the Municipality) remove all weeds identified within the *Noxious Weeds Act 1993* (Order No 7) and the following identified Woollahra Municipality bushland invasive plant species must be removed from the development site:

Common name	Scientific name
Alligator weed	<i>Alternanthera philoxeroides</i>
Bitou bush Boneseed	<i>Chrysanthemoides monillifera</i>
Black knapweed	<i>Centaurea nigra</i>
Blackberry	<i>Rubus fruticosus (agg. spp.)</i>
Broomrape	<i>Orobanche spp.</i>
Cabomba	<i>Cabomba spp.</i>
Castor oil plant	<i>Ricinus communis</i>
Green cestrum	<i>Cestrum parqui</i>

Harrisia cactus	<i>Harrisia spp.</i>
Hawkweed	<i>Hieracium spp.</i>
Horsetail	<i>Equisetum spp.</i>
Karoo thorn	<i>Acacia karroo</i>
Kochia	<i>Kochia scoparia</i>
Lagarosiphon	<i>Lagarosiphon major</i>
Lantana (Pink flowered)	<i>Lantana camara</i>
Lantana (Red flowered)	<i>Lantana camara</i>
Ludwigia	<i>Ludwigia peruviana</i>
Mexican feather grass	<i>Nassella tenuissima syn Stipa tenuissima</i>
Miconia	<i>Miconia spp.</i>
Pampas grass	<i>Cortaderia spp.</i>
Parthenium weed	<i>Parthenium hysterophorus</i>
Pellitory	<i>Parietaria judaica</i>
Prickly pears	<i>Opuntia spp.</i>
Rhus tree	<i>Toxicodendron succedaneum</i>
Salvinia	<i>Salvinia molesta</i>
Senegal tea plant	<i>Gymnocoronis spilanthoides</i>
Siam weed	<i>Chromolaena odorata</i>
Spotted knapweed	<i>Centaurea maculosa</i>
St John's wort	<i>Hypericum perforatum</i>
Water hyacinth	<i>Eichhornia crassipes</i>
Water lettuce	<i>Pistia stratiotes</i>
Willows	<i>Salix spp.</i>

Standard Condition: E16

F. Conditions which must be satisfied prior to any occupation or use of the building (Part 4A of the Act and Part 8 Division 3 of the Regulation)

F.1 Occupation Certificate (section 109M of the Act)

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

Note: New building includes an altered portion of, or an extension to, an existing building.

Standard Condition: F1

F.2 Swimming and Spa Pools – Permanent Child Resistant Barriers and other matters

Prior to any occupation or use of the development and prior to filling any swimming pool as defined by the *Swimming Pool Act 1992*:

- a. Permanent child-resistant barriers must be installed in compliance with the *Swimming Pools Act 1992*.
- b. The *Principal Contractor* or *owner* must apply for and obtain a Compliance Certificate under section 24 of the *Swimming Pools Act 1992*.
- c. Public Pools must comply with the NSW Health Public Swimming Pool and Spa Pool Guidelines in force at that time and private pools are encouraged to comply with the same standards as applicable.

- d. Water recirculation and filtration systems must be installed in compliance with AS 1926.3-2003: *Swimming pool safety - Water recirculation and filtration systems*.

Backwash must be discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996.

- e. Water recirculation and filtration systems must be connected to the electricity supply by a timer that limits the systems operation such that it does not operate:
f. before 8 am or after 8 pm on any Sunday or public holiday, or
before 7 am or after 8 pm on any other day.

Note: The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from: <http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>
Standard Condition: F13

F.3 Amenity Landscaping

The *owner* or *principal contractor* must install all approved amenity landscaping (screen planting, soil stabilisation planting, etc.) prior to any occupation or use of the site. Amended Landscape Plans as required under section C1 of these conditions is to be adhered to at all times.

Note: This condition has been imposed to ensure that the environmental impacts of the development are mitigated by approved landscaping prior to any occupation of the development.
Standard Condition: F6

G. Conditions which must be satisfied prior to the issue of any Subdivision Certificate

No relevant conditions.

H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate (s109C(1)(c))

H.1 Fulfillment of BASIX commitments – Clause 154B of the Regulation

All BASIX commitments must be effected in accordance with the BASIX Certificate No. A13543.

Note: Clause 154B(2) of the Environmental Planning & Assessment Regulation 2000 provides: "A *certifying authority* must not issue a final occupation certificate for a BASIX affected building to which this clause applies unless it is satisfied that each of the commitments whose fulfilment it is required to monitor has been fulfilled."
Standard Condition: H7

H.2 Landscaping

All landscape work including all planting must be completed by the *principal contractor* or *owner* in compliance with the Amended Landscape Plans as required under section C1 of these conditions. The *principal contractor* or *owner* must provide to *PCA* a works-as-executed landscape plan and certification from a qualified landscape architect/designer, horticulturist and/or arborist as applicable to the effect that the works as completed comply with this consent.

Note: This condition has been imposed to ensure that all Landscaping work is completed prior to the issue of the *Final Occupation Certificate*. Standard Condition: H9

H.3 Bush Regeneration

Bush regeneration, if required, must be completed in accordance with current bush regeneration practices. The *principal contractor* or *owner* must provide to PCA certification from a qualified bush regenerator that the works as completed comply with this consent.

Note: This condition has been imposed to ensure that bush regeneration work required under the consent have been completed prior to the issue of any *Final Occupation Certificate*.
Standard Condition: H10

I. Conditions which must be satisfied during the ongoing use of the development

I.1 Maintenance of BASIX commitments

All BASIX commitments must be maintained in accordance with the BASIX Certificate No.A13543.

Note: This condition affects successors in title with the intent that environmental sustainability measures must be maintained for the life of development under this consent.
Standard Condition: I7

I.2 Swimming and Spa Pools – Maintenance

Swimming and Spa Pools must be maintained:

- a. in compliance with the *Swimming Pools Act* 1992 with regard to the provision of child-resistant barriers and resuscitation signs;
- b. in compliance with the NSW Health “Public Swimming Pool and Spa Pool Guidelines” in force at that time. Private pools are encouraged to comply with the same standards as applicable;
- c. in compliance with AS 1926.3-2003:Swimming pool safety - Water recirculation and filtration systems ;
- d. with backwash being discharged to the sewer in compliance with clause 10.9 (Figure 10.2) of AS/NZS 3500.2.2:1996, and
- e. with a timer that limits the recirculation and filtration systems operation such that it does not emit noise that can be heard within a habitable room in any other residential premises (regardless of whether any door or window to that room is open):
 - before 8 am or after 8 pm on any Sunday or public holiday, or
 - before 7 am or after 8 pm on any other day.

Note: Child-resistant barriers, resuscitation signs, recirculation and filtration systems and controls systems require regular maintenance to ensure that life safety, health and amenity standards are maintained.

Note: The NSW Health Public Swimming Pool and Spa Pool Guidelines can be down loaded free from:
<http://www.health.nsw.gov.au/public-health/ehb/general/pools/poolguidelines.pdf>
Standard Condition: I13

I.3 Noise from mechanical plant and equipment

Noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest lot boundary of the site. Where noise sensitive receivers are located within the site, noise from the operation of mechanical plant and equipment must not exceed *background noise* when measured at the nearest strata, stratum or community title boundary.

Reason: This condition has been imposed to protect the amenity of the neighbourhood.

Note: Words in this condition have the same meaning as in the:
NSW Industrial Noise Policy (http://www.environment.nsw.gov.au/resources/ind_noise.pdf)
ISBN 0 7313 2715 2, dated January 2000, and
Noise Guide for Local Government (<http://www.environment.nsw.gov.au/noise/nglg.htm>)
ISBN 1741370671, dated December 2004. Standard Condition: I53

I.4 Maintenance of Landscaping

All landscaping must be maintained in general accordance with this consent.

This condition does not prohibit the planting of additional trees or shrubs subject that they are native species endemic to the immediate locality.

Reason: This condition has been imposed to ensure that the landscaping design intent is not eroded over time by the removal of landscaping or inappropriate exotic planting.

Note: This condition also acknowledges that development consent is not required to plant vegetation and that over time additional vegetation may be planted to replace vegetation or enhance the amenity of the locality. Owners should have regard to the amenity impact of trees upon the site and neighbouring land. Further, drought proof vegetation being native species endemic to the immediate locality is encouraged. Suggested native species endemic to the immediate locality are listed in the Brochure Titled "Local Native Plants for Sydney's Eastern Suburbs" published by Woollahra, Waverley, Randwick and Botany Bay Councils. Standard Condition: I8

J. Miscellaneous Conditions

No relevant conditions.

K. Advisings

K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's www.agd.nsw.gov.au. Standard Advising: K1

K.2 Dial before you dig



The *principal contractor*, *owner builder* or any person digging may be held financially responsible by the asset owner should they damage underground pipe or cable networks. Minimise your risk and Dial 1100 Before You Dig or visit www.dialbeforeyoudig.com.au.

When you contact Dial Before You Dig, you will be sent details of all Dial Before You Dig members who have underground assets in the vicinity of your proposed excavation.

Standard Advising: K2

K.3 Builders Licences and Owner Builders Permits

Section 81A of the *Act* requires among other matters that the person having the benefit of the development consent, if not carrying out the work as an **owner-builder**, must appoint a *principal contractor* for residential building work who must be the holder of a contractor licence.

Further information can be obtained from the NSW Office of Fair Trading website about how you obtain an owner builders permit or find a principal contractor (builder):

<http://www.dft.nsw.gov.au/building.html> .

The Owner(s) must appoint the PCA. The PCA must check that Home Building Act insurance is in place before the commencement of building work. The Principal Contractor (Builder) must provide the Owners with a certificate of insurance evidencing the contract of insurance under the Home Building Act 1989 for the residential building work.

Standard Condition: K5

K.4 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

K.5 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: Further information can be obtained from Workcover NSW's website:

<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:

Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW, Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.

Standard Condition: K7

K.6 Appeal

Council is always prepared to discuss its decisions and, in this regard, please do not hesitate to contact:

Sarah Chambers, Assessment Officer on (02) 9391 7126

However, if you wish to pursue your rights of appeal in the Land & Environment Court you are advised that Council generally seeks resolution of such appeals through a Section 34 Conference, site hearings and the use of Court Appointed Experts, instead of a full Court hearing.

This approach is less adversarial, it achieves a quicker decision than would be the case through a full Court hearing and it can give rise to considerable cost and time savings for all parties involved. The use of the Section 34 Conference approach requires the appellant to agree, in writing, to the Court appointed commissioner having the full authority to completely determine the matter at the conference.

Standard Condition: K14

K.7 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Application for Refund of Security form can be downloaded from <http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>
Standard Condition: K15

K.8 Recycling of Demolition and Building Material

It is estimated that building waste, including disposable materials, resulting from demolition, excavation, construction and renovation, accounts for almost 70% of landfill. Such waste is also a problem in the generation of dust and the pollution of stormwater. Council encourages the recycling of demolition and building materials.

Standard Condition: K17

K.9 Owner Builders

Under the *Home Building Act 1989* any property owner who intends undertaking construction work to a dwelling house or dual occupancy to the value of \$12,000 or over must complete an approved education course and obtain an owner-builder permit from the Office of Fair Trading. See www.fairtrading.nsw.gov.au.

Standard Condition: K18

K.10 Pruning or Removing a Tree Growing on Private Property

Pruning or removal works are NOT permitted within these conditions. If it is deemed necessary to prune or remove an existing tree during works Woollahra Municipal Council's *Tree Preservation Order 2006* (TPO) is likely to require that an application be made to Council prior to pruning or removing any tree. The aim is to secure the amenity of trees and preserve the existing landscape within our urban environment.

Before you prune or remove a tree, make sure you read all relevant conditions. You can obtain a copy of the TPO from Council's website www.woollahra.nsw.gov.au or you may contact Council on 9391-7000 for further advice.

Standard Condition: K19

D8 DA476/2007 – 1 St Michaels Place, Vacluse – Section 82A Review of Refusal – 2/11/2007

Note: Archdeacon Eric Powell and David Plaister of Plaister Consulting Group Pty Ltd addressed the Committee.

(Rundle/Martin)

Resolved: Pursuant to Section 82A of the Environmental Planning and Assessment Act, 1979

THAT the Council, as the consent authority, grant development consent to Development Application No. 476/2007 for the removal of timber shingles and replacement with copper roofing on land at 1 St Michaels Place Vacluse, subject to the following conditions:

A. General Conditions**A.1 Approved Plans and supporting documents**

Those with the benefit of this consent must carry out all work and maintain the use and works in accordance with the plans and supporting documents listed below as submitted by the Applicant and to which is affixed a Council stamp "Approved DA Plans" **unless modified by any following condition**. Where the plans relate to alterations or additions only those works shown in colour or highlighted are approved.

Reference	Description	Author/Drawn	Date(s)
A01	Architectural Plans	Paul Davies	May 2007

Note: Warning to Accredited Certifiers – You should always insist on sighting the original Council stamped approved plans. You should not rely solely upon the plan reference numbers in this condition. Should the applicant not be able to provide you with the original copy Council will provide you with access to its files so you may review our original copy of the approved plan.

Note: These plans and supporting documentation may be subject to conditions imposed under section 80A(1)(g) of the *Act* modifying or amending the development (refer to conditions which must be satisfied prior to the issue of any *Construction Certificate*.)
Standard Condition: A5

B. Conditions which must be satisfied prior to the demolition of any building or construction**B.1 Construction Certificate required prior to any demolition**

Where demolition is associated with an altered portion of, or an extension to an existing building the demolition of any part of a building is "commencement of erection of building" pursuant to section 81A(2) of the Act. In such circumstance all conditions in Part C and Part D of this consent must be satisfied prior to any demolition work. This includes, but is not limited to, the issue of a Construction Certificate, appointment of a PCA and Notice of Commencement under the Act.

Note: See *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.
Standard Condition: B1

C. Conditions which must be satisfied prior to the issue of a Construction Certificate

C.1 Payment of Long Service Levy, Security, Development Levy and Fees

The certifying authority must not issue any Part 4A Certificate until provided with the original receipt(s) for the payment of all of the following levy, security, contributions, and fees prior to the issue of a construction certificate.

Description	Amount	Indexed	Council Fee Code
LONG SERVICE LEVY under Building and Construction Industry Long Service Payments Act 1986			
Long Service Levy http://www.lspc.nsw.gov.au/levy_information/?levy_information/levy_calculator.stm	Contact LSL Corporation	No	
SECURITY under section 80A(6) of the Environmental Planning and Assessment Act 1979			
Property Damage Security Deposit - making good damage caused to any property of the <i>Council</i> as a consequence of the doing of anything to which the consent relates	\$8,000	No	T600
DEVELOPMENT LEVY under Woollahra Section 94A Development Contributions Plan 2005 This plan may be inspected at Woollahra Council or downloaded from our website www.woollahra.nsw.gov.au .			
Development Levy	\$3,000 + Index Amount	Yes, quarterly	T94
INSPECTION FEES under section 608 of the Local Government Act 1993			
Security Administration Fee	\$163	No	T16
TOTAL SECURITY, CONTRIBUTIONS, LEVIES AND FEES	\$11,163 plus any relevant indexed amounts and long service levy		

How must the payments be made?

Payments must be made by:

1. Cash deposit with Council,
2. Credit card payment with Council, or
3. Bank cheque made payable to Woollahra Municipal Council.

The payment of a security may be made by a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

How will the section 94A levy be indexed?

To ensure that the value of the development levy is not eroded over time by increases in costs, the proposed cost of carrying out development (from which the development levy is calculated) will be indexed either annually or quarterly (see table above). Clause 3.13 of the Woollahra Section 94A Development Contributions Plan 2005 sets out the formula and index to be used in adjusting the s.94A levy.

Do you need HELP indexing the levy?

Please contact our customer service officers. Failure to correctly calculate the development levy will delay the issue of any Part 4A Certificate and could void any Part 4A Certificate (construction certificate, subdivision certificate, or occupation certificate).

Deferred periodic payment of section 94A levy under the Woollahra Section 94A Development Contributions Plan 2005

Where the applicant makes a written request supported by reasons for payment of the section 94A levy other than as required by clause 3.9, the Council may accept deferred or periodic payment. The decision to accept a deferred or periodic payment is at the sole discretion of the Council, which will consider:

- a) the reasons given;
- b) whether any prejudice will be caused to the community deriving benefit from the public facilities;
- c) whether any prejudice will be caused to the efficacy and operation of this plan; and
- d) whether the provision of public facilities in accordance with the adopted works schedule will be adversely affected.

Council may, as a condition of accepting deferred or periodic payment, require the provision of a bank guarantee where:

- a) the guarantee is by an Australian bank for the amount of the total outstanding contribution;
- b) the bank unconditionally agrees to pay the guaranteed sum to the Council on written request by Council on completion of the development or no earlier than 12 months from the provision of the guarantee whichever occurs first;
- c) the bank agrees to pay the guaranteed sum without reference to the applicant or landowner or other person who provided the guarantee and without regard to any dispute, controversy, issue or other matter relating to the development consent or the carrying out of development in accordance with the development consent; and
- d) the bank's obligations are discharged when payment to the Council is made in accordance with the guarantee or when Council notifies the bank in writing that the guarantee is no longer required.

Any deferred or outstanding component of the section 94A levy will be adjusted in accordance with clause 3.13 of the plan. The applicant will be required to pay any charges associated with establishing or operating the bank guarantee. Council will not cancel the bank guarantee until the outstanding contribution as indexed and any accrued charges are paid.

C.2 Structural Adequacy of Existing Supporting Structures

A certificate from a *professional engineer* (Structural Engineer), certifying the adequacy of the existing supporting structure to support the additional loads proposed to be imposed by the development, must be submitted with the *Construction Certificate* application.

Note: This condition is imposed to ensure that the existing structure structural is able to support the additional loads proposed.

Standard Condition: C35

C.3 Stormwater discharge to existing *Stormwater Drainage System* (Clause 25(2) WLEP 1995)

The *Construction Certificate* plans and specifications required by clause 139 of the *Regulation*, must detail:

- a. the location of the existing *Stormwater Drainage System* including all pipes, inspection openings, surface drains, pits and their discharge location,
- b. the state of repair of the existing *Stormwater Drainage System*,
- c. any remedial works required to upgrade the existing *Stormwater Drainage System* to comply with the BCA,

- d. any remedial works required to upgrade the existing *Stormwater Drainage System* crossing the footpath and any new kerb outlets,
- e. any new *Stormwater Drainage System* complying with the BCA,
- f. interceptor drain(s) at the site boundary to prevent stormwater flows from the site crossing the footpath,
- g. any rainwater tank required by BASIX commitments including their overflow connection to the *Stormwater Drainage System*, and
- h. general compliance with the Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004)

Where any new *Stormwater Drainage System* crosses the footpath area within any road, separate approval under section 138 of the *Roads Act 1993* must be obtained from Council for those works prior to the issue of any *Construction Certificate*.

All *Stormwater Drainage System* work within any road or public place must comply with Woollahra Municipal Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003.

Note: Clause F1.1 of Volume 1 and Part 3.1.2 of Volume 2 of the BCA provide that stormwater drainage complying with AS/NZS 3500.3 Plumbing and drainage - Part 3: Stormwater drainage is deemed-to-satisfy the BCA. Council's specifications apply in relation to any works with any road or public place.

Note: Stormwater Drainage Systems must not discharge to any Sewer System. It is illegal to connect stormwater pipes and drains to the sewerage system as this can overload the system and cause sewage overflows. See:

<http://www.sydneywater.com.au/Publications/Factsheets/SewerfixLookingAfterYourSewerPipes.pdf>

Note: Woollahra Municipal Council's *Specification for Roadworks, Drainage and Miscellaneous Works* dated January 2003 and Council's draft Development Control Plan Stormwater Drainage Management (draft version 1, public exhibition copy dated 23 August 2004) can be downloaded from Council's website:

www.woollahra.nsw.gov.au

Standard Condition: C49

D. Conditions which must be satisfied prior to the commencement of any development work

D.1 Site Signs

The *Principal Contractor* or *owner builder* must ensure that the sign required by clauses 98A and 227A of the *Regulation* is erected and maintained at all times.

"Erection of signs

1. For the purposes of section 80A (11) of the *Act*, the requirements of subclauses (2) and (3) are prescribed as conditions of a development consent for development that involves any building work, subdivision work or demolition work.
2. A sign must be erected in a prominent position on any site on which building work, subdivision work or demolition work is being carried out:
 - a. showing the name, address and telephone number of the principal certifying authority for the work, and
 - b. showing the name of the principal contractor (if any) for any building work and a telephone number on which that person may be contacted outside working hours, and
 - c. stating that unauthorised entry to the work site is prohibited.
3. Any such sign is to be maintained while the building work, subdivision work or demolition work is being carried out, but must be removed when the work has been completed.

4. This clause does not apply in relation to building work, subdivision work or demolition work that is carried out inside an existing building that does not affect the external walls of the building.
5. This clause does not apply in relation to Crown building work that is certified, in accordance with section 116G of the Act, to comply with the technical provisions of the State's building laws."

Note: *PCA* and *principal contractors* must also ensure that signs required by this clause are erected and maintained (see clause 227A which imposes a penalty exceeding \$1,000).

Note: If *Council* is appointed as the *PCA* it will provide the sign to the *principal contractor* or *owner builder* who must ensure that the sign is erected and maintained as required by Clause 98A of the *Regulation*.
Standard Condition: D12

D.2 Building - Construction Certificate, Appointment of Principal Certifying Authority, Appointment of Principal Contractor and Notice of Commencement (s81A(2) of the Act)

The erection of the building in accordance with this development consent must not be commenced until:

- a. a construction certificate for the building work has been issued by the consent authority, the council (if the council is not the consent authority) or an accredited Certifier, and
- b. the person having the benefit of the development consent has:
 - i. appointed a principal certifying authority for the building work, and
 - ii. notified the principal certifying authority that the person will carry out the building work as an owner-builder, if that is the case, and
- b1. the principal certifying authority has, no later than 2 days before the building work commences:
 - i. notified the consent authority and the council (if the council is not the consent authority) of his or her appointment, and
 - ii. notified the person having the benefit of the development consent of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
- b2. the person having the benefit of the development consent, if not carrying out the work as an owner-builder, has:
 - i. appointed a principal contractor for the building work who must be the holder of a contractor licence if any residential building work is involved, and
 - ii. notified the principal certifying authority of any such appointment, and
 - iii. unless that person is the principal contractor, notified the principal contractor of any critical stage inspections and other inspections that are to be carried out in respect of the building work, and
 - iv. given at least 2 days' notice to the council of the person's intention to commence the erection of the building.

Note: *building* has the same meaning as in section 4 of the *Act* and includes part of a building and any structure or part of a structure.

Note: *new building* has the same meaning as in section 109H of the *Act* and includes an altered portion of, or an extension to, an existing building.

Note: The commencement of demolition works associated with an altered portion of, or an extension to, an existing building is considered to be the commencement of building work requiring compliance with section 82A(2) of the *Act* (including the need for a *Construction Certificate*) prior to any demolition work. See: *Over our Dead Body Society Inc v Byron Bay Community Association Inc* [2001] NSWLEC 125.

Note: *Construction Certificate* Application, *PCA* Service Agreement and *Notice of Commencement* forms can be downloaded from Council's website www.woollahra.nsw.gov.au.

Note: It is an offence for any person to carry out the erection of a *building* in breach of this condition and in breach of section 81A(2) of the *Act*.
Standard Condition: D15

E. Conditions which must be satisfied during any development work

E.1 Compliance with Building Code of Australia and insurance requirements under the Home Building Act 1989

For the purposes of section 80A (11) of the *Act*, the following condition is prescribed in relation to a development consent for development that involves any building work:

- a. that the work must be carried out in accordance with the requirements of the Building Code of Australia,
- b. in the case of residential building work for which the Home Building Act 1989 requires there to be a contract of insurance in force in accordance with Part 6 of that Act, that such a contract of insurance is in force before any building work authorised to be carried out by the consent commences.

This condition does not apply:

- a. to the extent to which an exemption is in force under clause 187 or 188, subject to the terms of any condition or requirement referred to in clause 187 (6) or 188 (4) of the *Regulation*, or
- b. to the erection of a temporary building.

In this clause, a reference to the *BCA* is a reference to that Code as in force on the date the application for the relevant construction certificate is made.

Standard Condition: E1

E.2 Compliance with Australian Standard for Demolition

Demolition of buildings and structures must comply with Australian Standard AS 2601—1991: The Demolition of Structures, published by Standards Australia, and as in force at 1 July 1993.

Standard Condition: E2

E.3 Critical Stage Inspections

Critical stage inspections must be called for by the *principal contractor* or *owner builder* as required by the *PCA*, any *PCA* service agreement, the *Act* and the *Regulation*.

Work must not proceed beyond each critical stage until the PCA is satisfied that work is proceeding in accordance with this consent, the Construction Certificate(s) and the *Act*. *critical stage inspections* means the inspections prescribed by the *Regulations* for the purposes of section 109E(3)(d) of the *Act* or as required by the *PCA* and any *PCA Service Agreement*.

Note: The PCA may require inspections beyond mandatory critical stage inspections in order that the PCA be satisfied that work is proceeding in accordance with this consent.

Note: The PCA may, in addition to inspections, require the submission of *Compliance Certificates*, survey reports or evidence of suitability in accordance with Part A2.2 of the *BCA* in relation to any matter relevant to the development.

Standard Condition: E5

E.4 Hours of Work –Amenity of the neighbourhood

- a. No *work* must take place on any Sunday or public holiday,
- b. No *work* must take place before 7am or after 5pm any weekday,
- c. No *work* must take place before 7am or after 1pm any Saturday, and
- d. No piling, piercing, cutting, boring, drilling, rock breaking, rock sawing, jack hammering or bulk excavation of land or loading of material to or from trucks must take place before 9am or after 4pm any weekday, or before 9am or after 1pm any Saturday.
- e. No rock excavation being cutting, boring, drilling, breaking, sawing, jack hammering or bulk excavation of rock, must occur without a 15 minute break every hour.

This condition has been imposed to mitigate the impact of work upon the amenity of the neighbourhood. Impact of work includes, but is not limited to, noise, vibration, dust, odour, traffic and parking impacts.

Note: The use of noise and vibration generating plant and equipment and vehicular traffic, including trucks in particular, significantly degrade the amenity of neighbourhoods and more onerous restrictions apply to these activities. This more invasive work generally occurs during the foundation and bulk excavation stages of development. If you are in doubt as to whether or not a particular activity is considered to be subject to the more onerous requirement (9am to 4pm weekdays and 9am to 1pm Saturdays) please consult with Council.

Note: Each and every breach of this condition by any person may be subject to separate penalty infringement notice or prosecution.

Note: The delivery and removal of plant, equipment and machinery associated with wide loads subject to RTA and Police restrictions on their movement out side the approved hours of work will be considered on a case by case basis.

Note: Compliance with these hours of work does not affect the rights of any person to seek a remedy to offensive noise as defined by the *Protection of the Environment Operations Act 1997*, the *Protection of the Environment Operations (Noise Control) Regulation 2000*.

Note: EPA Guidelines can be down loaded from <http://www.epa.nsw.gov.au/noise/nglg.htm> .

Note: see http://www.epa.nsw.gov.au/resources/ci_build_sheet7.pdf

Standard Condition: E6

E.5 Placement and use of Skip Bins

The *principal contractor* or *owner builder* must ensure that all waste storage containers, including but not limited to skip bins, must be stored within the site unless:

- a) Activity Approval has been issued by Council under section 94 of the *Local Government Act 1993* to place the waste storage container in a public place, and
- b) Where located on the road it is located only in a positions where a vehicle may lawfully park in accordance with the Australian Road Rules to the extent they are adopted under the *Road Transport (Safety and Traffic Management) (Road Rules) Regulation 1999*.

Note: Waste storage containers must not be located on the footpath without a site specific activity approval. Where such site specific activity approval is granted a 1.5m wide clear path of travel is maintained free of any trip hazards.
Standard Condition: E21

F. Conditions which must be satisfied prior to any occupation or use of the building

F.1 Occupation Certificate (section 109M of the Act)

A person must not commence occupation or use of the whole or any part of a new building (within the meaning of section 109H (4) of the *Act*) unless an occupation certificate has been issued in relation to the building or part.

Note: New building includes an altered portion of, or an extension to, an existing building.
Standard Condition: F1

G. Conditions which must be satisfied prior to the issue of a Subdivision Certificate

Nil.

H. Conditions which must be satisfied prior to the issue of a Final Occupation Certificate

Nil.

I. Conditions which must be satisfied during the ongoing use of the development

Nil.

J. Miscellaneous conditions

Nil.

K. Advisings

K.1 Criminal Offences – Breach of Development Consent & Environmental laws

Failure to comply with this development consent and any condition of this consent is a **criminal offence**. Failure to comply with other environmental laws are also a criminal offence.

Where there is any breach Council may without any further warning:

- Issue Penalty Infringement Notices (On-the-spot fines);
- Issue notices and orders;
- Prosecute any person breaching this consent; and/or
- Seek injunctions/orders before the courts to restrain and remedy any breach.

Warnings as to potential maximum penalties

Maximum Penalties under NSW Environmental Laws include fines up to \$1.1 Million and/or custodial sentences for serious offences.

Warning as to enforcement and legal costs

Should Council have to take any action to enforced compliance with this consent or other environmental laws Council's policy is to seek from the Court appropriate orders requiring the payments of its costs beyond any penalty or remedy the Court may order.

This consent and this specific advice will be tendered to the Court when seeking costs orders from the Court where Council is successful in any necessary enforcement action.

Note: The payment of environmental penalty infringement notices does not result in any criminal offence being recorded. If a penalty infringement notice is challenged in Court and the person is found guilty of the offence by the Court, subject to section 10 of *the Crimes (Sentencing Procedure) Act 1999*, a criminal conviction is recorded. The effect of a criminal conviction beyond any fine is serious. You can obtain further information from the following web sites:

<http://www.theshopfront.org/documents/ConvictionsCriminalRecords.pdf> and the Attorney General's www.agd.nsw.gov.au.

Standard Advising: K1

K.2 Building Standards - Guide to Standards and Tolerances

The PCA does not undertake detailed quality control inspections and the role of the PCA is primarily to ensure that the development proceeds in accordance with this consent, Construction Certificates and that the development is fit for occupation in accordance with its classification under the Building Code of Australia. Critical Stage Inspections do not provide the level of supervision required to ensure that the minimum standards and tolerances specified by the "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8 are achieved.

The quality of any development is a function of the quality of the *principal contractor's* or *owner builder's* supervision of individual contractors and trades on a daily basis during the development. The PCA does not undertake this role.

The NSW Office of Fair Trading have published a "Guide to Standards and Tolerances©" ISBN 0 7347 6010 8. The guide can be obtained from the Office of Fair Trading by calling 13 32 20 or by Fax: 9619 8618 or by post to: Marketing Branch, PO Box 972, Parramatta NSW 2124.

The Guide can be down loaded from:

<http://www.fairtrading.nsw.gov.au/pdfs/corporate/publications/dft242.pdf>

Council, as the PCA or otherwise, does not adjudicate building contract disputes between the *principal contractor*, contractors and the owner.

Standard Condition: K6

K.3 Workcover requirements

The *Occupational Health and Safety Act 2000 No 40* and subordinate regulations, codes of practice and guidelines control and regulate the development industry.

Note: Further information can be obtained from Workcover NSW's website:
<http://www.workcover.nsw.gov.au/Industry/Construction/default.htm> or through their head office:
Location: Workcover NSW, 92-100 Donnison Street, GOSFORD 2250 Postal address: WorkCover NSW,
Locked Bag 2906, LISAROW 2252, Phone (02) 4321 5000, Fax (02) 4325 4145.
Standard Condition: K7

K.4 Release of Security

An application must be made to Council by the person who paid the security for release of the securities held under section 80A of the *Act*.

The securities will not be released until a *Final Occupation Certificate* has lodged with Council, Council has inspected the site and Council is satisfied that the public works have been carried out to Council's requirements. Council may use part or all of the security to complete the works to its satisfaction if the works do not meet Council's requirements.

Council will only release the security upon being satisfied that all damage or all works, the purpose for which the security has been held have been remedied or completed to Council's satisfaction as the case may be.

Council may retain a portion of the security to remedy any defects in any such public work that arise within 6 months after the work is completed.

Upon completion of each section of road, drainage and landscape work to Council's satisfaction, 90% of the Bond monies held by Council for these works will be released upon application. 10% may be retained by Council for a further 6 month period and may be used by Council to repair or rectify any defects or temporary works during the 6 month period.

Note: The Application for Refund of Security form can be downloaded from
<http://www.woollahra.nsw.gov.au/pdf/Forms/Planning/RefundofSecurity.pdf>
Standard Condition: K15

D9 DA1/2007 – 129 Hopetoun Avenue, Vaucluse – Demolition of existing residential flat building & construction of new residential flat building including basement parking, new swimming pool, landscaping & site works – 2/1/2007

Note: Late correspondence was tabled by Simon Taylor Council's Assessment Officer.

(Shoebridge/Gardner)

Resolved:

- A. THAT Development Application No. 1/2007 for the demolition of the existing residential flat building and the construction of a new residential flat building including basement parking, new swimming pool, landscaping and site works on land at 129 Hopetoun Avenue Vaucluse, be deferred to a future meeting of the Development Control Committee to allow the applicant and objectors to be notified of the meeting to consider the application.
- B. That further investigation by Council's Technical Services Division be undertaken of the excavation area as highlighted on the tabled plans.

- C. That the applicant be requested to submit a more detailed geotechnical report which is to be reviewed by Council's Technical Services Division.
- D. THAT in accordance with Council's policy of confidentiality, the confidential report remain confidential for a period of six (6) months.

D10 Register of Current Land and Environment Court Appeals for Development Applications

(Dawson/Martin)

Resolved:

THAT the attached register of current Land and Environment Court Appeals for Development Applications be received and noted.

Items with Recommendations from this Committee Submitted to the Council for Decision (Items R1 to R2)

R1 DA606/2005 Part 2 – 54 Kings Road, Vacluse – Section 96 Application – Proposed modification addition of plant room & addition of louvered openings – 12/9/2007

Note: In accordance with Council's meeting procedures and policy this matter is referred to full Council due to a substantive change of the Committee's recommendation (refusal) to the officers recommendation (approval).

Note: Late correspondence was tabled by Simon Taylor Council's Assessment Officer, Glen Alpine Properties Pty Ltd, Dean J Constantine and Craig Jenner – Team Leader Compliance

Note: Dean Constantine of Vacluse, objector addressed the Committee.

(Gardner/Martin)

Recommendation:

THAT Council, as the consent authority, refuse to modify development consent to Development Application No. 606/2005 part 2 for the demolition of the existing dwelling and construction of new dwelling; landscaping and site works on land at 54 Kings Road Vacluse, for the following reasons:

1. The proposed development involves extensive unauthorised works.
2. Inadequate natural ventilation is provided to the habitable areas of the lower ground floor of the building.
3. Inadequate information has been provided, including the absence of an acoustic report and plans, to enable a proper assessment of the application.
4. The proposed development results in there being an excessive floor space ratio.

5. The proposed development results in there being excessive excavation.
6. The proposed development will adversely impact on the acoustic privacy of 56 Kings Rd.
7. The proposed development is not in the public interest.

R2 DA318/2005 Part 2 – 41 Cascade Street, Paddington - Section 96 Application – Proposed modification including modifications to balcony to the rear, reconstruction of shed, deletion of rear deck & modification to rear courtyard layout – 11/1/2008

Note: In accordance with Council's meeting procedures and policy this matter is referred to full Council due to a substantive change of the Committee's recommendation (refusal) to the officers recommendation (approval).

Note: Late correspondence was tabled by Caroline Owen Council's Assessment Officer, Barbara Merz & David Grayce & Allen & Pam Smith.

Note: Allen & Pam Smith of Paddington, Barbara Merz & David Grayce of Paddington and Olimpia Marina of Paddington, objectors, and Chris Johns and Chris McKenan of Ergo Architects addressed the Committee.

(Shoebridge/Gardner)

Recommendation:

- A. THAT Council, as the consent authority, refuse to modify development consent to Development Application No. 318/2005 part 2 for mixed residential/commercial on land at 41 Cascade Street Paddington, for the following reasons:
 - unacceptable proposal for concrete slabs and a steel balustrade to the rear, not compatible with materials recommended in the DCP
 - issues of access and egress
 - unacceptable intensification
 - not in the public interest
- B. THAT the drawing and photographs tabled at the meeting be referred to the Manager of Compliance to investigate the unauthorised works shown in the drawing and photographs.

There being no further business the meeting concluded at 10.06pm.

We certify that the pages numbered 990 to 1106 inclusive are the Minutes of the Development Control Committee Meeting held on 7 April 2008 and confirmed by the Development Control Committee on 21 April 2008 as correct.

Chairperson

Secretary of Committee